

A Cut-Free ExpTime Tableau Decision Procedure for the Logic Extending Converse-PDL with Regular Inclusion Axioms^{*}

Linh Anh Nguyen

Institute of Informatics, University of Warsaw
Banacha 2, 02-097 Warsaw, Poland
nguyen@mimuw.edu.pl

Abstract. We give the first cut-free EXPTIME (optimal) tableau decision procedure for the logic CPDL_{reg} , which extends Converse-PDL with regular inclusion axioms characterized by finite automata. The logic CPDL_{reg} is the combination of Converse-PDL and regular grammar logic with converse. Our tableau decision procedure uses global state caching and has been designed to increase efficiency and allow various optimization techniques, including on-the-fly propagation of local and global (in)consistency.

1 Introduction

In this paper we study automated reasoning in the modal logic CPDL_{reg} , which is a combination of CPDL (propositional dynamic logic with converse [16,2,21]) and REG^c (regular grammar logic with converse [5,22]). The logic CPDL is widely used in many areas, including program verification, theory of action and change as well as knowledge representation (see, e.g., [16,9,7]). The logic REG^c can be used for modeling and reasoning about epistemic states of multi-agent systems [12] and Web ontologies [22,17].

In the papers [6,8] written jointly with Dunin-Kępicz and Szałas, we show that CPDL_{reg} is a logical formalism suitable for expressing complex properties of agents' cooperation in terms of beliefs, goals and intentions. The logic CPDL_{reg} can also be used as a description logic (DL). As a combination of CPDL and REG^c , it allows to use role constructors (by program constructors of CPDL) like the DL \mathcal{CIQ} [9] and to use role inclusion axioms (by inclusion axioms of REG^c) similarly to the DL \mathcal{SROIQ} [17] (but by using automata instead of grammar rules).

The mentioned works [6,8] present a tableau calculus leading to the first EXPTIME (optimal) tableau decision procedure for CPDL_{reg} . Observing the rules of that calculus, it can be seen that the general satisfiability checking problem in CPDL_{reg} is reducible to the satisfiability checking problem in CPDL. However, translating the finite automata of a given CPDL_{reg} logic L into regular expressions and then applying an EXPTIME (optimal) decision procedure like the ones given by us and Szałas [21] or by Goré and Widmann [15] for the resulted satisfiability problem in CPDL may require double exponential time in the size of the original problem. The reason is that the regular expressions resulted from translating the finite automata specifying L may have exponential lengths. One can also consider the method of translating REG^c into CPDL given in [4] by Demri and de Nivelle. However, as CPDL_{reg} is much more complicated than REG^c , it is not trivial at all how to generate that method for translating CPDL_{reg} into CPDL and how efficient the approach would be. Therefore, as stated in [8], it is worth studying the direct approach for automated reasoning in CPDL_{reg} .

The tableau calculus given in our joint papers [6,8] for CPDL_{reg} uses analytic cuts and therefore is not efficient in practice. In this paper we improve that calculus by eliminating cuts to give the first cut-free EXPTIME (optimal) tableau decision procedure for CPDL_{reg} . Our calculus uses global state caching as in the works [14,15] by Goré and Widmann. It also uses local caching for non-states of tableaux.

The idea of global caching comes from Pratt's paper on PDL [24]. In [11,12,13] together with Goré we formalized and applied it to the modal logics REG (regular grammar logics),

^{*} This work is supported by Polish National Science Centre grant 2011/01/B/ST6/02759.

BReg (regular modal logics of agent beliefs) and the description logic \mathcal{SHI} to obtain EXPTIME (optimal) tableau decision procedures for these logics. Later, together with Szalas we extended the method to give EXPTIME (optimal) tableau decision procedures for the logics PDL [23], CPDL [21] and REG^c [22]. In [13,21,22] we used analytic cuts to deal with inverse roles and converse modal operators. As cuts are not efficient in practice, Goré and Widmann developed the first cut-free EXPTIME tableau decision procedures, based on global state caching, for the DL \mathcal{ALCZ} [14] and CPDL [15].

In the current paper, we use the idea of global state caching and a slightly different technique to deal with converse modal operators for CPDL_{reg} . We check “compatibility” of a non-state w with its predecessor-state v as soon as possible and do not require w to be “saturated”. In [14,15] Goré and Widmann require w to be “saturated” before checking the compatibility, which has a serious drawback, for example, when the label of v is of the form $\{p, \langle \sigma \rangle [\sigma^-] \neg p, [\sigma]((p_1 \vee q_1) \wedge \dots \wedge (p_n \vee q_n))\}$. Besides, we tend to give a higher priority for the current branch even when it involves converse, while Goré and Widmann [14,15] tend to delay solving incompatibility w.r.t. converse.¹ Our technique of dealing with converse modal operators for CPDL_{reg} can be described as follows: if a state v is “toosmall” due to the lack of a formula φ and a non-state u is the unique predecessor of v then delete the edge (u, v) and connect u to two nodes v_1 and v_2 (which are created when necessary) such that v_1 extends v with φ and v_2 is similar to v but always “disallows” φ (i.e. if any non-state w having v_2 as the predecessor-state requires adding φ to v_2 then we give w status *unsat*). For simplicity, in the current version of this paper we do not consider separately the case when v is “toosmall” due to the lack of a set $\{\varphi_1, \dots, \varphi_k\}$ of formulas (like an “alternative set” [14,15]) with $k > 1$. The slowdown is not high as we check “compatibility” between nodes as soon as possible. A generalization of our method for this case is straightforward: we delete the edge (u, v) and connect u to nodes v_0, v_1, \dots, v_k (which are created when necessary) such that v_0 extends v with $\{\varphi_1, \dots, \varphi_k\}$ and, for each $1 \leq i \leq k$, v_i is similar to v but always disallows φ_i .

Apart from [6,8,14,15], some other papers that are most related to ours are: Pratt’s paper [24] on PDL, Demri’s paper [3] of REG, the paper [5] by Demri and de Nivelle on REG^c , the paper [2] by De Giacomo and Massacci on CPDL. Also, one can translate the satisfiability problem of CPDL_{reg} into the satisfiability problem of modal μ -calculus with converse or the emptiness problem of automata on infinite trees. The former one is often translated into the latter one (see Vardi’s work [26]). Checking emptiness of an automaton on infinite trees can be reduced to checking who has a winning strategy in a graph of game, which is similar to “and-or” graphs used in the current paper. However, the construction of such a tree automaton itself is a weak point of the approach. As stated in [1], optimization techniques have not been adequately studied for theorem proving based on tree automata, and this is why the approach is not used in practice for theorem proving in description logics (which are closely related to modal logics).

The rest of this paper is structured as follows. In Section 2 we give definitions for the logic CPDL_{reg} . In Section 3 we present our tableau calculus for CPDL_{reg} . In Section 5 we give an EXPTIME tableau decision procedure for checking satisfiability of a set of formulas w.r.t. a set of global assumption in CPDL_{reg} . We conclude in Section 7.

2 Preliminaries

Let Σ_+ be a finite set of symbols. For $\sigma \in \Sigma_+$, we use σ^- to denote a fresh symbol, called the *converse* of σ . Let $\Sigma_- = \{\sigma^- \mid \sigma \in \Sigma_+\}$ and $\Sigma = \Sigma_+ \cup \Sigma_-$. We call Σ an *alphabet with converse*. For $\varrho = \sigma^- \in \Sigma_-$, define $\varrho^- = \sigma$.

A *context-free semi-Thue system* S over Σ is a finite set of context-free production rules over alphabet Σ . We say that S is *symmetric* if, for every rule $\sigma \rightarrow \varrho_1 \dots \varrho_k$ of S , the rule

¹ We use the verb “tend” because any systematic search strategy is applicable for both [14,15] and the current paper. Nevertheless, the “tendency” can still be observed.

$\sigma^- \rightarrow \varrho_k^- \dots \varrho_1^-$ also belongs to S . A context-free semi-Thue system S over Σ is called a *regular semi-Thue system* S over Σ if, for every $\sigma \in \Sigma$, the set of words derivable from σ using the system is a regular language over Σ .

A context-free semi-Thue system is like a context-free grammar, but it has no designated start symbol and there is no distinction between terminal and non-terminal symbols.

Similarly to [5], we assume that any regular semi-Thue system S is given together with a mapping \mathbf{A} that associates each $\sigma \in \Sigma$ with a finite automaton \mathbf{A}_σ recognizing words derivable from σ using S . We assume that for $\sigma \in \Sigma$, the word σ is derivable from σ by such a system. We call \mathbf{A} the *mapping specifying the finite automata of S* .²

A *finite automaton* A over alphabet Σ is a tuple $\langle \Sigma, Q, I, \delta, F \rangle$, where Q is a finite set of states, $I \subseteq Q$ is the set of initial states, $\delta \subseteq Q \times \Sigma \times Q$ is the transition relation, and $F \subseteq Q$ is the set of accepting states. A *run* of A on a word $\varrho_1 \dots \varrho_k$ is a finite sequence of states q_0, q_1, \dots, q_k such that $q_0 \in I$ and $\delta(q_{i-1}, \varrho_i, q_i)$ holds for every $1 \leq i \leq k$. It is an *accepting run* if $q_k \in F$. We say that A *accepts* a word w if there exists an accepting run of A on w . The set of words accepted by A is denoted by $\mathcal{L}(A)$.

We use \mathcal{PROP} to denote the set of *propositions* (i.e., atomic formulas) and use letters like p to denote its elements. We call elements of Σ_+ *atomic programs*, and call elements of Σ *simple programs*. We denote simple programs by letters like σ and ϱ .

Formulas and programs in the *base language* of CPDL_{reg} are defined respectively by the following BNF grammar rules:

$$\begin{aligned} \varphi &::= \top \mid \perp \mid p \mid \neg\varphi \mid \varphi \rightarrow \varphi \mid \varphi \wedge \varphi \mid \varphi \vee \varphi \mid \langle \alpha \rangle \varphi \mid [\alpha] \varphi \\ \alpha &::= \sigma \mid \alpha; \alpha \mid \alpha \cup \alpha \mid \alpha^* \mid \alpha^- \mid \varphi? \end{aligned}$$

We use letters like α, β to denote programs, and φ, ψ, ξ to denote formulas. Given binary relations R_1 and R_2 , by $R_1 \circ R_2$ we denote their relational composition.

A *Kripke model* is a pair $M = \langle \Delta^M, \cdot^M \rangle$, where Δ^M is a set of *states*, and \cdot^M is an interpretation function that maps each proposition p to a subset p^M of Δ^M , and each atomic program $\sigma \in \Sigma_+$ to a binary relation σ^M on Δ^M . The interpretation function is extended to interpret complex formulas and complex programs as follows:

$$\begin{aligned} \top^M &= \Delta^M, \quad \perp^M = \emptyset \\ (\neg\varphi)^M &= \Delta^M \setminus \varphi^M, \quad (\varphi \rightarrow \psi)^M = (\neg\varphi \vee \psi)^M \\ (\varphi \wedge \psi)^M &= \varphi^M \cap \psi^M, \quad (\varphi \vee \psi)^M = \varphi^M \cup \psi^M \\ (\langle \alpha \rangle \varphi)^M &= \{x \in \Delta^M \mid \exists y[\alpha^M(x, y) \wedge \varphi^M(y)]\} \\ ([\alpha] \varphi)^M &= \{x \in \Delta^M \mid \forall y[\alpha^M(x, y) \rightarrow \varphi^M(y)]\} \\ (\alpha; \beta)^M &= \alpha^M \circ \beta^M \\ (\alpha \cup \beta)^M &= \alpha^M \cup \beta^M, \quad (\alpha^*)^M = (\alpha^M)^* \\ (\alpha^-)^M &= (\alpha^M)^{-1} = \{(y, x) \mid (x, y) \in \alpha^M\} \\ (\varphi?)^M &= \{(x, x) \mid \varphi^M(x)\}. \end{aligned}$$

We write $M, w \models \varphi$ to denote $w \in \varphi^M$. For a set X of formulas, we write $M, w \models X$ to denote that $M, w \models \varphi$ for all $\varphi \in X$. If $M, w \models \varphi$ (respectively, $M, w \models X$), then we say that M *satisfies* φ (respectively, X) *at* w , and that φ (respectively, X) is *satisfied at* w in M . We say that M *validates* X (and X is *valid in* M) if $M, w \models X$ for all $w \in \Delta^M$.

Note that the definition of $(\sigma^-)^M$ is compatible with the assumption $(\sigma^-)^- = \sigma$.

Let S be a symmetric regular semi-Thue system over Σ . The CPDL_{reg} logic corresponding to S , denoted by $CPDL(S)$, is characterized by the class of Kripke models M such that, for

² Note that it is undecidable to check whether a context-free semi-Thue system is regular since it is undecidable whether the language generated by a linear grammar is regular [18].

every rule $\sigma \rightarrow \varrho_1 \dots \varrho_k$ of S , we have that $\varrho_1^M \circ \dots \circ \varrho_k^M \subseteq \sigma^M$. Such a structure is called an L -model, for $L = \text{CPDL}(S)$.

Let L be a CPDL_{reg} logic and X, Γ be finite sets of formulas. We say that X is L -satisfiable w.r.t. the set Γ of global assumptions if there exists an L -model that validates Γ and satisfies X at some state.

We say that two sets X and Y of formulas are L -equivalent if for every L -model M and every state w of M , $(M, w \models X)$ iff $(M, w \models Y)$.

A formula or a program is in *negation-and-converse normal form* (NCNF) if it does not use the connective \rightarrow , uses the operator \neg only immediately before propositions, and uses the converse program constructor $^-$ only for atomic programs.

Every formula φ (respectively, program α) can be transformed to a formula φ' (respectively, program α') in NCNF that is equivalent to φ (respectively, α) in the sense that for every Kripke model M , $\varphi^M = (\varphi')^M$ (respectively, $\alpha^M = (\alpha')^M$). For example, the NCNF of formula $\neg[(\sigma_1 \cup \sigma_2); \sigma_3^*; (\neg p)?]^\neg(q \vee \neg r)$ is $\langle p?; (\sigma_3^-)^*; (\sigma_1^- \cup \sigma_2^-) \rangle (\neg q \wedge r)$. In this paper we assume that formulas and programs are represented in NCNF and write $\bar{\varphi}$ to denote the NCNF of $\neg\varphi$.

The *alphabet* $\Sigma(\alpha)$ of a program α and the *regular language* $\mathcal{L}(\alpha)$ generated by α are specified as follows:³

$$\begin{array}{ll} \Sigma(\sigma) = \Sigma & \mathcal{L}(\sigma) = \{\sigma\} \\ \Sigma(\varphi?) = \{\varphi?\} & \mathcal{L}(\varphi?) = \{\varphi?\} \\ \Sigma(\beta; \gamma) = \Sigma(\beta) \cup \Sigma(\gamma) & \mathcal{L}(\beta; \gamma) = \mathcal{L}(\beta) \cdot \mathcal{L}(\gamma) \\ \Sigma(\beta \cup \gamma) = \Sigma(\beta) \cup \Sigma(\gamma) & \mathcal{L}(\beta \cup \gamma) = \mathcal{L}(\beta) \cup \mathcal{L}(\gamma) \\ \Sigma(\beta^*) = \Sigma(\beta) & \mathcal{L}(\beta^*) = (\mathcal{L}(\beta))^* \end{array}$$

where for sets of words M and N , $M.N = \{\alpha\beta \mid \alpha \in M, \beta \in N\}$, $M^0 = \{\varepsilon\}$ (where ε denotes the empty word), $M^{n+1} = M.M^n$ for $n \geq 0$, and $M^* = \bigcup_{n \geq 0} M^n$.

We will use letters like ω to denote either a simple program from Σ or a test (of the form $\varphi?$). A word $\omega_1 \dots \omega_k \in \mathcal{L}(\alpha)$ can be treated as the program $(\omega_1; \dots; \omega_k)$, especially when it is interpreted in a Kripke model. As a finite automaton A over alphabet $\Sigma(\alpha)$ corresponds to a program (the regular expression recognizing the same language), it is interpreted in a Kripke model as follows:

$$A^M = \bigcup \{\gamma^M \mid \gamma \in \mathcal{L}(A)\}. \quad (1)$$

3 A Tableau Calculus for CPDL_{reg}

From now on, let S be a symmetric regular semi-Thue system over Σ , \mathbf{A} be the mapping specifying the finite automata of S , and L be the CPDL_{reg} logic corresponding to S . In this section we present a tableau calculus for checking L -satisfiability.

For each program α , let \mathbb{A}_α be a finite automaton recognizing the regular language $\mathcal{L}(\alpha)$. For each program $\alpha \notin \Sigma$, let \mathbf{A}_α be a finite automaton recognizing the language $\mathcal{L}(\alpha')$, where α' is obtained from α by substituting each $\sigma \in \Sigma$ not inside any test by a regular expression representing $\mathcal{L}(\mathbf{A}_\sigma)$.

The automaton \mathbb{A}_α can be constructed from α in polynomial time, and \mathbf{A}_α can be constructed in polynomial time in the length of α and the sizes of the automata $(\mathbf{A}_\sigma)_{\sigma \in \Sigma}$. Roughly speaking, \mathbf{A}_α can be obtained from \mathbb{A}_α by simultaneously substituting each transition (q_1, σ, q_2) by the automaton \mathbf{A}_σ .

From now on, let X and Γ be finite sets of formulas in NCNF of the base language. For the tableau calculus defined here for checking L -satisfiability of X w.r.t. the set Γ of global assumptions we extend the base language with the auxiliary modal operators \Box_σ , $[A, q]$ and $\langle A, q \rangle$, where $\sigma \in \Sigma$, A is either \mathbf{A}_α or \mathbb{A}_α for some program α occurring in X or Γ in the form $[\alpha]\varphi$ or $\langle \alpha \rangle \varphi$, and q is a state of A . Here, $[A, q]$ and $\langle A, q \rangle$ stand respectively for $[(A, q)]$

³ Note that $\Sigma(\alpha)$ contains not only simple programs but also expressions of the form $(\varphi?)$, and a program α is a regular expression over its alphabet $\Sigma(\alpha)$.

and $\langle(A, q)\rangle$, where (A, q) is the automaton that differs from A only in that q is its only initial state. We call $[A, q]$ (respectively, $\langle A, q \rangle$) a *universal* (respectively, *existential*) *automaton-modal operator*.

In the *extended language*, if φ is a formula, then $\Box_\sigma \varphi$, $[A, q]\varphi$ and $\langle A, q \rangle \varphi$ are also formulas. A formula $\Box_\sigma \varphi$ has the same semantics as $[\sigma]\varphi$, i.e. $(\Box_\sigma \varphi)^M = ([\sigma]\varphi)^M$. The semantics of formulas $[A, q]\varphi$ and $\langle A, q \rangle \varphi$ are defined as usual, treating (A, q) as a program with semantics specified by (1).

Despite that $\Box_\sigma \varphi$ has the same semantics as $[\sigma]\varphi$, the operator \Box_σ behaves differently from $[\sigma]$ in our calculus. Given a Kripke model M and a state $w \in \Delta^M$, we have that $w \in ([A, q]\varphi)^M$ (respectively, $w \in (\langle A, q \rangle \varphi)^M$) iff

$w_k \in \varphi^M$ for all (respectively, some) $w_k \in \Delta^M$ such that there exist a word $\omega_1 \dots \omega_k$ (with $k \geq 0$) accepted by (A, q) with $(w, w_k) \in (\omega_1; \dots; \omega_k)^M$.

The condition $(w, w_k) \in (\omega_1; \dots; \omega_k)^M$ means there exist states $w_0 = w, w_1, \dots, w_{k-1}$ of M such that, for each $1 \leq i \leq k$, if $\omega_i \in \Sigma$ then $(w_{i-1}, w_i) \in \omega_i^M$, else $\omega_i = (\psi_i?)$ for some ψ_i and $w_{i-1} = w_i$ and $w_i \in \psi_i^M$. Clearly, $\langle A, q \rangle$ is dual to $[A, q]$ in the sense that $\langle A, q \rangle \varphi \equiv \neg[A, q]\neg\varphi$ for any formula φ .

We will use the following convention:

- given a finite automaton A , we always assume that $A = \langle \Sigma_A, Q_A, I_A, \delta_A, F_A \rangle$
- for $q \in Q_A$, we define $\delta_A(q) = \{(\omega, q') \mid (q, \omega, q') \in \delta_A\}$.

Lemma 3.1. *Let M be a Kripke model, α be a program, φ be a formula, and A be a finite automaton over $\Sigma(\alpha)$. Then:*

1. if $I_A = \{q_1, \dots, q_k\}$ then $A^M = (A, q_1)^M \cup \dots \cup (A, q_k)^M$
2. $\alpha^M = \mathbb{A}_\alpha^M$
3. if $I_{\mathbb{A}_\alpha} = \{q_1, \dots, q_k\}$ then $(\langle \alpha \rangle \varphi)^M = (\langle \mathbb{A}_\alpha, q_1 \rangle \varphi \vee \dots \vee \langle \mathbb{A}_\alpha, q_k \rangle \varphi)^M$
4. if M is an L -model then
 - (a) $\mathbb{A}_\alpha^M = \mathbf{A}_\alpha^M$
 - (b) if $I_{\mathbf{A}_\alpha} = \{q_1, \dots, q_k\}$ then $([\alpha]\varphi)^M = ([\mathbf{A}_\alpha, q_1]\varphi \wedge \dots \wedge [\mathbf{A}_\alpha, q_k]\varphi)^M$.

Proof. The assertions 1 and 2 clearly hold. The assertion 3 follows from the assertions 1 and 2. For the assertion 4a, just note that M is an L -model and, for every $\sigma \in \Sigma$, \mathbf{A}_σ accepts σ . The assertion 4b follows from the assertions 1, 2, and 4a. \triangleleft

In what follows we define tableaux as rooted “and-or” graphs. Such a graph is a tuple $G = (V, E, \nu)$, where V is a set of nodes, $E \subseteq V \times V$ is a set of edges, $\nu \in V$ is the root, and each node $v \in V$ has a number of attributes. If there is an edge $(v, w) \in E$ then we call v a *predecessor* of w , and call w a *successor* of v . The set of all attributes of v is called the *contents* of v . Attributes of tableau nodes are:

- $Type(v) \in \{\text{state}, \text{non-state}\}$. If $Type(v) = \text{state}$ then we call v a *state*, else we call v a *non-state* (or an *internal* node). A state is never directly connected to a state.
- $Status(v) \in \{\text{unexpanded}, \text{expanded}, \text{incomplete}, \text{unsat}, \text{sat}\}$.
- $Label(v)$ is a finite set of formulas, called the label of v .
- $RFmls(v)$ is a finite set of formulas, called the set of reduced formulas of v .
- $DFmls(v)$ is a finite set of formulas, called the set of disallowed formulas of v .
- $StatePred(v) \in V \cup \{\text{null}\}$ is called the state-predecessor of v . It is available only when $Type(v) = \text{non-state}$. If v is a non-state and G has no paths connecting a state to v then $StatePred(v) = \text{null}$. Otherwise, G has exactly one state u that is connected to v via a path not containing any other states. In that case, $StatePred(v) = u$.

- $CELabel(v)$ is a formula of the form $\langle\sigma\rangle\varphi$. It is called the coming edge label of v and is available only when v is a successor of a state. Informally, if $CELabel(v) = \langle\sigma\rangle\varphi$ and u is the predecessor of v then $\langle\sigma\rangle\varphi \in Label(u)$ and this formula is realized at u by creating a transition to v (transitions are done only for states).
- $ATPred(v) \in V$ is called the after-transition-predecessor of v . It is available only when $Type(v) = \text{non-state}$. If v is a non-state and $v_0 = StatePred(v) \neq \text{null}$ then there is exactly one successor v_1 of v_0 such that every path connecting v_0 to v must go through v_1 , and we have that $ATPred(v) = v_1$. If v is a non-state and $StatePred(v) = \text{null}$ then $ATPred(v)$ is set to the root ν .
- $FmlSC(v)$ is a formula called the formula suggested by converse. It is available only when $Type(v) = \text{state}$ and $Status(v) = \text{incomplete}$. In that case, it means that some node w with $StatePred(w) = v$ wants $\varphi \in Label(v) \cup RFmls(v)$ but it does not hold. The formula φ is expected to be present at v when, for $v_1 = ATPred(w)$, $CELabel(v_1)$ is of the form $\langle\sigma\rangle\psi$ and $\Box_{\sigma-}\varphi \in Label(w)$.

We define

$$\begin{aligned}
AFmls(v) &= Label(v) \cup RFmls(v) \\
NDFmls(v) &= \{\bar{\varphi} \mid \varphi \in DFmls(v)\} \\
FullLabel(v) &= AFmls(v) \cup NDFmls(v) \\
Kind(v) &= \begin{cases} \text{and-node} & \text{if } Type(v) = \text{state} \\ \text{or-node} & \text{if } Type(v) = \text{non-state} \end{cases} \\
BeforeFormingState(v) &= v \text{ has a successor which is a state} \\
AfterTrans(v) &= (ATPred(v) = v)
\end{aligned}$$

$AFmls(v)$ is called the available formulas of v . In an “and-or” graph, states play the role of “and”-nodes, while non-states play the role of “or”-nodes.⁴

By the *local graph* of a state v we mean the subgraph of G consisting of all the paths starting from v and not containing any other states. Similarly, by the local graph of a non-state v we mean the subgraph of G consisting of all the path starting from v and not containing any states.

We apply global state caching in the sense that if v_1 and v_2 are different states then $Label(v_1) \neq Label(v_2)$ or $RFmls(v_1) \neq RFmls(v_2)$ or $DFmls(v_1) \neq DFmls(v_2)$. If v is a non-state such that $AfterTrans(v)$ then we also apply global caching for the local graph of v . That is, if w_1 and w_2 are different nodes of the local graph of v then $Label(w_1) \neq Label(w_2)$ or $RFmls(w_1) \neq RFmls(w_2)$ or $DFmls(w_1) \neq DFmls(w_2)$.

Our calculus CL for the $CPDL_{reg}$ logic L will be specified, amongst others, by a finite set of tableau rules, which are used to expand nodes of tableaux. A *tableau rule* is specified with the following information:

- the kind of the rule: an “and”-rule or an “or”-rule
- the conditions for applicability of the rule (if any)
- the priority of the rule
- the number of successors of a node resulting from applying the rule to it, and the way to compute their contents.

Tableau rules are usually written downwards, with a set of formulas above the line as the *premise*, which represents the label of the node to which the rule is applied, and a number of sets of formulas below the line as the (*possible*) *conclusions*, which represent the labels of the successor nodes resulting from the application of the rule. Possible conclusions of an “or”-rule are separated by $|$, while conclusions of an “and”-rule are separated by $\&$. If a rule is a unary rule (i.e. a rule with only one possible conclusion) or an “and”-rule then its conclusions are

⁴ But this is not necessarily true for (“and-or” graphs in) other logics.

“firm” and we ignore the word “possible”. The meaning of an “or”-rule is that if the premise is L -satisfiable w.r.t. Γ then some of the possible conclusions are also L -satisfiable w.r.t. Γ , while the meaning of an “and”-rule is that if the premise is L -satisfiable w.r.t. Γ then all of the conclusions are also L -satisfiable w.r.t. Γ (possibly in different states of the model under construction).

Such a representation gives only a part of the specification of the rules.

We use Y to denote a set of formulas, write Y, φ to denote $Y \cup \{\varphi\}$ and write Y, Γ to denote $Y \cup \Gamma$. Our *tableau calculus* \mathcal{CL} for the CPDL_{reg} logic L w.r.t. the set Γ of global assumptions consists of the rules which are partially specified in Table 1 together with two special rules (*forming-state*) and (*conv*), which will be explained later.

For any rule of \mathcal{CL} except (*forming-state*) and (*conv*), the distinguished formulas of the premise are called the *principal formulas* of the rule. The rules (*forming-state*) and (*conv*) have no principal formulas.

As usual, we assume that, for each rule of \mathcal{CL} described in Table 1, the principal formulas are not members of the set Y which appears in the premise of the rule.

The rule (*trans*) is the only “and”-rule and the only *transitional rule*. Instantiating this rule, for example, to the set $\{\langle\sigma\rangle p, \langle\sigma\rangle q, \Box_\sigma r\}$ as the premise and $\Gamma = \{s\}$ we get two conclusions: $\{p, r, s\}$ and $\{q, r, s\}$. Expanding a state v in a tableau by the rule (*trans*), each successor w_i of v is created due to a corresponding principal formula $\langle\sigma_i\rangle\varphi_i$ of the rule and we have $CELabel(w_i) = \langle\sigma_i\rangle\varphi_i$.

The other rules of \mathcal{CL} are “or”-rules, which are also called *static rules*. The intuition behind distinguishing between static/transitional is that static rules do not change the state of the model under construction, while each conclusion of the transitional rule forces a move to a new state. The transitional rule is used to expand states of tableaux, while the static rules are used to expand non-states of tableaux.

For any state w , every predecessor v of w is always a non-state. Such a node v is expanded and connected to w by the static rule (*forming-state*). The nodes v and w correspond to the same state of the Kripke model under construction. In other words, the rule (*forming-state*) “transforms” a non-state to a state. The idea is to separate internal nodes (i.e. non-states) from states, which are globally cached. The rule (*forming-state*) guarantees that, if **BeforeFormingState**(v) holds then v has exactly one successor, which is a state.

Expanding a non-state v of a tableau by a static rule $\rho \in \{(\wedge), (\vee), (aut_\Box), (aut_\Diamond), ([A]), ([A]_f), (\Box_\sigma?)\}$ which uses φ as the principal formula we put φ into the set $RFmls(w)$ of each successor w of v by setting $RFmls(w) := RFmls(v) \cup \{\varphi\}$. We use $RFmls(w)$ to disallow expanding w by static rules which use a formula from $RFmls(w)$ as the principal formula (i.e. to block reducing the formulas from $RFmls(w)$ twice). If a non-state v is expanded by a static rule $\rho \in \{(\langle A \rangle), (\langle A \rangle_f), (\langle \Diamond \rangle), (conv)\}$ and w is a successor of v then we set $RFmls(w) := RFmls(v)$. Thus, we do not use the attribute $RFmls$ to disallow the rules $(\langle A \rangle), (\langle A \rangle_f), (\langle \Diamond \rangle)$ (in order to be able to fulfill eventualities of the form $\langle A, q \rangle \varphi$). If v is expanded by the rule (*trans*) and w is a successor of v then we set $RFmls(w) := \emptyset$.

Let v_0, v_1, \dots, v_k be a path of a tableau such that $k \geq 1$, $Type(v_0) = \text{state}$ and $Type(v_i) = \text{non-state}$ for $1 \leq i \leq k$. Suppose that $CELabel(v_1) = \langle\sigma\rangle\psi$ and $\Box_{\sigma-\varphi} \in Label(v_k)$. If v_0 corresponds to a state x of a Kripke model M , then all v_1, \dots, v_k correspond to a state y of M such that $(x, y) \in \sigma^M$. The formulas from $Label(v_k)$ are supposed to be satisfied at y in M , which causes φ satisfied at x in M . So, φ is expected to belong to $AFmls(v_0)$ (i.e. we should realize φ at v_0). What should be done in the case $\varphi \notin AFmls(v_0)$? We will not simply add φ to $Label(v_0)$, as v_k is only one of possibly many “or”-descendants of v_0 , and adding φ to $Label(v_0)$ may affect the other “or”-descendants of v_0 (which is not allowed). If $\varphi \in DFmls(v_0)$, which means φ is disallowed in v_0 , then $Status(v_k)$ becomes **unsat**, which intuitively means that the “combination” of v_0 and v_k is L -unsatisfiable w.r.t. Γ . In the other case, $Status(v_0)$ becomes **incomplete**, the predecessors of v_0 will be re-expanded by the rule (*conv*) either to have φ (by

$(\wedge) \frac{Y, \varphi \wedge \psi}{Y, \varphi, \psi}$	$(\vee) \frac{Y, \varphi \vee \psi}{Y, \varphi \mid Y, \psi}$
$(aut_{\square}) \frac{Y, [\alpha]\varphi}{Y, [\mathbf{A}_{\alpha}, q_1]\varphi, \dots, [\mathbf{A}_{\alpha}, q_k]\varphi}$ if $I_{\mathbf{A}_{\alpha}} = \{q_1, \dots, q_k\}$	
$(aut_{\diamond}) \frac{Y, \langle \alpha \rangle \varphi}{Y, \langle \mathbf{A}_{\alpha}, q_1 \rangle \varphi \mid \dots \mid Y, \langle \mathbf{A}_{\alpha}, q_k \rangle \varphi}$ if $\begin{cases} \alpha \notin \Sigma, \alpha \text{ is not a test,} \\ \text{and } I_{\mathbf{A}_{\alpha}} = \{q_1, \dots, q_k\} \end{cases}$	
if $\delta_A(q) = \{(\omega_1, q_1), \dots, (\omega_k, q_k)\}$ and $q \notin F_A$: $([A]) \frac{Y, [A, q]\varphi}{Y, \square_{\omega_1}[A, q_1]\varphi, \dots, \square_{\omega_k}[A, q_k]\varphi}$ $(\langle A \rangle) \frac{Y, \langle A, q \rangle \varphi}{Y, \langle \omega_1 \rangle \langle A, q_1 \rangle \varphi \mid \dots \mid Y, \langle \omega_k \rangle \langle A, q_k \rangle \varphi}$	
if $\delta_A(q) = \{(\omega_1, q_1), \dots, (\omega_k, q_k)\}$ and $q \in F_A$: $([A]_f) \frac{Y, [A, q]\varphi}{Y, \square_{\omega_1}[A, q_1]\varphi, \dots, \square_{\omega_k}[A, q_k]\varphi, \varphi}$ $(\langle A \rangle_f) \frac{Y, \langle A, q \rangle \varphi}{Y, \langle \omega_1 \rangle \langle A, q_1 \rangle \varphi \mid \dots \mid Y, \langle \omega_k \rangle \langle A, q_k \rangle \varphi \mid Y, \varphi}$	
$(\square?) \frac{Y, \square_{(\psi?)}\varphi}{Y, \overline{\psi} \mid Y, \varphi}$	$(\diamond?) \frac{Y, \langle \psi? \rangle \varphi}{Y, \psi, \varphi}$
$(trans) \frac{Y, \langle \sigma_1 \rangle \varphi_1, \dots, \langle \sigma_k \rangle \varphi_k}{Y_1, \varphi_1, \Gamma \ \& \ \dots \ \& \ Y_k, \varphi_k, \Gamma}$ where $\begin{cases} k \geq 1, Y \text{ contains no formulas of the form } \langle \sigma \rangle \varphi, \\ \text{and } Y_i = \{\psi : \square_{\sigma_i} \psi \in Y\} \text{ for every } 1 \leq i \leq k \end{cases}$	

Table 1. Some rules of the tableau calculus CL for a $CPDL_{reg}$ logic L .

adding φ to the attribute *Label*) or to disallow φ (by adding φ to the attribute *DFmls*). For details, see Steps 3-6 of procedure **Apply** given on page 10 (where w plays the role of v_0).

The priorities of the tableau rules are as follows (the bigger, the stronger): unary static rules except (*forming-state*): 5; non-unary static rules: 4; (*forming-state*): 3; (*trans*): 2; (*conv*): 1.⁵

The conditions for applying a rule $\rho \neq (conv)$ to a node v are as follows:

- the rule has $Label(v)$ as the premise
- all the conditions accompanying with ρ in Table 1 are satisfied
- if $\rho = (trans)$ then $Type(v) = \text{state}$
- if $\rho \neq (trans)$ then $Type(v) = \text{non-state}$ and
 - if $\rho \in \{(\wedge), (\vee), (aut_{\square}), (aut_{\diamond}), ([A]), ([A]_f), (\square?)\}$ then the principal formula of ρ does not belong to $RFmls(v)$
 - no static rule with a higher priority is applicable to v .

Application of a tableau rule ρ to a node v is specified by procedure **Apply**(ρ, v) given on page 10. Auxiliary functions are defined on page 9. Procedures used for updating and propagating statuses of nodes are defined on page 11. The main function **Tableau**(X, Γ) is also defined on page 11. It returns a rooted “and-or” graph called a *CL-tableau* for (X, Γ) .

⁵ The rule (*conv*) is not chosen like the others but only invoked at another part of the algorithm (namely Procedure **UpdateStatus**).

Function NewSucc($v, type, ceLabel, label, rFmls, dFmls$)**Global data:** a rooted graph (V, E, ν) .**Purpose:** create a new successor for v .

```

1 create a new node  $w$ ,  $V := V \cup \{w\}$ , if  $v \neq \text{null}$  then  $E := E \cup \{(v, w)\}$ ;
2  $Type(w) := type$ ,  $Status(w) := \text{unexpanded}$ ;
3  $Label(w) := label$ ,  $RFmls(w) := rFmls$ ,  $DFmls(w) := dFmls$ ;
4 if  $type = \text{non-state}$  then
5   if  $v = \text{null}$  or  $Type(v) = \text{state}$  then
6      $StatePred(w) := v$ ,  $ATPred(w) := w$ ,  $CELabel(w) := ceLabel$ 
7   else  $StatePred(w) := StatePred(v)$ ,  $ATPred(w) := ATPred(v)$ 
8 return  $w$ 

```

Function FindProxy($type, root, label, rFmls, dFmls$)**Global data:** a rooted graph (V, E, ν) .

```

1 if  $type = \text{state}$  then  $W := V$  else  $W :=$  the nodes of the local graph of  $root$ ;
2 if there exists  $v \in W$  such that  $Type(v) = type$  and  $Label(v) = label$  and  $RFmls(v) = rFmls$  and  $DFmls(v) = dFmls$  then return  $v$ 
3 else return null

```

Function ConToSucc($v, type, ceLabel, label, rFmls, dFmls$)**Global data:** a rooted graph (V, E, ν) .**Purpose:** connect v to a successor, which is created if necessary.

```

1 if  $type = \text{state}$  then  $root := \text{null}$  else  $root := ATPred(v)$ 
2  $w := \text{FindProxy}(type, root, label, rFmls, dFmls)$ ;
3 if  $w \neq \text{null}$  then  $E := E \cup \{(v, w)\}$ 
4 else  $w := \text{NewSucc}(v, type, ceLabel, label, rFmls, dFmls)$ ;
5 return  $w$ 

```

Function TUnsat(v)

```

1 return  $\perp \in Label(v)$  or there exists  $\{\varphi, \overline{\varphi}\} \subseteq Label(v)$ 

```

Function TSat(v)

```

1 return no rule except (conv) is applicable to  $v$ 

```

Function ToExpand**Global data:** a rooted graph (V, E, ν) .

```

1 if there exists  $v \in V$  with  $Status(v) = \text{unexpanded}$  then return /* any such */  $v$ 
2 else return null; // various ‘search strategies’ can be applied here

```

Example 3.2. Consider the regular grammar logic with converse L that corresponds to the following semi-Thue system over alphabet $\{\sigma, \varrho, \sigma^-, \varrho^-\}$:

$$\{\varrho \rightarrow \sigma^- \varrho, \varrho \rightarrow \sigma, \varrho^- \rightarrow \varrho^- \sigma, \varrho^- \rightarrow \sigma^-\}.$$

The set of words derivable from ϱ is characterized by $(\sigma^-)^*(\sigma + \varrho)$. Let

$$\mathbf{A}_\varrho = \langle \{\sigma, \varrho, \sigma^-, \varrho^-\}, \{0, 1\}, \{0\}, \{(0, \sigma^-, 0), (0, \sigma, 1), (0, \varrho, 1)\}, \{1\} \rangle.$$

In Figures 1 and 2 we give an “and-or” graph for $(\langle \langle \sigma \rangle (p \wedge [\varrho] \neg p) \rangle, \emptyset)$ w.r.t. CL . The nodes are numbered when created and are expanded using DFS (depth-first search). At the end the root receives status *unsat*. Therefore, by Theorem 3.4, $\langle \sigma \rangle (p \wedge [\varrho] \neg p)$ is L -unsatisfiable. \triangleleft

Observe that:

- An application of the rule (*conv*) to a node v may cause a sequence of other applications of this rule to “ancestor nodes” of v and may put formulas far back of the tableau.

Procedure $\text{Apply}(\rho, v)$ **Global data:** a rooted graph (V, E, ν) .**Input:** a rule ρ and a node $v \in V$ s.t. if $\rho \neq (\text{conv})$ then $\text{Status}(v) = \text{unexpanded}$ else $\text{Status}(v) = \text{expanded}$ and $\text{BeforeFormingState}(v)$.**Purpose:** applying the tableau rule ρ to the node v .

```

1 if  $\rho = (\text{forming-state})$  then
2    $\text{ConToSucc}(v, \text{state}, \text{null}, \text{Label}(v), \text{RFmls}(v), \text{DFmls}(v));$ 
3 else if  $\rho = (\text{conv})$  then
4   let  $w$  be the only successor of  $v$ ,  $E := E \setminus \{(v, w)\}$ ,  $\varphi := \text{FmlSC}(w);$ 
5    $\text{ConToSucc}(v, \text{non-state}, \text{null}, \text{Label}(v) \cup \{\varphi\}, \text{RFmls}(v), \text{DFmls}(v));$ 
6    $\text{ConToSucc}(v, \text{non-state}, \text{null}, \text{Label}(v), \text{RFmls}(v), \text{DFmls}(v) \cup \{\varphi\});$ 
7 else if  $\rho = (\text{trans})$  then
8   let  $Y_1, \dots, Y_k$  be the possible conclusions of the rule;
9   let  $\psi_1, \dots, \psi_k$  be the corresponding principal formulas;
10  foreach  $1 \leq i \leq k$  do  $\text{NewSucc}(v, \text{non-state}, \psi_i, Y_i, \emptyset, \emptyset)$ 
11 else
12  let  $Y_1, \dots, Y_k$  be the possible conclusions of the rule;
13  if  $\rho \in \{(\langle A \rangle), (\langle A \rangle_f), (\diamond ?)\}$  then  $Z := \text{RFmls}(v)$ 
14  else  $Z := \text{RFmls}(v) \cup \{\text{the principal formula of } \rho\};$ 
15  foreach  $1 \leq i \leq k$  do  $\text{ConToSucc}(v, \text{non-state}, \text{null}, Y_i, Z, \text{DFmls}(v))$ 
16 foreach successor  $w$  of  $v$  with  $\text{Status}(w) \notin \{\text{incomplete}, \text{unsat}, \text{sat}\}$  do
17   if  $\text{TUnsat}(w)$  then  $\text{Status}(w) := \text{unsat}$  else
18     if  $\text{Type}(w) = \text{non-state}$  then
19        $u_0 := \text{StatePred}(w)$ ,  $u_1 := \text{ATPred}(w);$ 
20       if there exist  $\Box_\sigma - \varphi \in \text{Label}(w)$ ,  $\text{CELabel}(u_1) = \langle \sigma \rangle \psi$ ,  $\varphi \notin \text{AFmls}(u_0)$  then
21         if  $\varphi \in \text{DFmls}(u_0)$  then  $\text{Status}(w) := \text{unsat}$ 
22         else
23            $\text{Status}(u_0) := \text{incomplete}$ ,  $\text{FmlSC}(u_0) := \varphi;$ 
24            $\text{PropagateStatus}(u_0)$ , return
25   if  $\text{Status}(w) \neq \text{unsat}$  and  $\text{TSat}(w)$  then  $\text{Status}(w) := \text{sat}$ 
26  $\text{Status}(v) := \text{expanded}$ ,  $\text{UpdateStatus}(v);$ 
27 if  $\text{Status}(v) \in \{\text{incomplete}, \text{sat}, \text{unsat}\}$  then  $\text{PropagateStatus}(v)$ 

```

- If the logic L is essentially a REG^c logic, then no formulas of the form $\langle A, q \rangle \varphi$ occur in tableaux (and we do not have to check “global consistency”).

Define the *length* of a formula φ to be the number of symbols occurring in φ . For example, the length of $\langle \mathbf{A}_\sigma, q \rangle \psi$ is the length of ψ plus 5, treating \mathbf{A}_σ as a symbol. Define the *size* of a finite set of formulas to be the length of the conjunction of its formulas. Define the *size* of a finite automaton $\langle \Sigma, Q, I, \delta, F \rangle$ to be $|Q| + |I| + |\delta| + |F|$.

For a set Y of formulas, the set of *basic subformulas* of Y , denoted by $\text{bsf}(Y)$, consists of all formulas φ and $\bar{\varphi}$ of the base language such that either $\varphi \in Y$ or φ is a subformula of some formula of Y . The set $\text{closure}_L(Y)$ is defined to be the union of $\text{bsf}(Y)$ and the following two sets:

- $\{[\mathbf{A}_\alpha, q]\varphi, \Box_\omega[\mathbf{A}_\alpha, q]\varphi \mid [\alpha]\varphi \in \text{bsf}(Y), q \in Q_{\mathbf{A}_\alpha} \text{ and } \omega \in \Sigma_{\mathbf{A}_\alpha}\}$
- $\{\langle \mathbf{A}_\alpha, q \rangle \varphi, \langle \omega \rangle \langle \mathbf{A}_\alpha, q \rangle \varphi \mid \langle \alpha \rangle \varphi \in \text{bsf}(Y), \alpha \notin \Sigma, \alpha \text{ is not a test}, q \in Q_{\mathbf{A}_\alpha} \text{ and } \omega \in \Sigma_{\mathbf{A}_\alpha}\}$.

Lemma 3.3. *Let $h = |\Sigma|$ and let k be the sum of the sizes of the automata \mathbf{A}_σ (for $\sigma \in \Sigma$), l be the size of $X \cup \Gamma$, and n be the size of $\text{closure}_L(X \cup \Gamma)$. Let $G = (V, E, \nu)$ be a CL -tableau for (X, Γ) . Then n is polynomial in $k.h.l$ and, for every $v \in V$:*

1. The sets $\text{Label}(v)$, $\text{RFmls}(v)$, $\text{DFmls}(v)$ and $\text{NDFmls}(v)$ contain only formulas from $\text{closure}_L(X \cup \Gamma)$.
2. $\text{RFmls}(v)$ does not contain formulas of the form $\langle A, q \rangle \varphi$ or $\langle \psi ? \rangle \varphi$.

Function Tableau(X, Γ)**Input:** finite sets X and Γ of concepts in NCNF of the base language.**Global data:** a rooted graph (V, E, ν) .

```

1  $\nu := \text{NewSucc}(\text{null}, \text{non-state}, \text{null}, X \cup \Gamma, \emptyset, \emptyset)$ ;
2 if TUnsat( $\nu$ ) then Status( $\nu$ ) := unsat
3 else if TSat( $\nu$ ) then Status( $\nu$ ) := sat;
4 while ( $v := \text{ToExpand}()$ )  $\neq \text{null}$  do
5   choose a tableau rule  $\rho$  different from (conv) and applicable to  $v$ ;
6   Apply( $\rho, v$ ); // defined on page 10
7   foreach  $w \in V$  such that Status( $w$ ) = incomplete do
8     delete the local graph of  $w$  except the node  $w$ 
9 return  $(V, E, \nu)$ 

```

Procedure UpdateStatus(v)**Global data:** a rooted graph (V, E, ν) .**Input:** a node $v \in V$ with Status(v) = expanded.

```

1 if Kind( $v$ ) = or-node then
2   if some successors of  $v$  have status sat then Status( $v$ ) := sat
3   else if all successors of  $v$  have status unsat then Status( $v$ ) := unsat
4   else if a successor of  $v$  has status incomplete then Apply((conv),  $v$ )
5 else // Kind( $v$ ) = and-node
6   if all successors of  $v$  have status sat then Status( $v$ ) := sat
7   else if some successors of  $v$  have status unsat then Status( $v$ ) := unsat

```

Procedure PropagateStatus(v)**Global data:** a rooted graph (V, E, ν) .**Input:** a node $v \in V$ with Status(v) $\in \{\text{incomplete}, \text{unsat}, \text{sat}\}$.

```

1 foreach predecessor  $u$  of  $v$  with Status( $u$ ) = expanded do
2   UpdateStatus( $u$ );
3   if Status( $u$ )  $\in \{\text{incomplete}, \text{unsat}, \text{sat}\}$  then PropagateStatus( $u$ )

```

3. If v is a state then $\text{Label}(v) \cap \text{RFmls}(v) = \emptyset$ and $\text{Label}(v)$ does not contain formulas of the form $\varphi \wedge \psi$, $\varphi \vee \psi$, $[\alpha]\varphi$, $[A, q]\varphi$, $\Box_{(\psi?)}\varphi$, $\langle A, q \rangle \varphi$ or $\langle \beta \rangle \varphi$ with $\beta \notin \Sigma$.
4. (a) $\text{Label}(v)$ is L -equivalent to $\text{Label}(v) \cup \text{RFmls}(v)$
(b) $\text{Label}(v) \setminus \text{RFmls}(v)$ is L -equivalent to $\text{Label}(v) \cup \text{RFmls}(v)$.

Furthermore, the graph G has no more than $2^{O(n)}$ nodes and can be constructed in $2^{O(n)}$ steps.

Proof. Clearly, n is polynomial in $k.h.l$. The assertions 1-3 should be clear. The assertion 4 can be proved by induction in a straightforward way. Since global state caching is used, by assertion 1, G has no more than $2^{O(n)}$ states. Similarly, since global caching is used for the local graphs of non-states, the local graph of each non-state has no more than $2^{O(n)}$ nodes. Hence, G has no more than $2^{O(n)}$ nodes. Each node of the graph may be re-expanded at most once, using the rule (*conv*). Expansion of a node can be done in polynomial time in the size of the graph. Hence the graph can be constructed in $2^{O(n)}$ steps. \triangleleft

A *marking* of a CL -tableau G is a subgraph G_m of G such that:

- the root of G is the root of G_m
- if v is a node of G_m and is an “or”-node of G then at least one edge (v, w) of G is an edge of G_m
- if v is a node of G_m and is an “and”-node of G then every edge (v, w) of G is an edge of G_m
- if (v, w) is an edge of G_m then v and w are nodes of G_m .

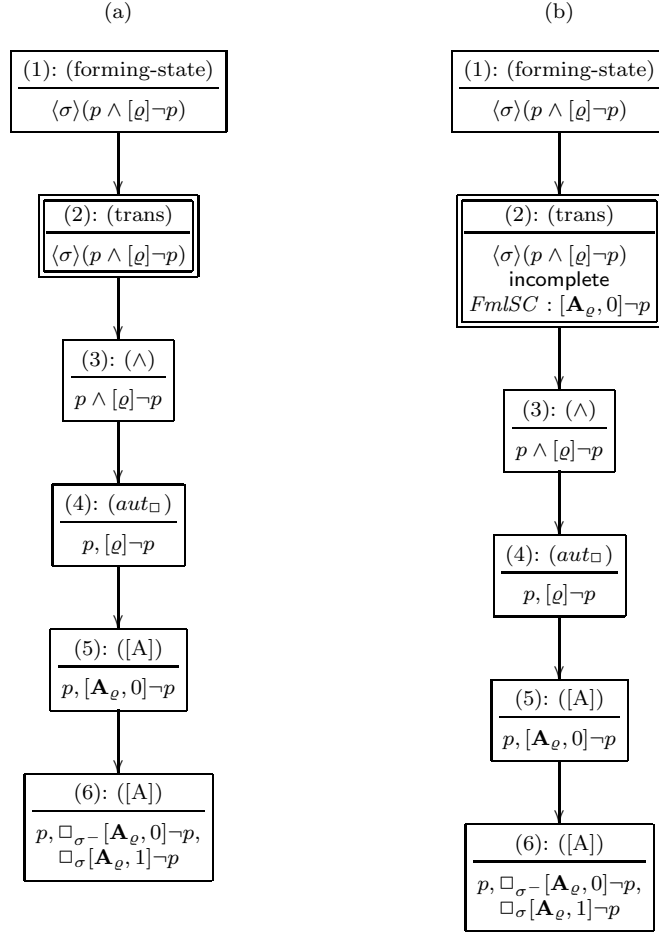


Fig. 1. An illustration for Example 3.2: part I. The graph (a) is the “and-or” graph constructed until checking “compatibility” of the node (6) w.r.t. to the node (1). In each node, we display the name of the rule expanding the node and the formulas of the label of the node. The attribute $DFmls$ of each of the displayed nodes is an empty set. The node (2) is the only state. As an example, we have $StatePred((6)) = (2)$, $ATPred((6)) = (3)$ and $CELabel((3)) = \langle \sigma \rangle (p \wedge [\varrho] \neg p)$. Since $\square_{\sigma} - [\mathbf{A}_{\varrho}, 0] \neg p \in Label((6))$, $Status((2))$ is set to *incomplete* and $FmlSC((2))$ is set to $[\mathbf{A}_{\varrho}, 0] \neg p$. This results in the graph (b). The construction is then continued by applying the rule (*conv*) to (1) and deleting the nodes (3)-(6). See Figure 2 for the continuation.

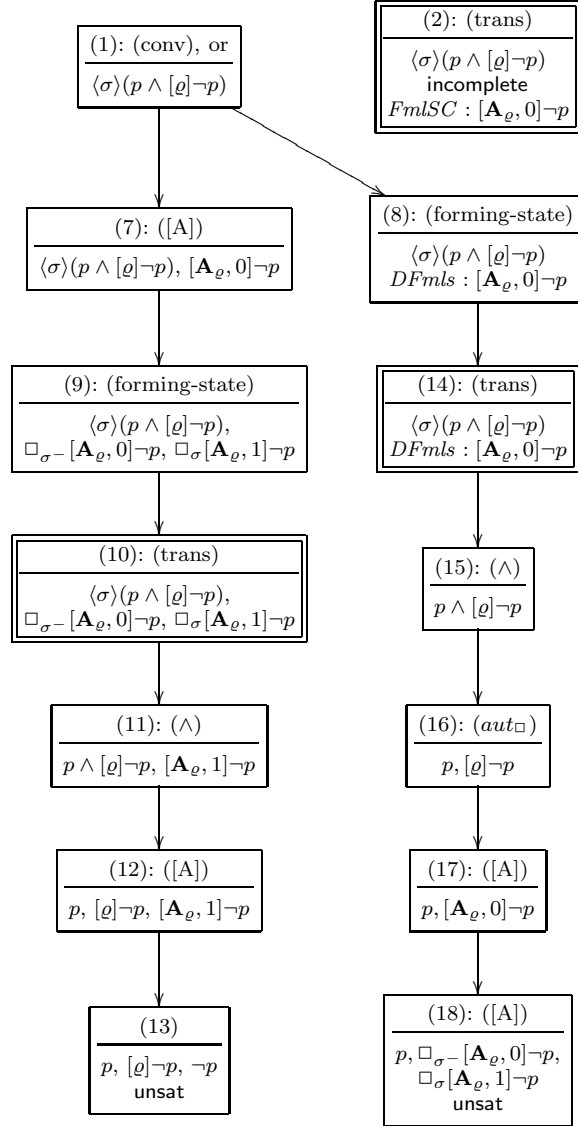


Fig. 2. An illustration for Example 3.2: part II. This is a fully expanded “and-or” graph for $(\{\langle\sigma\rangle(p \wedge [\varrho]\neg p)\}, \emptyset)$ w.r.t. CL . The node (1) is re-expanded by the rule *(conv)*. As in the part I, in each node we display the name of the rule expanding the node and the formulas of the label of the node. We display also the attribute $DFmls$ of the nodes (8) and (9). This attribute of any other node is an empty set. The nodes (2), (10) and (14) are the only states. The node (13) receives status **unsat** because $\{p, \neg p\} \subset Label((13))$. After that the nodes (12)-(7) receive status **unsat** in subsequent steps. The node (18) receives status **unsat** because $[A_\varrho, 0]\neg p \in DFmls((14))$. After that the nodes (17)-(14), (8), (1) receive status **unsat** in subsequent steps.

Let G be a CL -tableau for (X, Γ) , G_m be a marking of G , v be a node of G_m , and $\langle A, q \rangle \varphi$ be a formula of $Label(v)$. A *trace* of $\langle A, q \rangle \varphi$ in G_m starting from v is a sequence $(v_0, \varphi_0), \dots, (v_k, \varphi_k)$ such that:

- $v_0 = v$ and $\varphi_0 = \langle A, q \rangle \varphi$
- for every $1 \leq i \leq k$, (v_{i-1}, v_i) is an edge of G_m
- for every $1 \leq i \leq k$, φ_i is a formula of $Label(v_i)$ such that
 - if φ_{i-1} is not a principal formula of the tableau rule expanding v_{i-1} then the rule must be a static rule and $\varphi_i = \varphi_{i-1}$
 - else if the rule is $(\langle A \rangle)$ or $(\langle A \rangle_f)$ then φ_{i-1} is of the form $\langle A, q' \rangle \varphi$ and φ_i is the formula obtained from φ_{i-1}
 - else if the rule is $(\Diamond?)$ then φ_{i-1} is of the form $\langle \psi? \rangle \langle A, q' \rangle \varphi$ and $\varphi_i = \langle A, q' \rangle \varphi$
 - else the rule is $(trans)$, φ_{i-1} is of the form $\langle \sigma \rangle \langle A, q' \rangle \varphi$ and is the coming edge label of v_i , and $\varphi_i = \langle A, q' \rangle \varphi$.

A trace $(v_0, \varphi_0), \dots, (v_k, \varphi_k)$ of $\langle A, q \rangle \varphi$ in a marking G_m is called a \Diamond -*realization* in G_m for $\langle A, q \rangle \varphi$ at v_0 if $\varphi_k = \varphi$.

A marking G_m of a CL -tableau G is *consistent* if:

local consistency: G_m does not contain nodes with status `unsat`; and

global consistency: for every node v of G_m , every formula $\langle A, q \rangle \varphi$ of $Label(v)$ has a \Diamond -realization (starting from v) in G_m .

Theorem 3.4 (Soundness and Completeness). *Let S be a symmetric regular semi-Thue system over Σ , \mathbf{A} be the mapping specifying the finite automata of S , and L be the $CPDL_{reg}$ logic corresponding to S . Let X and Γ be finite sets of formulas in $NCNF$ of the base language, and G be a CL -tableau for (X, Γ) . Then X is L -satisfiable w.r.t. the set Γ of global assumptions iff G has a consistent marking.*

4 Proofs of Soundness and Completeness

Let G be a CL -tableau for (X, Γ) . For each $v \in V$ with $Status(v) \in \{\text{incomplete}, \text{unsat}, \text{sat}\}$, let $DSTimeStamp(v)$ be the step number at which $Status(v)$ is changed to its final value (i.e. determined to be `incomplete`, `unsat` or `sat`). $DSTimeStamp$ stands for “determined-status timestamp”.

4.1 Soundness

Lemma 4.1. *Let $G = (V, E, \nu)$ be a CL -tableau for (X, Γ) . Then no node with status `incomplete` is reachable from ν .*

Proof. By Steps 4, 25, 26 of procedure `Apply` and Step 4 of procedure `UpdateStatus`. \triangleleft

Lemma 4.2. *If a non-state v has w_1, \dots, w_k as all the successors then, for every L -model M and every $x \in \Delta^M$, we have that $M, x \models FullLabel(v)$ iff there exists $1 \leq i \leq k$ such that $M, x \models FullLabel(w_i)$.* \triangleleft

The proof of this lemma is straightforward.

Lemma 4.3. *Let $G = (V, E, \nu)$ be a CL -tableau for (X, Γ) . Let $v \in V$ be a node with $Status(v) = \text{unsat}$. Then:*

- case $Type(v) = \text{state}$: $FullLabel(v)$ is L -unsatisfiable w.r.t. Γ
- case $Type(v) = \text{non-state}$ and $StatePred(v) = \text{null}$: $FullLabel(v)$ is L -unsatisfiable w.r.t. Γ

- case $Type(v) = \text{non-state}$ and $v_0 = \text{StatePred}(v) \neq \text{null}$: there are no L -model M and $x, y \in \Delta^M$ such that M validates Γ , $(x, y) \in \sigma^M$, $M, x \models \text{FullLabel}(v_0)$ and $M, y \models \text{FullLabel}(v)$, where $v_1 = \text{ATPred}(v)$ and $\text{CELabel}(v_1)$ is of the form $\langle \sigma \rangle \psi$.

Proof. We prove this by induction on $D\text{TimeStamp}(v)$.

If $\perp \in \text{Label}(v)$ or there exists $\{\varphi, \overline{\varphi}\} \subseteq \text{Label}(v)$ then $\text{FullLabel}(v)$ is clearly L -unsatisfiable w.r.t. Γ . So, in the rest of this proof, we exclude this case.

Consider the case when $Type(v) = \text{state}$.

We have that $\text{Kind}(v) = \text{and-node}$. There exists a successor w of v with $\text{Status}(w) = \text{unsat}$ and $D\text{TimeStamp}(w) < D\text{TimeStamp}(v)$. By the inductive assumption, $\text{FullLabel}(w)$ is L -unsatisfiable w.r.t. Γ . Since $DFmls(w) = \emptyset$, by assertion 4 of Lemma 3.3, it follows that $\text{Label}(w)$ is L -unsatisfiable w.r.t. Γ . Hence $\text{Label}(v)$ and $\text{FullLabel}(v)$ are L -unsatisfiable w.r.t. Γ .

Consider the case when $Type(v) = \text{non-state}$ and $\text{StatePred}(v) = \text{null}$.

We have that $\text{Kind}(v) = \text{or-node}$. Let w_1, \dots, w_k be all the successors of v . We must have that, for all $1 \leq i \leq k$, $\text{Status}(w_i) = \text{unsat}$ and $D\text{TimeStamp}(w_i) < D\text{TimeStamp}(v)$. By the inductive assumption, for all $1 \leq i \leq k$, $\text{FullLabel}(w_i)$ is L -unsatisfiable w.r.t. Γ . By Lemma 4.2, $\text{FullLabel}(v)$ is L -unsatisfiable w.r.t. Γ .

Consider the case when $Type(v) = \text{non-state}$ and $v_0 = \text{StatePred}(v) \neq \text{null}$.

- Case when v has a successor w being a state: The node v must be expanded by the rule (*forming-state*). Since w is the only successor of v , it must be that $\text{Status}(w) = \text{unsat}$ and $D\text{TimeStamp}(w) < D\text{TimeStamp}(v)$. By the inductive assumption, $\text{FullLabel}(w)$ is L -unsatisfiable w.r.t. Γ . Hence $\text{FullLabel}(v) = \text{FullLabel}(w)$ is also L -unsatisfiable w.r.t. Γ .
- Case when v has a successor and all the successors w_1, \dots, w_k of v are non-states.
 - If $\text{Status}(v)$ was set to unsat by Step 20 of procedure **Apply** (with $w = v$) then, for $v_1 = \text{ATPred}(v)$, $\text{CELabel}(v_1)$ is of the form $\langle \sigma \rangle \psi$, $\text{Label}(v)$ contains a formula of the form $\Box_{\sigma} \neg \varphi$ and $\varphi \notin \text{AFmls}(v_0)$, $\varphi \in DFmls(v_0)$. For the sake of contradiction, suppose that there exist an L -model M and $x, y \in \Delta^M$ such that M validates Γ , $(x, y) \in \sigma^M$, $M, x \models \text{FullLabel}(v_0)$ and $M, y \models \text{FullLabel}(v)$. Since $\Box_{\sigma} \neg \varphi \in \text{Label}(v)$, it follows that $M, y \models \Box_{\sigma} \neg \varphi$, and hence $M, x \models \varphi$. This contradicts the facts that $\varphi \in DFmls(v_0)$ and $M, x \models \text{FullLabel}(v_0)$.
 - Consider the remaining case. It must be that, for all $1 \leq i \leq k$, $\text{Status}(w_i) = \text{unsat}$ and $D\text{TimeStamp}(w_i) < D\text{TimeStamp}(v)$. By the inductive assumption, for all $1 \leq i \leq k$, $\text{FullLabel}(w_i)$ is L -unsatisfiable w.r.t. Γ . By Lemma 4.2, $\text{FullLabel}(v)$ is L -unsatisfiable w.r.t. Γ . \triangleleft

Lemma 4.4 (Soundness). *Let $G = (V, E, \nu)$ be a CL-tableau for (X, Γ) . Suppose that X is L -satisfiable w.r.t. the set Γ of global assumptions. Then G has a consistent marking.*

Proof. Since $Type(\nu) = \text{non-state}$, $\text{Label}(\nu) = X \cup \Gamma$ and $DFmls(\nu) = \emptyset$, we have that $\text{FullLabel}(\nu)$ is L -satisfiable w.r.t. Γ . Let M be an L -model validating Γ and let τ be a state of M such that $M, \tau \models \text{FullLabel}(\nu)$.

Observe that, for any $v \in V$ and any $x \in \Delta^M$, if $M, x \models \text{FullLabel}(v)$ then:

- if v is a non-state then v has a successor w such that $M, x \models \text{FullLabel}(w)$ (by Lemma 4.2)
- if v is a state then, for every successor w of v with $\text{CELabel}(w)$ of the form $\langle \sigma \rangle \psi$, there exists $y \in \Delta^M$ such that $(x, y) \in \sigma^M$ and $M, y \models \text{FullLabel}(w)$.⁶

Therefore, starting from $\nu \in V$ and $\tau \in \Delta^M$ it is straightforward to construct a marking G_m of G together with a map g that associates each edge (v, w) of G_m with a pair $(x, y) \in \Delta^M \times \Delta^M$ such that:

- if v is a non-state then $x = y$

⁶ Note that $\text{CELabel}(w) \in \text{Label}(v)$.

- if v is a state and $CELabel(w)$ is of the form $\langle\sigma\rangle\psi$ then $(x, y) \in \sigma^M$
- $M, x \models \text{FullLabel}(v)$ and $M, y \models \text{FullLabel}(w)$.

By Lemma 4.3, for every node v of G_m , $\text{Status}(v) \neq \text{unsat}$. Therefore, G_m satisfies the local consistency property. We now show that G_m satisfies the global consistency property. Let v_0 be a node of G_m and let $\langle A, q \rangle \varphi \in \text{Label}(v_0)$. We show that $\langle A, q \rangle \varphi$ has a \diamond -realization in G_m starting from v_0 . By the map g , there exists $u \in \Delta^M$ such that $M, u \models \text{FullLabel}(v_0)$. Thus $M, u \models \langle A, q \rangle \varphi$ and therefore,

$$\begin{aligned} &\text{there exist a word } \gamma = \omega_1 \dots \omega_k \in \mathcal{L}((A, q)) \text{ with } k \geq 0, \text{ an} \\ &\text{accepting run } q_0 = q, q_1, \dots, q_k \text{ of } (A, q) \text{ on } \gamma, \text{ and states} \\ &u_0 = u, u_1, \dots, u_k \text{ of } M \text{ such that } M, u_k \models \varphi \text{ and, for} \\ &1 \leq i \leq k, \text{ if } \omega_i \in \Sigma \text{ then } (u_{i-1}, u_i) \in \omega_i^M, \text{ else } \omega_i \text{ is of the} \\ &\text{form } (\psi_i?) \text{ and } u_{i-1} = u_i \in \psi_i^M. \end{aligned} \tag{2}$$

We construct a \diamond -realization $(v_0, \varphi_0), \dots, (v_h, \varphi_h)$ in G_m for $\langle A, q \rangle \varphi$ at v_0 and a map $f : \{0, \dots, h\} \rightarrow \{0, \dots, k\}$ such that $f(0) = 0$, $f(h) = k$, and for every $0 \leq i < h$, if $f(i) = j$ then $f(i+1)$ is either j or $j+1$. We maintain the following invariants for $0 \leq i \leq h$:

$$\text{– the sequence } (v_0, \varphi_0), \dots, (v_i, \varphi_i) \text{ is a trace of } \langle A, q \rangle \varphi \text{ in } G_m \tag{3}$$

$$\text{– } \text{FullLabel}(v_i) \text{ is satisfied at the state } u_{f(i)} \text{ of } M \tag{4}$$

$$\text{– if } f(i) = j < k \text{ then } \varphi_i = \langle A, q_j \rangle \varphi \text{ or } \varphi_i = \langle \omega_{j+1} \rangle \langle A, q_{j+1} \rangle \varphi \tag{5}$$

$$\text{– if } f(i) = k \text{ then } \varphi_i = \langle A, q_k \rangle \varphi \text{ or } \varphi_i = \varphi. \tag{6}$$

With $\varphi_0 = \langle A, q_0 \rangle \varphi$ and $f(0) = 0$, the invariants clearly hold for $i = 0$.

Set $i := 0$. While $\varphi_i \neq \varphi$ do:

1. Set $j := f(i)$.
2. Case v_i is expanded using a static rule ρ and φ_i is the principal formula:
 - (a) Case $j < k$: Since ρ is a static rule, by the invariant (5), we must have $\varphi_i = \langle A, q_j \rangle \varphi$ or $\varphi_i = \langle \omega_{j+1} \rangle \langle A, q_{j+1} \rangle \varphi$ with $\omega_{j+1} = (\psi_{j+1}?)$.
 Consider the case $\varphi_i = \langle A, q_j \rangle \varphi$. The applied rule ρ is thus either $(\langle A \rangle)$ or $(\langle A \rangle_f)$. Let $\varphi_{i+1} = \langle \omega_{j+1} \rangle \langle A, q_{j+1} \rangle \varphi$ and let v_{i+1} be the successor of v_i with φ_{i+1} replacing φ_i . By (2), φ_{i+1} is satisfied at u_j in M , and hence, by the invariant (4), $\text{FullLabel}(v_{i+1})$ is satisfied at u_j in M . Let $f(i+1) = j$ and set $i := i+1$. Clearly, the invariants still hold.
 Now consider the case $\varphi_i = \langle \omega_{j+1} \rangle \langle A, q_{j+1} \rangle \varphi$ with $\omega_{j+1} = (\psi_{j+1}?)$. The applied rule ρ is thus $(\diamond?)$. Let $\varphi_{i+1} = \langle A, q_{j+1} \rangle \varphi$ and let v_{i+1} be the only successor of v_i . By (2), both ψ_{j+1} and $\langle A, q_{j+1} \rangle \varphi$ are satisfied at u_j in M , and hence, by the invariant (4), $\text{FullLabel}(v_{i+1})$ is satisfied at $u_j = u_{j+1}$ in M . Let $f(i+1) = j+1$ and set $i := i+1$. Clearly, the invariants still hold.
 - (b) Case $j = k$: Since $\varphi_i \neq \varphi$, by the invariant (6), we have that $\varphi_i = \langle A, q_k \rangle \varphi$. Hence $\rho = (\langle A \rangle_f)$ (since $q_k \in F_A$). Let $\varphi_{i+1} = \varphi$ and let v_{i+1} be the successor of v_i with φ_{i+1} replacing φ_i . By (2), φ_{i+1} is satisfied at u_k in M , and hence, by the invariant (4), $\text{FullLabel}(v_{i+1})$ is satisfied at u_k in M . Let $f(i+1) = k$ and set $i := i+1$. Clearly, the invariants still hold.
3. Case v_i is expanded using a static rule ρ and either ρ does not have principal formulas or φ_i is not the principal formula:
 - Case ρ does not have principal formulas or the principal formula is not of the form $\langle A', q' \rangle \varphi'$: Let $\varphi_{i+1} = \varphi_i$ and $f(i+1) = f(i) = j$. Let v_{i+1} be the successor of v_i such that (v_i, v_{i+1}) is an edge of G_m and $\text{FullLabel}(v_{i+1})$ is satisfied at the state $u_{f(i+1)}$ of M . Such a node v_{i+1} exists because $\text{FullLabel}(v_i)$ is satisfied at the state $u_{f(i)} = u_j = u_{f(i+1)}$ of M . By setting $i := i+1$, all the invariants (3)-(6) still hold.

- Case ρ has the principal formula of the form $\langle A', q' \rangle \varphi'$: During a sequence of applications of static rules between two applications of the transitional rule, proceed as for realizing $\langle A', q' \rangle \varphi'$ in G_m (like for the current \Diamond -realization of $\langle A, q \rangle \varphi$ in G_m at v_0). This decides how to choose v_{i+1} and has effects on terminating the trace (to obtain a \Diamond -realization for $\langle A, q \rangle \varphi$ in G_m at v_0). We also choose $\varphi_{i+1} = \varphi_i$ and $f(i+1) = f(i) = j$. By setting $i := i+1$, all the invariants (3)-(6) still hold.
- 4. Case v_i is expanded using the transitional rule:
 Since v_i is a state and $\varphi_i \neq \varphi$, by the invariants (5) and (6), we must have that $\varphi_i = \langle \omega_{j+1} \rangle \langle A, q_{j+1} \rangle \varphi$ with $\omega_{j+1} \in \Sigma$. Let v_{i+1} be the successor of v_i with $CELabel(v_{i+1}) = \varphi_i$. Let $\varphi_{i+1} = \langle A, q_{j+1} \rangle \varphi$ and $f(i+1) = j+1$. Clearly, the invariant (3) holds for $i+1$. By (2), φ_{i+1} is satisfied at the state u_{j+1} of M . By the invariant (4), the other formulas of $Label(v_{i+1})$ are also satisfied at the state u_{j+1} of M . That is, the invariant (4) holds for $i+1$. Clearly, the invariants (5) and (6) remain true after increasing i by 1. So, by setting $i := i+1$, all the invariants (3)-(6) still hold.

We now show that the loop terminates. Observe that any sequence of applications of static rules that contribute to the trace $(v_0, \varphi_0), \dots, (v_i, \varphi_i)$ of $\langle A, q \rangle \varphi$ in G_m eventually ends because:

- each formula not of the forms $\langle A', q' \rangle \varphi'$ and $\langle \psi' ? \rangle \varphi'$ may be reduced at most once
- each formula of the form $\langle \psi' ? \rangle \varphi'$ is reduced to ψ' and φ'
- each formula of the form $\langle A', q' \rangle \varphi'$ is reduced according to some \Diamond -realization.

That is, sooner or later either $\varphi_i = \varphi$ or v_i is a node that is expanded by the transitional rule. In the second case, if $f(i) = j$ then $f(i+1) = j+1$. As the image of f is $\{0, \dots, k\}$, the construction of the trace must end at some step (with $\varphi_i = \varphi$) and we obtain a \Diamond -realization in G_m for $\langle A, q \rangle \varphi$ at v_0 . \triangleleft

4.2 Model Graphs

We will prove completeness of \mathcal{CL} via model graphs [25,10,19,22,21].

Definition 4.5. A *model graph* (also known as a *Hintikka structure*) is a tuple $\langle W, R, H \rangle$, where W is a set of nodes, R is a mapping that associates each $\sigma \in \Sigma$ with a binary relation R_σ on W , and H is a mapping that associates each node of W with a set of formulas. \triangleleft

We use model graphs merely as data structures, but we are interested in consistent and saturated model graphs as defined below. Model graphs differ from “and-or” graphs in that a model graph contains only “and”-nodes and its edges are labeled by simple programs. Roughly speaking, given an “and-or” graph G with a consistent marking G_m , to construct a model graph one can stick together the nodes in a “saturation path” of a node of G_m to create a node for the model graph. Details will be given later.

A trace of a formula $\langle A, q \rangle \varphi$ at a node in a model graph is defined analogously as for the case of “and-or” graphs, as stated in the following definition.

Definition 4.6. Given a model graph $M = \langle W, R, H \rangle$ and a node $v \in W$, a *trace* of a formula $\langle A, q \rangle \varphi \in H(v)$ (starting from v) is a sequence $(v_0, \varphi_0), \dots, (v_k, \varphi_k)$ such that:

- $v_0 = v$ and $\varphi_0 = \langle A, q \rangle \varphi$,
- for every $1 \leq i \leq k$, $\varphi_i \in H(v_i)$,
- for every $1 \leq i \leq k$, if $v_i = v_{i-1}$ then:
 - φ_{i-1} is of the form $\langle A, q' \rangle \varphi$ and $\varphi_i = \langle \omega \rangle \langle A, q'' \rangle \varphi$ for some ω and q'' such that $(q', \omega, q'') \in \delta_A$, or
 - φ_{i-1} is of the form $\langle A, q' \rangle \varphi$ with $q' \in F_A$, $\varphi_i = \varphi$, and $i = k$, or
 - φ_{i-1} is of the form $\langle \psi ? \rangle \langle A, q' \rangle \varphi$ and $\varphi_i = \langle A, q' \rangle \varphi$

- for every $1 \leq i \leq k$, if $v_i \neq v_{i-1}$ then φ_{i-1} is of the form $\langle \sigma \rangle \langle A, q' \rangle \varphi$, $\sigma \in \Sigma$, $\varphi_i = \langle A, q' \rangle \varphi$, and $(v_{i-1}, v_i) \in R_\sigma$.

A trace $(v_0, \varphi_0), \dots, (v_k, \varphi_k)$ of $\langle A, q \rangle \varphi$ in a model graph M is called a \diamond -realization for $\langle A, q \rangle \varphi$ at v_0 if $\varphi_k = \varphi$. \triangleleft

Similarly as for markings of “and-or” graphs, we define the consistency of a model graph as follows.

Definition 4.7. A model graph $M = \langle W, R, H \rangle$ is *consistent* if:

- *local consistency*: for every $v \in W$, $H(v)$ contains neither \perp nor a *clashing pair* of the form p and $\neg p$; and
- *global consistency*: for every $v \in W$, every formula $\langle A, q \rangle \varphi$ of $H(v)$ has a \diamond -realization (at v). \triangleleft

Definition 4.8. A model graph $M = \langle W, R, H \rangle$ is said to be *CL-saturated* if the following conditions hold for every $v \in W$ and every $\varphi \in H(v)$:

- if $\varphi = \psi \wedge \xi$ then $\{\psi, \xi\} \subset H(v)$
- if $\varphi = \psi \vee \xi$ then $\psi \in H(v)$ or $\xi \in H(v)$
- if $\varphi = [\alpha]\psi$ and $I_{\mathbf{A}_\alpha} = \{q_1, \dots, q_k\}$ then $\{[\mathbf{A}_\sigma, q_1]\psi, \dots, [\mathbf{A}_\sigma, q_k]\psi\} \subset H(v)$
- if $\varphi = [A, q]\psi$ and $\delta_A(q) = \{(\omega_1, q_1), \dots, (\omega_k, q_k)\}$ then $\{\Box_{\omega_1}[A, q_1]\psi, \dots, \Box_{\omega_k}[A, q_k]\psi\} \subset H(v)$
- if $\varphi = [A, q]\psi$ and $\underline{q} \in F_A$ then $\psi \in H(v)$
- if $\varphi = \Box_{(\xi?)}\psi$ then $\xi \in H(v)$ or $\psi \in H(v)$
- if $\varphi = \langle \alpha \rangle \psi$, $\alpha \notin \Sigma$, α is not a test and $I_{\mathbf{A}_\alpha} = \{q_1, \dots, q_k\}$ then one of the formulas $\langle \mathbf{A}_\alpha, q_1 \rangle \psi, \dots, \langle \mathbf{A}_\alpha, q_k \rangle \psi$ belongs to $H(v)$
- if $\varphi = \langle \xi? \rangle \psi$ then $\xi \in H(v)$ ⁷
- if $\varphi = \langle \sigma \rangle \psi$ then there exists w such that $R_\sigma(v, w)$ and $\psi \in H(w)$
- if $\varphi = \Box_\sigma \psi$ and $R_\sigma(v, w)$ holds then $\psi \in H(w)$
- if $\varphi = \Box_\sigma \psi$ and $R_{\sigma-}(u, v)$ holds then $\psi \in H(u)$. \triangleleft

Definition 4.9. Given a model graph $M = \langle W, R, H \rangle$, the *L-model corresponding to M* is the Kripke model M' such that $\Delta^{M'} = W$, $p^{M'} = \{w \in W \mid p \in H(w)\}$ for $p \in \mathcal{PROP}$, $\varrho^{M'} = R'_\varrho$ for $\varrho \in \Sigma^+$, where R'_σ for $\sigma \in \Sigma$ are the smallest binary relations on W such that:

- $R_\sigma \subseteq R'_\sigma$ and $R'_{\sigma-} = (R'_\sigma)^{-1}$ for every $\sigma \in \Sigma$, and
- if $\sigma \rightarrow \varrho_1 \dots \varrho_k \in S$, where S is the symmetric regular semi-Thue system of L , then $R'_{\varrho_1} \circ \dots \circ R'_{\varrho_k} \subseteq R'_{\sigma-}$. ⁸ \triangleleft

The smallest binary relations mentioned in the above definition exist because:

- $R'_{\sigma-} = (R'_\sigma)^{-1}$ iff $(R'_{\sigma-})^{-1} \subseteq R'_\sigma$ and $(R'_\sigma)^{-1} \subseteq R'_{\sigma-}$
- an expression of the form $R^{-1} \subseteq R'$ is equivalent to $\forall x, y (R(y, x) \rightarrow R'(x, y))$
- an expression of the form $R_1 \circ \dots \circ R_h \subseteq R'$ is equivalent to

$$\forall x_0, \dots, x_h (R_1(x_0, x_1) \wedge \dots \wedge R_h(x_{h-1}, x_h) \rightarrow R'(x_0, x_h))$$

- a set of first-order program clauses like the ones listed above is called a Datalog program and always has the smallest model.

Define the NCNF of $\neg \Box_\sigma \varphi$ to be $\langle \sigma \rangle \bar{\varphi}$. Recall that the NCNF of $\neg[\alpha]\varphi$, $\neg \langle \alpha \rangle \varphi$, $\neg[A, q]\varphi$, $\neg \langle A, q \rangle \varphi$ are $\langle \alpha \rangle \bar{\varphi}$, $[\alpha] \bar{\varphi}$, $\langle A, q \rangle \bar{\varphi}$, $[A, q] \bar{\varphi}$, respectively.

⁷ The condition $\psi \in H(v)$ is taken care of by the global consistency.

⁸ Note that the symmetry of S is essential here.

Lemma 4.10. *Let $M = \langle W, R, H \rangle$ be a consistent and CL-saturated model graph and let M' be the L-model corresponding to M . Then, for any $w \in W$, if $M', w \models \varphi$ or $\varphi \in H(w)$ then $\bar{\varphi} \notin H(w)$.*

Proof. By induction on the structure of φ , using the global consistency. \triangleleft

Lemma 4.11. *Let α be a program, $q \in Q_{\mathbf{A}_\alpha}$, and $\gamma \in \mathcal{L}((\mathbf{A}_\alpha, q))$. If the rule $\sigma \rightarrow \varrho_1 \dots \varrho_k$ belongs to S then replacing any occurrence of σ in γ by $\varrho_1 \dots \varrho_k$ results in $\gamma' \in \mathcal{L}((\mathbf{A}_\alpha, q))$.*

Proof. This lemma follows from the observation that: if $\sigma \rightarrow \varrho_1 \dots \varrho_k \in S$, $\varrho \in \Sigma$, and $\gamma_2 \in \mathcal{L}(\mathbf{A}_\varrho)$, then replacing any occurrence of σ in γ_2 by $\varrho_1 \dots \varrho_k$ results in $\gamma'_2 \in \mathcal{L}(\mathbf{A}_\varrho)$. \triangleleft

The following lemma is the main result of this subsection.

Lemma 4.12. *Let X and Γ be finite sets of formulas in NCNF of the base language, and let $M = \langle W, R, H \rangle$ be a consistent and CL-saturated model graph such that $\Gamma \subseteq H(w)$, for all $w \in W$, and $X \subseteq H(\tau)$, for some $\tau \in W$. Then the L-model M' corresponding to M validates Γ and satisfies X at τ .*

Proof. Observe that:

$$\text{-- if } [A, q]\psi \in H(w) \text{ and } R_\sigma(w, w') \text{ and } \delta_A(q, \sigma, q') \text{ then } [A, q']\psi \in H(w') \quad (7)$$

$$\text{-- if } [A, q]\psi \in H(w) \text{ and } R_{\sigma^-}(w', w) \text{ and } \delta_A(q, \sigma, q') \text{ then } [A, q']\psi \in H(w'). \quad (8)$$

These assertions hold because:

- if $[A, q]\psi \in H(w)$ and $\delta_A(q, \sigma, q')$ holds then $\Box_\sigma[A, q']\psi \in H(w)$
- if $\Box_\sigma[A, q']\psi \in H(w)$ and $R_\sigma(w, w')$ holds then $[A, q']\psi \in H(w')$
- if $\Box_\sigma[A, q']\psi \in H(w)$ and $R_{\sigma^-}(w', w)$ holds then $[A, q']\psi \in H(w')$.

Using induction on the construction of φ , we now prove that for any $u \in W$, if $\varphi \in H(u)$ and φ is a formula of the base language then $M', u \models \varphi$. Assume that $\varphi \in H(u)$. The only non-trivial cases are when

$$\varphi = [\alpha]\psi, \text{ or} \quad (9)$$

$$\varphi = \langle \alpha \rangle \psi, \text{ where } \alpha \notin \Sigma \text{ and } \alpha \text{ is not a test.} \quad (10)$$

Consider the case (9) and let $q \in I_{\mathbf{A}_\alpha}$. By Lemma 3.1, it suffices to show that $M', u \models [\mathbf{A}_\alpha, q]\psi$. Since M is CL-saturated and $\varphi \in H(u)$, we have that $[\mathbf{A}_\alpha, q]\psi \in H(u)$. Let $v \in W$ be a node such that $(u, v) \in (\mathbf{A}_\alpha, q)^{M'}$. We show that $\psi \in H(v)$. By the construction of M' and Lemma 4.11, there exist a word $\omega_1 \dots \omega_k \in \mathcal{L}((\mathbf{A}_\alpha, q))$ and elements w_0, \dots, w_k of W such that $w_0 = u$, $w_k = v$, and for every $1 \leq i \leq k$:

$$\omega_i \in \Sigma \text{ and } R_{\omega_i}(w_{i-1}, w_i) \text{ or } R_{\omega_i^-}(w_i, w_{i-1}) \text{ holds, or} \quad (11)$$

$$\omega_i \text{ is of the form } (\xi_i?) \text{ and } w_{i-1} = w_i \in \xi_i^{M'}. \quad (12)$$

Let $q_0 = q, q_1, \dots, q_k$ be an accepting run of (\mathbf{A}_α, q) on the word $\omega_1 \dots \omega_k$. We have that $q_k \in F_{\mathbf{A}_\alpha}$. We prove by an inner induction on $0 \leq i \leq k$ that $[\mathbf{A}_\alpha, q_i]\psi \in H(w_i)$. The base case $i = 0$ clearly holds. Inductively, assume that $1 \leq i \leq k$ and $[\mathbf{A}_\alpha, q_{i-1}]\psi \in H(w_{i-1})$. If (11) holds then, by (7) and (8), it follows that $[\mathbf{A}_\alpha, q_i]\psi \in H(w_i)$. Suppose that (12) holds. Since $[\mathbf{A}_\alpha, q_{i-1}]\psi \in H(w_{i-1})$ and M is CL-saturated, we have that $\Box_{(\xi_i?)}[\mathbf{A}_\alpha, q_i]\psi \in H(w_{i-1})$. Since $M', w_{i-1} \models \xi_i$, by Lemma 4.10, $\bar{\xi}_i \notin H(w_{i-1})$. Since M is CL-saturated, it follows that $[\mathbf{A}_\alpha, q_i]\psi \in H(w_{i-1})$. Since $w_{i-1} = w_i$, we also have that $[\mathbf{A}_\alpha, q_i]\psi \in H(w_i)$. This completes the inner induction. As a consequence, $[\mathbf{A}_\alpha, q_k]\psi \in H(w_k)$. Since $q_k \in F_{\mathbf{A}_\alpha}$ and $v = w_k$, it follows that $\psi \in H(v)$. By the inductive assumption, we have that $M', v \models \psi$. Therefore $M', u \models [\mathbf{A}_\alpha, q]\psi$.

Consider the case (10). Since M is CL -saturated, there exists $q \in I_{\mathbb{A}_\alpha}$ such that $\langle \mathbb{A}_\alpha, q \rangle \psi \in H(u)$. By Lemma 3.1, it suffices to show that $M', u \models \langle \mathbb{A}_\alpha, q \rangle \psi$. Since $\langle \mathbb{A}_\alpha, q \rangle \psi \in H(u)$, by the global consistency of M , there exist an accepting run $q_0 = q, q_1, \dots, q_k$ of (\mathbb{A}_α, q) on a word $\omega_1 \dots \omega_k$ and nodes $w_0 = u, w_1, \dots, w_k$ of M such that $\psi \in H(w_k)$ and, for $1 \leq i \leq k$, $\langle \mathbb{A}_\alpha, q_i \rangle \psi \in H(w_i)$ and if $\omega_i \in \Sigma$ then $R_{\omega_i}(w_{i-1}, w_i)$ holds, else ω_i is of the form $(\xi_i?)$ and $w_{i-1} = w_i$ and $\langle \xi_i? \rangle \langle \mathbb{A}_\alpha, q_i \rangle \psi \in H(w_{i-1})$. Since M is CL -saturated, in the case $\omega_i = (\xi_i?)$ we have that $\xi_i \in H(w_{i-1})$, and by the inductive assumption, it follows that $M', w_{i-1} \models \xi_i$. Hence $(w_0, w_k) \in (\mathbb{A}_\alpha, q)^{M'}$. Since $\psi \in H(w_k)$, by the inductive assumption, we have that $M', w_k \models \psi$. Hence $M', w_0 \models \langle \mathbb{A}_\alpha, q \rangle \psi$. That is, $M', u \models \langle \mathbb{A}_\alpha, q \rangle \psi$. This completes the proof. \triangleleft

4.3 Completeness

Definition 4.13. Let G be a CL -tableau for (X, Γ) , G_m be a consistent marking of a G , and v be a node of G_m . A *saturation path* of v w.r.t. G_m is a finite sequence $v_0 = v, v_1, \dots, v_k$ of nodes of G_m , with $k \geq 0$, such that, for every $0 \leq i < k$, v_i is a non-state and (v_i, v_{i+1}) is an edge of G_m , and v_k is a state. \triangleleft

Lemma 4.14. Let G be a CL -tableau for (X, Γ) with a consistent marking G_m . Then each node v of G_m has a saturation path w.r.t. G_m .

Proof. We construct a saturation path v_0, v_1, \dots of v w.r.t. G_m as follows. Set $v_0 := v$ and $i := 0$. While v_i is not a state do:

- If the principal of the static rule expanding v_i is not of the form $\langle A, q \rangle \varphi$ then let v_{i+1} be any successor of v_i that belongs to G_m and set $i := i + 1$.
- If the principal of the static rule expanding v_i is of the form $\langle A, q \rangle \varphi$ then:
 - let v_{i+1}, \dots, v_j be the longest sequence of non-states of G_m such that there exist formulas $\varphi_{i+1}, \dots, \varphi_j$ such that the sequence $(v_i, \varphi_i), \dots, (v_j, \varphi_j)$ is a prefix of a (fixed) \Diamond -realization in G_m for $\langle A, q \rangle \varphi$ at v_i ;
 - set $i := j$.

The loop terminates because:

- each formula not of the forms $\langle A, q \rangle \varphi$ and $\langle \psi? \rangle \varphi$ may be reduced at most once
- each formula of the form $\langle \psi? \rangle \varphi$ is reduced to ψ and φ
- each formula of the form $\langle A, q \rangle \varphi$ is reduced according to some \Diamond -realization. \triangleleft

We are now in position to prove completeness of the calculus.

Lemma 4.15 (Completeness). Let G be a CL -tableau for (X, Γ) . Suppose that G has a consistent marking G_m . Then X is L -satisfiable w.r.t. the set Γ of global assumptions.

Proof. We construct a model graph $M = \langle W, R, H \rangle$ as follows:

Let v_0 be the root of G_m and v_0, \dots, v_k be a saturation path of v_0 w.r.t. G_m . Set $R_\sigma := \emptyset$ for all $\sigma \in \Sigma$ and set $W := \{\tau\}$, where τ is a new node. Set further $H(\tau) := \text{Label}(v_k) \cup \text{RFmls}(v_k)$. Mark τ as *unresolved* and let $f(\tau) = v_k$. (Each node of M will be marked either as *unresolved* or as *resolved*, and f will map each node of M to a state of G_m .)

While W contains unresolved nodes, take one unresolved node w_0 and do:

1. For every formula $\langle \sigma \rangle \varphi \in H(w_0)$ (with $\sigma \in \Sigma$) do:
 - (a) Let $\varphi_0 = \langle \sigma \rangle \varphi$ and $\varphi_1 = \varphi$.
 - (b) Let $u_0 = f(w_0)$ and let u_1 be the successor of u_0 such that $\text{CELabel}(u_1) = \varphi_0$. (As a maintained property of f , u_0 is a state, $\varphi_0 \in \text{Label}(u_0)$, and therefore $\text{AfterTrans}(u_1)$ holds and $\varphi_1 \in \text{Label}(u_1)$.)

- (c) If φ is of the form $\langle A, q \rangle \psi$ then let $(u_1, \varphi_1), \dots, (u_l, \varphi_l)$ to be a \Diamond -realization in G_m for φ_1 at u_1 and let u_l, \dots, u_m to be a saturation path of u_l w.r.t. G_m .
 - (d) Else let u_1, \dots, u_m be a saturation path of u_1 w.r.t. G_m .
 - (e) Let $j_0 = 0 < j_1 < \dots < j_{n-1} < j_n = m$ be all the indices such that, for $0 \leq j \leq m$, u_j is a state of G iff $j \in \{j_0, \dots, j_n\}$. For $0 \leq s \leq n-1$, let $\langle \sigma_s \rangle \varphi_{j_{s+1}} = \text{CELabel}(u_{j_{s+1}})$. (We have that $\sigma_0 = \sigma$.)
 - (f) For $1 \leq s \leq n$ do:
 - i. Let $Z_s = \bigcup \{ \text{Label}(u_i) \cup \text{RFmls}(u_i) \mid j_{s-1} + 1 \leq i \leq j_s \}$.
 - ii. If there does not exist $w_s \in W$ such that $H(w_s) = Z_s$ then: add a new node w_s to W , set $H(w_s) := Z_s$, mark w_s as unresolved, and let $f(w_s) = u_{j_s}$.
 - iii. Add the pair (w_{s-1}, w_s) to $R_{\sigma_{s-1}}$.
2. Mark w_0 as resolved.

As H is a one-to-one function and $H(w)$ of each $w \in W$ is a subset of $\text{closure}_L(X \cup \Gamma)$, the above construction terminates and results in a finite model graph.

Observe that, in the above construction we transform the chain u_0, \dots, u_m of nodes of G_m to a chain w_0, \dots, w_n of nodes of M by sticking together nodes in every saturation path. Hence, M is CL -saturated and satisfies the local consistency property.

Suppose that $\langle A', q' \rangle \psi' \in H(w_0)$. Since u_0 is a state of the consistent marking G_m , the formula $\langle A', q' \rangle \psi'$ of $H(w_0)$ must have a (finite) trace starting from w_0 , using only w_0 (as the first component of the pairs), and ending with a pair of the form (w_0, ψ') or $(w_0, \langle \sigma' \rangle \langle A', q'' \rangle \psi')$. This together with Step 1 implies that M satisfies the global consistency property. Hence, M is a consistent and CL -saturated model graph.

Since $\text{Label}(v_0) = X \cup \Gamma$ and $\text{Label}(v_0) \subseteq \text{Label}(v_k) \cup \text{RFmls}(v_k)$, we have that $X \subseteq H(\tau)$ and $\Gamma \subseteq H(\tau)$. Consider Step 1f of the construction, as $u_{j_{s-1}}$ is an “and”-node and $u_{j_{s-1}+1}$ is a successor of $u_{j_{s-1}}$ that is created by the transitional rule, we have that $\text{Label}(u_{j_{s-1}+1}) \supseteq \Gamma$, and hence $\text{Label}(u_{j_s}) \cup \text{RFmls}(u_{j_s}) \supseteq \text{Label}(u_{j_{s-1}+1}) \supseteq \Gamma$. Hence $\Gamma \subseteq H(w_s)$ for every $w_s \in W$. By Lemma 4.12, the Kripke model corresponding to M validates Γ and satisfies X at τ . Hence, X is L -satisfiable w.r.t. Γ . \triangleleft

5 An ExpTime Tableau Decision Procedure for CPDL_{reg}

Let $G = (V, E, \nu)$ be a CL -tableau for (X, Γ) and G_m be a marking of G . The graph G_t of traces of G_m in G is defined as follows:

- nodes of G_t are pairs (v, φ) , where $v \in V$ and $\varphi \in \text{Label}(v)$
- a pair $((v, \varphi), (w, \psi))$ is an edge of G_t if v is a node of G_m , φ is of the form $\langle A, q \rangle \xi$ or $\langle \omega \rangle \langle A, q \rangle \xi$, and the sequence $(v, \varphi), (w, \psi)$ is a subsequence of a trace in G_m .

A node (v, φ) of G_t is an *end node* if φ is a formula of the base language. A node of G_t is *productive* if there is a path connecting it to an end node.

Algorithm 1 (given on page 22) is a simple EXPTIME algorithm for checking L -satisfiability of X w.r.t. Γ .

Lemma 5.1. *Let $h = |\Sigma|$ and let k be the sum of the sizes of the automata \mathbf{A}_σ (for $\sigma \in \Sigma$), and l be the size of $X \cup \Gamma$. Then Algorithm 1 for X, Γ, \mathbf{A} runs in $2^{O(n)}$ steps, where n be the size of $\text{closure}_L(X \cup \Gamma)$ and is polynomial in $k.h.l$.*

Proof. By Lemma 3.3, n is polynomial in $k.h.l$ and the graph G has $2^{O(n)}$ nodes and can be constructed in $2^{O(n)}$. For each node v of G , $\text{Label}(v) \subseteq \text{closure}_L(X \cup \Gamma)$. Constructing graphs of traces and updating statuses of nodes can be done in polynomial time in the size of G . Hence, totally, Algorithm 1 runs in $2^{O(n)}$ steps. \triangleleft

Algorithm 1: for checking L -satisfiability of X w.r.t. Γ .

Input: finite sets X and Γ of formulas in NCNF of the base language, the mapping \mathbf{A} specifying the finite automata of the symmetric regular semi-Thue system of the considered CPDL_{reg} logic L

Output: *true* if X is L -satisfiable w.r.t. Γ , and *false* otherwise

```

1 let  $G = (V, E, \nu)$  be the  $\mathcal{CL}$ -tableau constructed by  $\text{Tableau}(X, \Gamma)$  (using  $\mathbf{A}$ );
2 while  $\text{Status}(\nu) \neq \text{unsat}$  do
3   let  $G_m$  be the subgraph of  $G$  induced by the nodes with status different from unsat and incomplete;
   /* we have that  $G_m$  is a marking of  $G$  */
4   construct the graph  $G_t$  of traces of  $G_m$  in  $G$ ;
5   if there exist a node  $v$  of  $G_m$  and a formula  $\langle A, q \rangle \varphi \in \text{Label}(v)$  such that  $(v, \langle A, q \rangle \varphi)$  is not a
   productive node of  $G_t$  then
6     |  $\text{Status}(v) := \text{unsat}$ ,  $\text{PropagateStatus}(v)$ 
7   else return true
8 return false;
```

Theorem 5.2. *Let S be a symmetric regular semi-Thue system over Σ , \mathbf{A} be the mapping specifying the finite automata of S , and L be the CPDL_{reg} logic corresponding to S . Let X and Γ be finite sets of formulas in NCNF of the base language. Then Algorithm 1 is an EXPTIME (optimal) decision procedure for checking whether X is L -satisfiable w.r.t. the set Γ of global assumptions.*

Proof. It is straightforward to prove by induction that the algorithm has the invariant that a consistent marking of G cannot contain any node with status *unsat*. For the base step, use Theorem 3.4 and the local consistency property. For the induction step, use Theorem 3.4 and the global consistency property.

The algorithm returns *false* only when $\text{Status}(\nu) = \text{unsat}$, i.e., only when G does not have any consistent marking. At Step 7, G_m is a consistent marking of G . That is, the algorithm returns *true* only when G has a consistent marking. Therefore, by Theorem 3.4, Algorithm 1 is a decision procedure for the considered problem. The complexity was established by Lemma 5.1. \triangleleft

Clearly, one may modify procedure Tableau to make it stop as soon as $\text{Status}(\nu) = \text{unsat}$. We excluded this condition just to formalize and prove Theorem 3.4, but it does not affect correctness of Theorem 5.2.

6 Checking Global Consistency On-the-Fly

Observe that Algorithm 1 first constructs a \mathcal{CL} -tableau and then checks whether the tableau contains a consistent marking. To speed up the performance these two tasks can be done concurrently. For this we can update G_m and G_t during the construction of G and detect and propagate *unsat* (and *sat*) on-the-fly using both the local and global consistency properties as discussed below.

For nodes (v, φ) of the graph of traces G_t , define $\text{SemiEndNodes}(v, \varphi)$ to be the smallest sets of nodes of G_t that satisfy the following conditions:

- if (v, φ) is an end node of G_t or $\text{Status}(v) \in \{\text{unexpanded}, \text{sat}\}$ then $\text{SemiEndNodes}(v, \varphi) = \{(v, \varphi)\}$,
- else $\text{SemiEndNodes}(v, \varphi) = \bigcup \{\text{SemiEndNodes}(w, \psi) \mid (w, \psi) \text{ is a successor of } (v, \varphi) \text{ in } G_t \text{ different from } (v, \varphi)\} \setminus \{(v, \varphi)\}$.

Observe that, during the construction of G and G_t , if $\text{SemiEndNodes}(v, \varphi) = \emptyset$ then (v, φ) is not and will never be a productive node of G_t and hence $\text{Status}(v)$ can be set to *unsat*. Furthermore, at the end (i.e., when G is a full “and-or” graph, G_m is the subgraph of G induced

by the nodes with status different from **unsat** and **incomplete**, and G_t is the graph of traces of G_m in G), if a node (v, φ) of G_t has $SemiEndNodes(v, \varphi) \neq \emptyset$ then (v, φ) is a productive node of G_t .

An improved EXPTIME tableau decision procedure for checking L -satisfiability of X w.r.t. Γ is as follows. During the construction of a \mathcal{CL} -tableau for (X, Γ) :

- let $G = (V, E, \nu)$ be the current (partial) “and-or” graph;
- update G_m on-the-fly so that it is the subgraph of G induced by the nodes with status different from **unsat** and **incomplete**;
- update G_t on-the-fly so that it is the graph of traces of G_m in G ;
- update $SemiEndNodes(v, \varphi)$ on-the-fly for nodes (v, φ) of G_t as follows:
 - when a new node v with status **unexpanded** is created for G , for every node (v, φ) created for G_t , set $SemiEndNodes(v, \varphi) := \{(v, \varphi)\}$,
 - when a node v of G receives status **sat**, for every node (v, φ) of G_t , set $SemiEndNodes(v, \varphi) := \{(v, \varphi)\}$,
 - when a node v of G is expanded and receives status **expanded**,
 - * for every end node (v, φ) of G_t , set $SemiEndNodes(v, \varphi) := \{(v, \varphi)\}$,
 - * for every non-end node (v, φ) of G_t , set

$$SemiEndNodes(v, \varphi) := \bigcup \{SemiEndNodes(w, \psi) \mid (w, \psi) \text{ is a successor of } (v, \varphi) \text{ in } G_t \text{ different from } (v, \varphi)\} \setminus \{(v, \varphi)\}; \quad (13)$$

- when a node (w, ψ) of G_t has $SemiEndNodes(w, \psi)$ changed, for every predecessor (v, φ) of (w, ψ) in G_t , update $SemiEndNodes(v, \varphi)$ by (13);
- when a node w of G receives status **unsat** or **incomplete** or is deleted, for every node (v, φ) of G_t that is a predecessor of some (w, ψ) , update $SemiEndNodes(v, \varphi)$ by (13);
- when a node (v, φ) of G_t receives $SemiEndNodes(v, \varphi) = \emptyset$, set $Status(v) := \mathbf{unsat}$ and execute **PropagateStatus**(v);
- when the root ν of G receives status **unsat**, return **false** (which means X is not L -satisfiable w.r.t. Γ);
- at the end (not terminated as in the above case), return **true** (which means X is L -satisfiable w.r.t. Γ).

See also [20] for other possible optimization techniques, which have been implemented and evaluated for the description logic \mathcal{ALC} .

7 Conclusions

As discussed in the introduction, translating the general satisfiability checking problem in CPDL_{reg} into the satisfiability checking problem in CPDL may increase the complexity (and may decrease efficiency). Therefore, the direct approach for automated reasoning in CPDL_{reg} is worth studying.

In this paper we have given a tableau calculus and the first cut-free EXPTIME tableau decision procedure for checking satisfiability in the logic CPDL_{reg}. Our decision procedure uses global caching for states and local caching for non-states in tableaux. In comparison with the tableau calculus given in our joint papers [6,8] for CPDL_{reg}, the tableau calculus given in the current paper is essentially better since it is cut-free. Furthermore, we have explicitly incorporated on-the-fly propagation of local (in)consistency into the latter calculus and the corresponding decision procedure. We have also discussed how on-the-fly propagation of global (in)consistency can be incorporated into the tableau decision procedure.

When restricted to REG^c, our tableau decision procedure is much better than the one proposed by us and Szalas in [22] for REG^c, as it does not use cuts and it does not have to check the global consistency property (this is an effect of cut elimination).

On technical matters, apart from global caching of states as in the works [14,15] by Goré and Widmann, we allow to cache also non-states. We apply global caching for nodes in the local graphs of non-states v satisfying **AfterTrans**(v). Such local graphs in [14,15] are trees. We propose not to delay solving incompatibility w.r.t. converse as long as in [14,15].⁹ One can solve incompatibility w.r.t. converse as soon as possible as done in this paper. By giving a higher priority to the current branch even when it involves converse we can further favor depth-first search.

References

1. F. Baader and U. Sattler. An overview of tableau algorithms for description logics. *Studia Logica*, 69:5–40, 2001.
2. G. De Giacomo and F. Massacci. Combining deduction and model checking into tableaux and algorithms for Converse-PDL. *Information and Computation*, 162(1-2):117–137, 2000.
3. S. Demri. The complexity of regularity in grammar logics and related modal logics. *Journal of Logic and Computation*, 11(6):933–960, 2001.
4. S. Demri and H. de Nivelle. Deciding regular grammar logics with converse through first-order logic. arXiv:cs.LO/0306117, 2004.
5. S. Demri and H. de Nivelle. Deciding regular grammar logics with converse through first-order logic. *Journal of Logic, Language and Inform.*, 14(3):289–329, 2005.
6. B. Dunin-Kępicz, L.A. Nguyen, and A. Szalas. A framework for graded beliefs, goals and intentions. *Fundam. Inform.*, 100(1-4):53–76, 2010.
7. B. Dunin-Kępicz, L.A. Nguyen, and A. Szalas. Tractable approximate knowledge fusion using the Horn fragment of serial propositional dynamic logic. *Int. J. Approx. Reasoning*, 51(3):346–362, 2010.
8. B. Dunin-Kępicz, L.A. Nguyen, and A. Szalas. Converse-PDL with regular inclusion axioms: a framework for MAS logics. *Journal of Applied Non-Classical Logics*, 21(1):61–91, 2011.
9. G. De Giacomo and M. Lenzerini. TBox and ABox reasoning in expressive description logics. In L.C. Aiello, J. Doyle, and S.C. Shapiro, editors, *Proceedings of KR’1996*, pages 316–327. Morgan Kaufmann, 1996.
10. R. Goré. Tableau methods for modal and temporal logics. In D’Agostino et al, editor, *Handbook of Tableau Methods*, pages 297–396. Kluwer, 1999.
11. R. Goré and L.A. Nguyen. A tableau system with automaton-labelled formulae for regular grammar logics. In B. Beckert, editor, *Proceedings of TABLEAUX 2005, LNAI 3702*, pages 138–152. Springer-Verlag, 2005.
12. R. Goré and L.A. Nguyen. Analytic cut-free tableaux for regular modal logics of agent beliefs. In F. Sadri and K. Satoh, editors, *Proceedings of CLIMA VIII*, pages 274–289, 2007.
13. R. Goré and L.A. Nguyen. EXPTIME tableaux with global caching for description logics with transitive roles, inverse roles and role hierarchies. In N. Olivetti, editor, *Proc. of TABLEAUX 2007, LNAI 4548*, pages 133–148. Springer-Verlag, 2007.
14. R. Goré and F. Widmann. Sound global state caching for \mathcal{ALC} with inverse roles. In M. Giese and A. Waaler, editors, *Proceedings of TABLEAUX 2009*, volume 5607 of *LNCS*, pages 205–219. Springer, 2009.
15. R. Goré and F. Widmann. Optimal and cut-free tableaux for propositional dynamic logic with converse. In J. Giesl and R. Hähnle, editors, *Proceedings of IJCAR 2010*, volume 6173 of *LNCS*, pages 225–239. Springer, 2010.
16. D. Harel, D. Kozen, and J. Tiuryn. *Dynamic Logic*. MIT Press, 2000.
17. I. Horrocks, O. Kutz, and U. Sattler. The even more irresistible *SROIQ*. In P. Doherty, J. Mylopoulos, and C.A. Welty, editors, *Proc. of KR’2006*, pages 57–67. AAAI Press, 2006.
18. A. Mateescu and A. Salomaa. Formal languages: an introduction and a synopsis. In *Handbook of Formal Languages - Volume 1*, pages 1–40. Springer, 1997.
19. L.A. Nguyen. Analytic tableau systems and interpolation for the modal logics KB, KDB, K5, KD5. *Studia Logica*, 69(1):41–57, 2001.
20. L.A. Nguyen. An efficient tableau prover using global caching for the description logic \mathcal{ALC} . *Fundamenta Informaticae*, 93(1-3):273–288, 2009.
21. L.A. Nguyen and A. Szalas. An optimal tableau decision procedure for Converse-PDL. In N.-T. Nguyen, T.-D. Bui, E. Szczerbicki, and N.-B. Nguyen, editors, *Proceedings of KSE’2009*, pages 207–214. IEEE Computer Society, 2009.
22. L.A. Nguyen and A. Szalas. A tableau calculus for regular grammar logics with converse. In Renate A. Schmidt, editor, *Proceedings of CADE-22*, volume 5663 of *LNAI*, pages 421–436. Springer-Verlag, 2009.
23. L.A. Nguyen and A. Szalas. Checking consistency of an ABox w.r.t. global assumptions in PDL. *Fundamenta Informaticae*, 102(1):97–113, 2010.
24. V.R. Pratt. A near-optimal method for reasoning about action. *J. Comp. Syst. Sci.*, 20(2):231–254, 1980.
25. W. Rautenberg. Modal tableau calculi and interpolation. *JPL*, 12:403–423, 1983.
26. M.Y. Vardi. Reasoning about the past with two-way automata. In K.G. Larsen, S. Skyum, and G. Winskel, editors, *Proceedings of ICALP’98*, volume 1443 of *LNCS*, pages 628–641. Springer, 1998.

⁹ Recall the example with $\{p, \langle \sigma \rangle [\sigma^-] \neg p, [\sigma] ((p_1 \vee q_1) \wedge \dots \wedge (p_n \vee q_n))\}$.