iqiyi Submission to ActivityNet Challenge 2019 Kinetics-700 challenge: Hierarchical Group-wise Attention

Qian Liu, Dongyang Cai, Jie Liu, Nan Ding, Tao Wang iqiyi, Inc.

Abstract

In this report, the method for the iqivi submission to the task of ActivityNet 2019 Kinetics-700 challenge is described. Three models are involved in the model ensemble stage: TSN, HG-NL and StNet. We propose the hierarchical group-wise non-local (HG-NL) module for frame-level features aggregation for video classification. The standard non-local (NL) module is effective in aggregating framelevel features on the task of video classification but presents low parameters efficiency and high computational cost. The HG-NL method involves a hierarchical group-wise structure and generates multiple attention maps to enhance performance. Basing on this hierarchical group-wise structure, the proposed method has competitive accuracy, fewer parameters and smaller computational cost than the standard NL. For the task of ActivityNet 2019 Kinetics-700 challenge, after model ensemble, we finally obtain an averaged top-1 and top-5 error percentage 28.444% on the test set.

1. Introduction

Video classification is one of the challenging tasks in computer vision. Publicly challenges and available video datasets accelerate the research processing, especially the ActivityNet series challenges and related datasets. In recent years, deep convolutional neural networks (CNNs) bring remarkable improvements on the accuracy of video classification [7, 1, 5, 3].

In this report, the method for the iqiyi submission to the trimmed activity recognition (Kinetics) tasks of the ActivityNet Large Scale Activity Recognition Challenge 2019 is described. The Kinetics-700 dataset covers 700 human action classes and consists of approximately 650,000 video clips. And, each clip lasts around 10 seconds.

In our model ensemble stage, three models are involved: TSN[7], HG-NL and StNet[4]. We propose the hierarchical group-wise non-local (HG-NL) module for frame-level features aggregation for video classification. Frequently-used aggregating methods include maximum, evenly averaging and weighted averaging. The NL module in [8] is also able to be used for aggregating framelevel features. However, the NL module in [8] presents low parameters efficiency and high computational cost, as discussed in detail later in this paper.

We address the problem of building a highly efficient self-attention based frame-level features aggregation module. The Hierarchical Group-wise Non-Local (HG-NL) module for frame-level features aggregation is proposed. Comparison with NL in [8], the HG-NL module has fewer parameters and smaller computational cost. The proposed module involves a hierarchical group-wise structure, which includes the primary grouped convolutions and the secondary grouped matrix multiplication. Moreover, HG-NL generates multiple attention maps. It brings one attention map for each feature group in the entire feature matrix and can mine the non-local information in features in detail.

2. Method

2.1. HG-NL

In this section, the HG-NL is presented in detail.

2.1.1 Formulation of Frame-level Features Aggregation

Considering a video v, a sequence of frames $\{s_1, s_2, s_n\}$ (*n* is the length of a sequence of frames) are extracted from the entire video via some specific rules.

The feature information of a single frame is obtained via a pre-trained convolution network:

$$f_i = C(s_i),\tag{1}$$

where s_i denotes the *i*-th frame, f_i is the feature information of s_i , and $C(\cdot)$ denotes the ConvNet operating.

The compact video-level features can be obtained via aggregating the features from multiple frames:

$$F_v = Agg(f_1, f_2, f_n),$$
 (2)

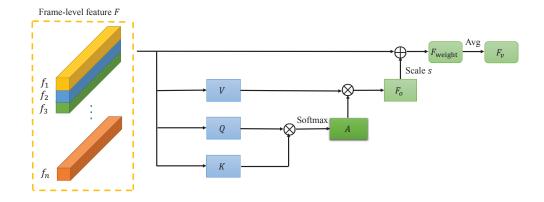


Figure 1. Self-Attention (Non-local) Based Frame-level Features Aggregation (\oplus denotes element-wise sum and \otimes denotes matrix multiplication).

Table 1. The number of parameters in NL and HG-NL ($m = 1024, g_1 = 16$ and $g_2 = 8$). The parameters of HG-NL is about 8 - 14 times fewer than NL method. It is roughly 70 times fewer if parameters are shared across groups in a grouped convolutional layer in HG-NL.

	NL $(m_1 = m/2)$	NL $(m_1 = m/8)$	HG-NL $(m_1 = m/8)$	HG-NL (shared parameters, $m_1 = m/8$)
W_q	0.5248M	0.1312M	8.32K	0.52k
W_k	0.5248M	0. 1312M	8.32K	0.52k
W_v	1.0496M	1.0496M	132.096k	16.512k
Others	_	_	-	-
All	2.0992M	1.312M	148.736K	17.552k

where $Agg(\cdot)$ is the aggregating function, n is the length of a sequence of frames, and F_v denotes the compact videolevel features. The output based on the attention map A is

$$F_o = VA,\tag{4}$$

2.1.2 Self-Attention (Non-local) Based Frame-level Features Aggregation

In self-attention module, the response of a position is computed with weighted average of all positions in an embedding space. As a representative module of attention mechanism, the NL in [8] is adopted to aggregate frame-level features here and is able to obtain long-rang dependencies across the frames.

Let $F' = [f_1, f_2, , f_n] \in \mathbb{R}^{m \times n}$, where *m* is the length of each frame's feature vector. $F \in \mathbb{R}^{m \times n \times 1}$, which denotes the feature information of *n* frames, can be obtained via reshaping the size of F' to $m \times n \times 1$ (corresponding to C * H * W). Then, an attention map having the size of $n \times n$ and containing the relationships between every pair of frames can be obtained

$$A = \operatorname{softmax}(Q^T K), \tag{3}$$

where $Q = W_q F$, $K = W_k F$, and weight matrices $W_q \in \mathbb{R}^{m_1 \times m}$ and $W_k \in \mathbb{R}^{m_1 \times m}$ are learned parameters. Commonly, weight matrices W_q , W_k are implemented as 1×1 convolutions. where $V = W_v F$ and weight matrices $W_v \in \mathbb{R}^{m \times m}$ is also operated as 1×1 convolutions.

After this, F_{weight} can be obtained

$$F_{\text{weight}} = s \cdot F_o + F. \tag{5}$$

In the above formulation, s is a scale parameter and the output F_{weight} has the same size as the input signal F.

The video-level feature F_v is obtained via evenly averaging of F_{weight}

$$F_v = \operatorname{avg}(F_{\text{weight}}). \tag{6}$$

Figure 1 shows the schema of the NL module for framelevel features aggregation.

Analysis of NL module The NL module is effective for aggregating frame-level features. However, the NL module presents low parameters efficiency and high computational cost. The number of parameters in the NL module is computed as follows. For convolution layers corresponding to W_q , W_k and W_v , the number of their parameters is $(1 \times 1 \times m \times m_1 + m_1), (1 \times 1 \times m \times m_1 + m_1)$ and $(1 \times 1 \times m \times m + m)$ individually. When m = 1024, the number of parameters in the NL module can be computed

	NL $(m_1 = m/2)$	NL $(m_1 = m/8)$	HG-NL ($m_1 = m/8$)
$W_q F$	m^2n	$m^2 n/4$	$m^2 n / (4g_1)$
W_kF	m^2n	$m^2 n/4$	$m^2 n / (4g_1)$
$W_v F$	$2m^2n$	$2m^2n$	$2m^2n/g_2$
$Q^T K / Gmm(Q, K)$	$n^2m - n^2$	$n^2m/4 - n^2$	$n^2m/4 - g_2n^2$
$\operatorname{Softmax}(\cdot) / \operatorname{Relu}(\cdot)$	_	-	-
VA/Gmm(V, A)	mn(2n-1)	mn(2n-1)	mn(2n-1)

Table 2. MAdds (multiply-adds) of NL and HG-NL. Each convolution layer in HG-NL has g1(=16) or g2(=8) times fewer MAdds than NL. The MAdds of other non-convolution layers keep roughly unchanged.

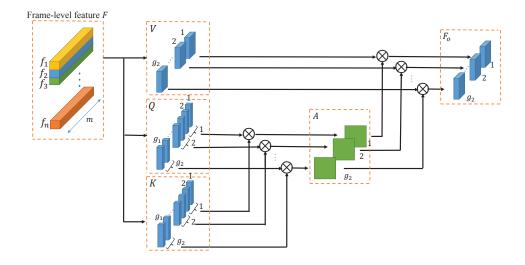


Figure 2. Hierarchical Group-wise Non-local module ($g_1 = 2g_2$). V, Q and K are obtained via grouped convolutions. A and F_o are obtained using grouped matrix multiplication.

and shown in Table 1. As shown in Table 1, if $m_1 = m/8$, the number of parameters is about 1.31M. If $m_1 = m/2$, the number of parameters is about 2M. The number is quite large for the practical use. In contrast, many backbone networks have very small number of parameters, such as MobileNetV2 [6] (3.4M), MobileNetV2-1.4 (6.9M), MF-Net-2D (5.8M), MF-Net-3D [2] (8.0M) and I3D-RGB [1] (12.1 M). As for the computational complexity, when m = 1024, the total number of multiply-adds (MAdds) required in convolution layers in NL is about 4n M (when $m_1 = m/2$) and 2.5n M (when $m_1 = m/8$). Therefore, it makes sense to reduces parameters redundancy and computational cost of NL module.

2.1.3 Hierarchical Group-wise Non-local Module

In order to reduce parameters redundancy and computational cost, the Hierarchical Group-wise Non-local (HG-NL) module for fame-level features aggregation is proposed. HG-NL has the hierarchical group-wise structure and generates several attention maps. The HG-NL module for fame-level features aggregation is performed as following.

Firstly, in HG-NL, weight matrices W_q , W_k are implemented as 1×1 grouped convolutions with the number of groups being g_1 . The grouped convolutions can reduce the parameters and the number of operations measured by MAdds largely.

After this, the attention map A is computed:

$$A = \operatorname{Relu}(\operatorname{Gmm}(Q, K)), \tag{7}$$

where $\text{Gmm}(\cdot)$ denotes the grouped matrix multiplication with the number of groups being $g_2, A \in \mathbb{R}^{g_2 \times n \times n}$ includes g_2 attention maps, and each attention map has size $n \times n$.

As shown in Figure 2, the grouped matrix multiplication in Eq (7) brings one attention map for each feature group in V, and the number of attention map achieves g_2 . This can mine the non-local information in features more detailedly and effectively. As for the NL, only one attention map occurs. Besides, the softmax is deleted in HG-NL. The computation of Relu(·) in Eq (7) is lightweight, and the Relu(·) can provide the non-linearity for the HG-NL module. Then, keeping the same groups as in the grouped matrix multiplication in Eq (7), weight matrices W_v is operated as 1×1 grouped convolutions with the number of groups being g_2 and F_o is computed via the grouped matrix multiplication with the number of groups being g_2

$$F_o = \operatorname{Gmm}(V, A). \tag{8}$$

At last, F_v can be obtained based on F_o via Eq (5) and Eq (6) in Section 2.1.2.

Figure 2 shows the schema of the HG-NL module $(g_1 = 2g_2)$. In general, let $g_1 = rg_2$ and r is a ratio. Then the relationship of g_1 (primary grouped convolutions) and g_2 (secondary grouped matrix multiplication) forms the hierarchical group-wise structure. Consider the value of g_1 and g_2 . Even though multiple attention maps are able to mine the non-local information more detailedly, each attention map will cover too narrow feature information if g_2 is too big. On the other hand, when g_1 is bigger, the related parameters and MAdds is smaller. Therefore, in common, the values of g_1 and g_2 are set to different values. As a special case, when g_1 equals g_2 , the effect of HG-NL is the same as processing each feature group of F via NL module individually.

Analysis of HG-NL module For convolution layers corresponding to W_q , W_k and W_v , the number of parameters of them is $g_1 \times (1 \times 1 \times (m/g_1) \times (m_1/g_1) + m_1/g_1)$, $g_1 \times (1 \times 1 \times (m/g_1) \times (m_1/g_1) + m_1/g_1)$ and $g_2 \times (1 \times 1)$ $1 \times (m/g_2) \times (m/g_2) + m/g_2$ individually. As shown in Table 1, when $m = 1024, g_1 = 16$ and $g_2 = 8$, the HG-NL only requires about 1:8 - 1:14 times fewer parameters than the NL, which has roughly $1.31M (m_1 = m/8)$ - 2.1M ($m_1 = m/2$) parameters. If parameters are shared across groups in a grouped convolutional layer in HG-NL, the number of each convolution layer's parameters will be further reduced g_1 or g_2 times. Besides, as shown in Table 2, when m = 1024, the MAdds required in convolution layers in HG-NL is about $(0.5n/g_1 + 2n/g_2)$ M and is several times fewer MAdds than convolution layers in the NL. The MAdds required in other non-convolution layers keep roughly unchanged. Thus, as we can see that the HG-NL is able to reduce the model redundancy and computational cost. Meanwhile, HG-NL can achieve the competitive accuracy as NL.

2.1.4 Implementation of HG-NL for Video Classification

Benefiting from that no fully-connected layers are included in the network architecture of HG-NL, n (the number of frames) can be arbitrarily adjusted. Thus, in the evaluation phase of the proposed HG-NL module, the number of frames selected from a video for predicting the label is not needed fixed as the same value as in the training phase and can be adjusted.

2.2. Model Ensemble

In the model ensemble stage, three models are involved: TSN[7], HG-NL and StNet[4].

3. Experiments

In this section, we report some experimental results on Kinetics-700 dataset of our method. All models are pretrained on the Kinetics-600 training set. We finetuned these models on the Kinetics-700 training set. Se-Resnext101 is adopted as the backbone network. Due to the limited time, we exploit only RGB information. In our experimens, the full-length video is divided into several equal segments, some frames are randomly selected from each segment. During our training, the number of segments is set to 3 and one frame are randomly selected from each segment. During evaluation, we follow the same testing setup as in TSN [7].

3.1. TSN

In TSN experiments, the initial learning rate is set as 0.001 and decayed by a factor of 10 at 20 epochs and 30 epochs. The maximum iteration is set as 40 epochs.

3.2. HG-NL

In HG-NL experiments, $m_1 = \frac{m}{8}$, $g_1 = 16$, $g_2 = 8$. Due to time limits, we finetuned the HG-NL on the Kinetics-700 training set for only 8 epochs with the model pre-trained by TSN in Section 3.1. The initial learning rate is set as 0.001 and decayed by a factor of 10 at 4 epochs and 6 epochs. The maximum iteration is set as 8 epochs. The results are shown in Table 3. We can see that HG-NL can obtain the top-1 accuracy of 61.83% of TSN on the Kinetics-700 validation set, as shown in Table 3.

3.3. StNet

For StNet[4], the Temporal Modeling Block and Temporal Xception Block are used in our network. We adopt the same input of TSN as the input of StNet. Because of the time limits, we only trained the network for 20 epochs on kinetics-700 datasets. The results of the StNet on kinetics-700 validation dataset is 55.7% for top1 and 78.3% for top 5 in the train phase(3-frames test).

3.4. Model Ensemble

Three models are involved in the model ensemble stage: TSN[7], HG-NL and StNet[4]. Our team finally obtains an averaged top-1 and top-5 error percentage of 28.444% on the Kinetics-700 test set.

Model	Val Accuracy in train phase (3 segments): Top-1 (%)	Val Accuracy in test phase (25 segments): Top-1 (%)					
TSN	57.38	61.83					
HG-NL	57.713	62.12					
StNet	55.7	-					

Table 3. Results of models on Kinetics-700 val set.

Table 4. Results on Kinetics-700 test set. The avg. error is an averaged top-1 and top-5 error.

Models	avg.error
Model Ensemble	0.28444

Computer Vision and Pattern Recognition, pages 7794–7803, 2018. 1, 2

4. Conclusion

In this report, our teams solution to the task of ActivityNet 2019 Kinetics-700 challenge is described. Experiment results have evidenced the effectiveness of the proposed HG-NL method. HG-NL achieves the better accuracy than the TSN baseline. With the help of the hierarchical group-wise structure, the HG-NL module has 8 - 70 times fewer parameters and several times smaller computational complexity than the NL module. After model ensemble, our team finally obtains an averaged top-1 and top-5 error percentage of 28.444% on the Kinetics-700 test set.

References

- J. Carreira and A. Zisserman. Quo vadis, action recognition? a new model and the kinetics dataset. In *proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 6299–6308, 2017. 1, 3
- [2] Y. Chen, Y. Kalantidis, J. Li, S. Yan, and J. Feng. Multi-fiber networks for video recognition. In *The European Conference* on Computer Vision (ECCV), September 2018. 3
- [3] C. Feichtenhofer, H. Fan, J. Malik, and K. He. Slowfast networks for video recognition. *arXiv preprint arXiv:1812.03982*, 2018. 1
- [4] D. He, Z. Zhou, C. Gan, F. Li, X. Liu, Y. Li, L. Wang, and S. Wen. Stnet: Local and global spatial-temporal modeling for action recognition. *arXiv preprint arXiv:1811.01549*, 2018. 1, 4
- [5] Z. Qiu, T. Yao, and T. Mei. Learning spatio-temporal representation with pseudo-3d residual networks. In *proceedings of the IEEE International Conference on Computer Vision*, pages 5533–5541, 2017. 1
- [6] M. Sandler, A. Howard, M. Zhu, A. Zhmoginov, and L.-C. Chen. Mobilenetv2: Inverted residuals and linear bottlenecks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 4510–4520, 2018.
- [7] L. Wang, Y. Xiong, Z. Wang, Y. Qiao, D. Lin, X. Tang, and L. Van Gool. Temporal segment networks: Towards good practices for deep action recognition. In *European conference* on computer vision, pages 20–36. Springer, 2016. 1, 4
- [8] X. Wang, R. Girshick, A. Gupta, and K. He. Non-local neural networks. In *Proceedings of the IEEE Conference on*