



Reimagining Urban Science: Scaling Causal Inference with Large Language Models

Yutong Xia   Ao Qu  Yunhan Zheng  Yihong Tang  Dingyi Zhuang 
Yuxuan Liang  Cathy Wu  Roger Zimmermann  Jinhua Zhao 
 MIT  NUS  McGill  HKUST (GZ)

{yutongx, qua, yunhan, dingyi, cathywu, jinhua}@mit.edu yihong.tang@mail.mcgill.ca
yuxliang@outlook.com dcsrz@nus.edu.sg

Abstract

Urban causal research is essential for understanding the complex dynamics of cities and informing evidence-based policies. However, it is challenged by the inefficiency and bias of hypothesis generation, barriers to multimodal data complexity, and the methodological fragility of causal experimentation. Recent advances in large language models (LLMs) present an opportunity to rethink how urban causal analysis is conducted. This Perspective examines current urban causal research by analyzing taxonomies that categorize research topics, data sources, and methodological approaches to identify structural gaps. We then introduce an LLM-driven conceptual framework, **AutoUrbanCI**, composed of four distinct modular agents responsible for hypothesis generation, data engineering, experiment design and execution, and results interpretation with policy recommendations. We propose evaluation criteria for rigour and transparency, and reflect on implications for human–AI collaboration, equity, and accountability. We call for a new research agenda that embraces AI-augmented workflows not as replacements for human expertise, but as tools to broaden participation, improve reproducibility, and unlock more inclusive forms of urban causal reasoning.


“Cities have the capability of providing something for everybody, only because, and only when, they are created by everybody.”

Jane Jacobs

1 Introduction

Cities are complex systems at the heart of society’s most pressing challenges, from transportation congestion and housing affordability to climate resilience and equitable public services (Ritchie et al., 2024; United Nations, 2015; Xia et al., 2022). Scientific progress in urban research equips policymakers, planners, and communities with the knowledge to design evidence-based interventions that shape urban futures (Batty, 1997). Among these advances, causal inference lies at the heart of scientific urban research, offering tools to move beyond correlation and evaluates the true impacts of interventions (Baum-Snow and Ferreira, 2015). Causal inference methods have powered studies on how high-speed rail alters commuting patterns (Heuermann and Schmieder, 2019) how electric vehicle charging stations influence local economies (Zheng et al., 2024a), and how vaccine mandates affect immunization uptake (Karaivanov et al., 2022). Yet, despite its centrality, causal inference in urban contexts still faces structural limitations that restrict the scope, speed, and inclusivity of discovery.

Current urban causal research faces three major challenges: 1) *Hypothesis discovery is slow and biased*: research questions are often manually crafted and shaped by disciplinary precedent or funding priorities, overlooking emerging issues and underrepresenting smaller cities or informal settlements (Bell and Jayne, 2009; Müller et al., 2025); 2) *Data complexity impedes integration*: while urban data is inherently

 Equal contribution.

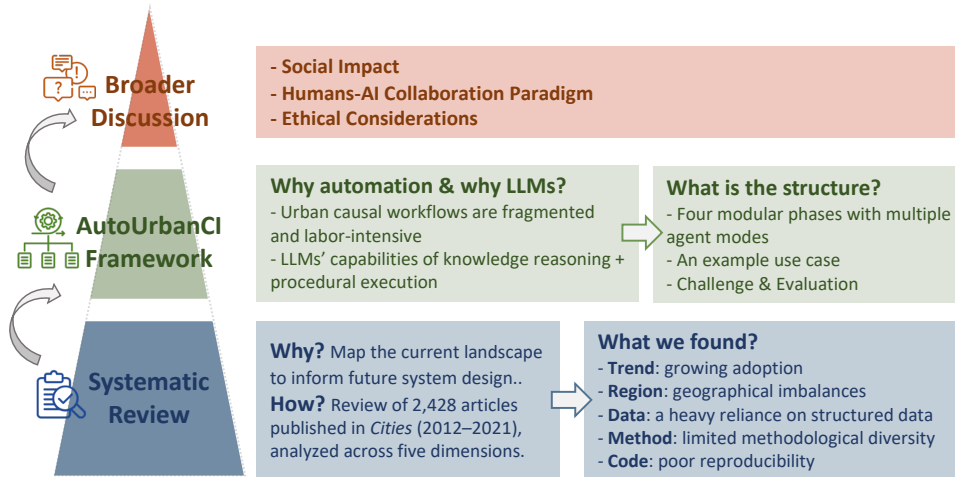


Figure 1: **Overview of the paper's structure and logic.** A layered structure from review to framework and broader discussion. Arrows indicate how insights from one stage inform the next.

multimodal (e.g., satellite imagery, mobility logs, public records), most studies rely on structured tabular data due to technical barriers, limiting the comprehensiveness of causal models (Raghavan et al., 2020; Hong et al., 2023); 3) *Experimentation is expensive and risk-prone*: causal inference depends on stringent assumptions, such as valid counterfactuals or exogenous variation, and many studies are abandoned when these conditions fail, discouraging exploration of high-risk, high-reward policy questions (Baum-Snow and Ferreira, 2015; Matthey and Glymour, 2022). The structural limitations of current urban causal research raise a timely question: *Can artificial intelligence help expand the boundaries of urban scientific discovery?*

Recent advances in Large Language Models (LLMs) (Achiam et al., 2023; Touvron et al., 2023; Team et al., 2023; Guo et al., 2025) and Multimodal Large Language Models (MLLMs) (Wu et al., 2023) offer a compelling opportunity. LLMs demonstrate strong capabilities in understanding and generating text (Radford et al., 2018), reasoning (Wei et al., 2022; Jaech et al., 2024), planning (Huang et al., 2022), code execution (Chen et al., 2021), and tool use (Schick et al., 2023; Qin et al., 2024). MLLMs extend these functions across diverse data modalities such as imagery (Liu et al., 2023), audio (Chu et al., 2023), graph (Tang et al., 2024), and structured charts (Han et al., 2023), lowering the barriers to engaging with complex urban data at scale (Liang et al., 2025). More recently, through automated hypothesis generation, integrated analysis of multimodal data, and adaptive causal study design, LLMs enable a shift from narrow, discipline-bound efforts to more inclusive and exploratory research (Lu et al., 2024; Schmidgall et al., 2025; Gottweis et al., 2025).

In this Perspective, we propose that **LLMs can transform urban science by offer not just a means to simply assist or accelerat existing workflows, but a way to expand its epistemic boundaries.** To explore this potential, we introduce **AutoUrbanCI**, an AI-powered framework for supporting causal inference in urban studies. **AutoUrbanCI** is a flexible, modular framework that supports the full urban causal pipeline—surfacing overlooked questions, assembling multimodal data, evaluating methodological assumptions, and generating interpretable outputs.

The outline of this paper are shown in Figure 1. Specifically, Section 2 presents a systematic review of urban causal research, identifying key gaps in data, methods, and geographic coverage. Section 3 introduces **AutoUrbanCI**, a modular agent-based framework that supports all stages of causal analysis, with a concrete multi-agent system use case. We also discuss potential challenges and propose evaluation methods. Section 4 reflects on how **AutoUrbanCI** enables broader participation from civic groups, governments, and urban communities, and offer a perspective on the human-AI collaboration paradigm. Finally, Section 5 summarizes the paper and outlines future directions. Our contributions are summarized as follows:

- **A Comprehensive Systematic Review.** We conduct a large-scale empirical analysis of causal inference studies in urban research, covering over 2,400 articles across a decade from a flagship

journal (i.e., *Cities*), identifying key trends and gaps in the use of causal inference.

- **A Modular Framework.** We introduce **AutoUrbanCI**, a flexible, AI-augmented pipeline that supports all stages of causal analysis through modular agents spanning hypothesis generation, data preparation, experimental execution, and report writing, demonstrated through a concrete multi-agent system use case.
- **A Multi-Dimensional Evaluation Protocol.** We examine methodological, ethical, and deployment challenges, and propose metrics for assessing the rigor, novelty, and generalizability of AI-generated causal research.
- **Towards Inclusive Urban Science.** We show how **AutoUrbanCI** reduces the entry barriers to rigorous urban causal analysis, allowing broader participation by civic organizations, municipal governments, and community groups - advancing the vision of a city “*created by everybody*” (Jacobs, 1961).

2 Landscape of Causal Inference in Urban Studies

This section provides a quantitative overview of the field based on a comprehensive empirical analysis. It identifies key trends in causal inference research across urban topics, data usage, methodological approaches, and geographic focus. These findings lay the foundation for designing **AutoUrbanCI**, our proposed AI framework for automated causal research, ensuring it is aligned with actual research needs, practices, and gaps.

2.1 Why a Systematic Review?

- **Mapping the current landscape to inform future design.** To develop an effective AI system for causal inference in urban research, it is critical to first understand how such research is currently conducted. Urban systems are inherently complex, characterized by dynamic, interlinked processes spanning infrastructure, policy, society, and environment. Identifying causal relationships within such systems is essential for evaluating the impact of interventions, but the methodological choices, data modalities, and research foci within this domain remain unevenly distributed and often under-documented.

2.2 How We Reviewed It?

- **Data Collection.** We conducted a systematic review of **2,428** peer-reviewed articles published in *Cities*, a leading journal in urban research, spanning a 10-year period from 2012 to 2021. The related publication trend of urban causal inference studies is shown in Figure 2. Using a pipeline combining state-of-the-art LLMs, i.e., GPT-4o-mini, GPT-4o, and GPT-4.5 (Jaech et al., 2024), and classical machine learning techniques, followed by expert human validation, we identified **219** articles that employed formal causal inference methodologies in their urban studies.

- **Analysis Procedure.** For each paper, we extracted metadata along five dimensions: Urban Topic (e.g., housing, transportation), Geographic Focus (i.e., continent and country), Specific Data Used (e.g., panel data, satellite imagery), Causal Methodology (i.e., method family and technique), and Reproducibility (i.e., availability of code and data). The results from the analysis are presented through visualizations in Figure 3 (i.e., distributions of the investigated dimensions).

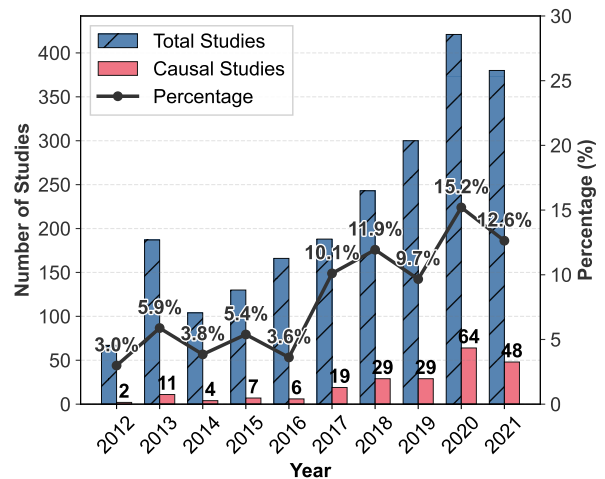


Figure 2: **Rising adoption of causal inference in urban research.** Trends in publication volume (blue bars) and causal inference usage (red bars) in *Cities* from 2012 to 2021. The dotted line marks the growing share of studies employing causal methods over time.

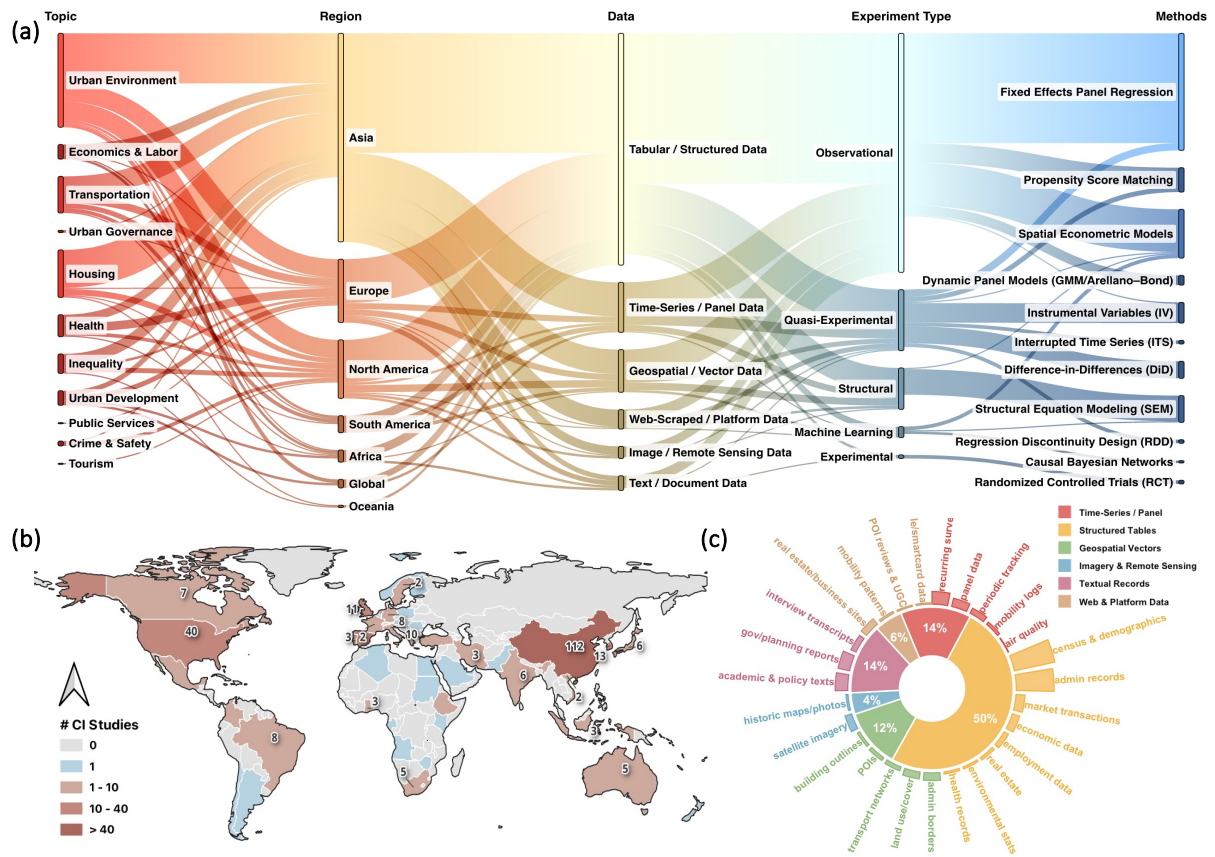


Figure 3: **Key gaps in urban causal inference research.** (a) Distribution of 219 studies across topics, regions, data types, experimental designs, and methods, revealing narrow topical coverage and methodological homogeneity. (b) Global disparities, with over 75% of studies from China, the United States, and Spain. (c) Limited use of multimodal data, with 64% of studies relying solely on structured tabular sources.

2.3 What We Found?

- **Key trends and empirical patterns.** Our systematic review reveals a field that is gaining momentum but remains uneven and constrained in several dimensions. While it has seen *growing adoption* over the past decade, it is still marked by *geographical imbalances*, a *heavy reliance on structured data*, *limited methodological diversity*, and *poor reproducibility*, detailed as follows.

- **A Growing Emphasis on Causal Research.** Causal inference has attracted increasing attention from urban science scholars over the past decade. As shown in Figure 2, in 2012, only 2 out of 67 studies (3.0%) in *Cities* used causal inference methods. By 2020, this proportion rose to 64 out of 421 studies (15.2%). From the growing trend shown in the figure, we can see a clear shift toward evidence-based evaluation in urban policy research.
- **Geographical Imbalances.** As indicated in Figure 3b, urban causal research is heavily concentrated in a few countries. The top three, China (112 studies), United States (40), and Spain (16), together account for over 75% of the total causal inference corpus. In contrast, entire regions such as Sub-Saharan Africa, South Asia, and Latin America remain significantly underrepresented. Even countries undergoing major urban transitions, such as India, Brazil, and South Africa, each have fewer than 10 studies. These imbalances raise concerns about the generalizability of findings and underscore the need for scalable solutions that lower entry barriers for underrepresented regions.
- **Overreliance on Structured Data.** The majority of studies rely on structured tabular datasets, including census records, economic indicators, and administrative databases. Based on our classification in Figure 3c, 64% of studies use structured data and time series panel data exclusively. Only 12% incorporate geospatial or vector data, 4% utilize image or remote sensing data, and 14% analyze textual or document-based data. This underutilization of multimodal data reflects analytical limitations, an area

where AI systems can offer significant advances.

- **Limited Methodological Diversity.** As shown in Figure 3a, methodological approaches are dominated by conventional econometric techniques. Among the 219 papers, 38.4% use Fixed Effects Panel Regression, 23.7% apply Difference-in-Differences (DiD), 17.4% use Instrumental Variables (IV), and 11.9% rely on Propensity Score Matching (PSM). In contrast, machine learning-based methods such as causal forests appear in fewer than 3% of studies. Bayesian models and structural equation modeling are similarly rare, despite their strengths in modeling latent and complex constructs.
- **Lack of Transparency and Reproducibility.** Among the 219 causal inference papers reviewed, **none** provided open access to their codebase, and fewer than 15% offered accessible data. This lack of transparency significantly hinders reproducibility and restricts opportunities for secondary analysis or AI-assisted meta-learning.

2.4 Insights from Empirical Landscape

The findings from our systematic review point to several critical directions for designing future AI-augmented systems for urban causal research. *First*, broader topical coverage is needed. Current studies are concentrated in a narrow set of urban domains, leaving governance, inequality, and service delivery underexplored. *Second*, systems should natively support diverse and unstructured data formats, such as geospatial vectors, imagery, and textual records, which are currently underutilized but essential for capturing complex urban phenomena. *Third*, the heavy reliance on conventional econometric models suggests a need for more flexible methodological toolkits that can adapt to data properties and research questions. *Fourth*, the lack of transparency and open access underscores the importance of embedding reproducibility and accountability into system design (e.g., generating logs, versioned outputs, and shareable code). *Finally*, geographic imbalances highlight the need for systems that lower technical entry barriers, enabling participation from data-scarce or underrepresented regions. These implications provide foundational guidance for future tools that seek to make urban causal inference more inclusive, transparent, and methodologically robust.

3 AutoUrbanCI framework

This section proposes **AutoUrbanCI**, a modular and flexible framework for urban causal inference. Specifically, we begin by identifying key barriers of current manual workflows (Figure 4, *left*) and then highlight the capabilities of LLMs/MLLMs that make automation feasible (Figure 4, *right*). Building on these two foundations, we introduce a modular, agent-based framework that structures the causal inference process into four components (Figure 4, *center*), each supported by different operational modes and LLM capabilities. We then present a concrete multi-agent use case to illustrate the system in action. Finally, we discuss key challenges and outline an evaluation strategy for **AutoUrbanCI**.

3.1 Motivation

Why automation is needed? Urban causal inference requires coordination across multiple stages, from defining questions to delivering policy-relevant insights. While our systematic review in Section 2 reveals increasing interest in causal methods, it also uncovers persistent limitations in current practice, i.e., overreliance on structured data, limited methodological diversity, and a lack of reproducibility. These issues stem in part from how each stage of the causal workflow is currently executed (Figure 4, *left*). In *Phase 1*, generating hypotheses often relies on subjective intuition or delayed academic cycles, making it difficult to identify timely and novel research questions. In *Phase 2*, assembling urban data is frequently repetitive and labor-intensive, requiring manual retrieval, cleaning, and integration of multi-source (e.g., traffic sensors, social media, and environmental data) multimodal (e.g., image, spatial time series, and text), multiresolution (e.g., different smallest units or time intervals) datasets (Zou et al., 2025; Zhang et al., 2024b). These processes are time-consuming and difficult to generalize across cities. *Phase 3* focuses on executing causal inference experiments. Here, researchers must not only select the most appropriate estimation strategy (e.g., PSM, DiD, or IV) but also ensure alignment with the assumptions and structure of the available data, which often demands substantial methodological expertise. Finally, in *Phase 4*,

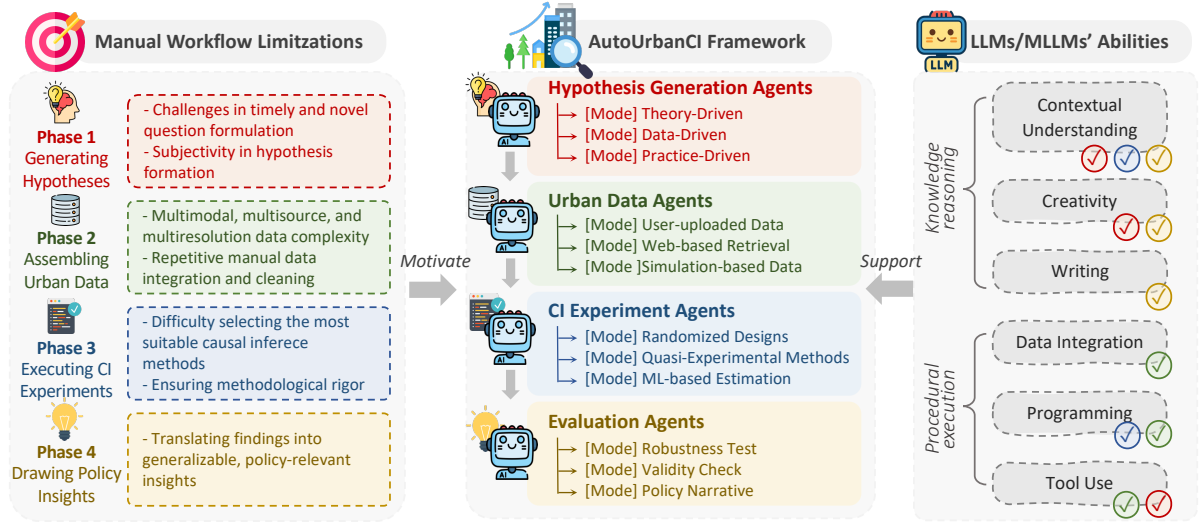


Figure 4: **From limitations to design: motivating the AutoUrbanCI framework.** The challenges of manual urban causal workflows (left), the modular design of **AutoUrbanCI** offering agents with multiple operational modes for each stage (middle), and the capabilities of LLMs/MLLMs that can support distinct stages, denoted by colored checkmarks (right).

drawing policy insights involves synthesizing findings into accessible narratives for decision-makers, often requiring interdisciplinary translation that is rarely systematized. These limitations motivate the need for a unified, modular framework that supports automation across all four phases while maintaining scientific rigor, flexibility, and interpretability.

What LLMs make possible? Recent advances in large language and multimodal models (LLMs and MLLMs) have introduced new possibilities for automating causal inference workflows in urban research. We organize their relevant capabilities into two core categories: *knowledge reasoning* and *procedural execution*, which correspond closely to the intellectual and operational demands of the **AutoUrbanCI** framework.

Knowledge reasoning encompasses the ability to interpret contextual information, generate novel ideas, and communicate structured findings. This includes semantic understanding of spatial, temporal, and causal concepts (Zhao et al., 2024; Zhang et al., 2024b), creative hypothesis formation from literature, data, or policy narratives (Si et al., 2024; Chakrabarty et al., 2024), and the capacity to articulate experimental insights into interpretable outputs such as research summaries or policy recommendations (Chia et al., 2024; Baek et al., 2024).

Procedural execution refers to the model’s capacity to interact with external tools and data ecosystems, generate executable code, and perform end-to-end causal workflows. LLMs and MLLMs can retrieve urban datasets via APIs (Yang et al., 2024b), align multimodal inputs (Gupta and Kembhavi, 2023), and implement causal estimation methods by synthesizing and running code across statistical and machine learning libraries (Qin et al., 2024; Li et al., 2023; Huang et al., 2024b).

These capabilities provide the foundation for the agents within **AutoUrbanCI**, enabling both cognitive support (e.g., hypothesis refinement, narrative construction) and operational automation (e.g., data acquisition, model execution) across the entire urban causal inference pipeline, as illustrated in the right portion of Figure 4.

3.2 Framework structure and agent modes

Motivated by the above-mentioned limitations and emerging LLM/MLLMs’ capabilities, we propose **AutoUrbanCI** —a modular framework that structures urban causal inference into functional phases, with LLM agents assigned scoped roles and distinct modes of interaction. As shown in Figure 4 (middle), **AutoUrbanCI** is a flexible framework composed of four functional phases. Note that each phase can be supported by one or more agents, and agents can also operate across multiple phases as needed. Instead

of a fixed pipeline, the framework provides a modular structure that adapts to varying data availability, task complexity, and automation needs. This flexibility allows **AutoUrbanCI** to support diverse use cases, including real-time policy decisions and data-scarce environments. The agent setup described here is one example; a concrete multi-agent instantiation is introduced in Section 3.3. We then describe each phase with different mode in detail below.

Hypothesis Generation Agents. The first phase of the causal workflow involves identifying meaningful and timely causal questions (i.e., hypothesis) rooted in urban phenomena. Traditionally, this step relies heavily on domain expertise, often guided by literature reviews or retrospective interpretations of policy outcomes—an approach that can introduce cognitive bias and limit scalability. To address this, **AutoUrbanCI** supports multiple operational modes, each tailored to different types of input sources for hypothesis generation.

- In the *theory-driven* mode, agents assist in refining or critiquing human-provided hypotheses by referencing academic literature and established theoretical frameworks.
- The *data-driven* mode identifies anomalies or shifts in sensor-based observations (e.g., spikes in traffic congestion or air pollution) that may point to candidate interventions or underlying causal mechanisms.
- The *practice-driven* mode draws inspiration for causal questions from real-world information sources, including policy documents, urban news feeds, and social media narratives, grounding hypotheses in ongoing societal dynamics.

These modes can be invoked independently or in combination, depending on the research objective and the nature of available inputs.

Urban Data Agents. The second phase focuses on constructing datasets for downstream causal experiments, often from multi-source, multi-modal, and multi-resolution urban data. To accommodate varying levels of data accessibility and completeness, agents in this phase may operate under three distinct modes.

- In the *user-uploaded data* mode, agents process datasets provided directly by researchers, handling resolution alignment and basic preprocessing. This mode is suitable when users bring domain-specific or proprietary data into the workflow.
- In the *web-based retrieval* mode, agents autonomously identify and collect relevant datasets from open data platforms, online repositories, or real-time APIs, guided by the variables required to test a given hypothesis. Examples of such sources include Google Street View (GSV)¹, OpenStreetMap (OSM)², and official government portals such as NYC Open Data³ and Singapore Open Data⁴.
- In the *simulation-based data* mode, agents generate synthetic data to fill the missing data to support counterfactual reasoning, robustness testing, and early-stage experimentation when real-world data are costly, sparse, or unavailable. Recent works leverage LLMs to simulate structured urban behaviors—such as generating vehicle trajectories from textual descriptions (Yang et al., 2025) or modeling human mobility using personas and routine profiles (Ju et al., 2025; Wang et al., 2024). These synthetic data environments can approximate real-world urban conditions, offering a flexible proxy for evaluating causal questions when actual interventions are infeasible.

CI Experiment Agents. Once the dataset has been prepared, agents in this phase carry out causal inference experiments to estimate the effects of candidate interventions. Depending on the structure of the data, the nature of the hypothesis, and the complexity of the treatment assignment, different estimation modes may be activated. In many cases, agents implement these experiments by generating executable code, typically in Python or R, tailored to the selected method, and then running the code to produce effect estimates. Commonly used libraries include DoWhy for end-to-end causal inference workflows (Sharma

¹<https://www.google.com/streetview>

²<https://www.openstreetmap.org>

³<https://opendata.cityofnewyork.us/>

⁴<https://data.gov.sg/>

and Kiciman, 2020), EconML for machine learning-based treatment effect estimation (Battocchi et al., 2019), and CausalML for uplift modeling and heterogeneous effect analysis (Chen et al., 2020).

- In the *randomized designs* mode, agents apply experimental frameworks such as RCTs (Hernan and Robins, 2020) or their approximations when random assignment is feasible, observed, or can be simulated.. In urban research, true randomization is rarely possible due to ethical, logistical, and political constraints. Thus, this mode is most often used in conjunction with simulation-based data generated in the previous phase. When treatment and control groups can be synthetically constructed, agents can estimate causal effects under strong identification assumptions.
- The *quasi-experimental methods* mode is suitable when natural or institutional variation can be leveraged as a source of exogenous treatment. Agents operating in this mode identify applicable designs such as DiD, PSM, IV, or SCM (Hernan and Robins, 2020), depending on the data structure and policy context.
- In the *ML-based estimation* mode, agents use data-driven models to estimate treatment effects in high-dimensional or heterogeneous settings. These may include causal forests (Ronco et al., 2023; Ito et al., 2024), deep neural networks for counterfactual inference (Shalit et al., 2017; Louizos et al., 2017; Shi et al., 2019), and their recent extensions to graph-structured data (Wein et al., 2021; Xia et al., 2023). This mode is well suited for settings with treatment effect heterogeneity or limited structural assumptions.

By supporting diverse estimation strategies and automating their execution, this phase enables agents to conduct causal inference across varied urban scenarios, from controlled interventions to observational settings.

Evaluation Agents. Following causal estimation, agents in this final phase perform critical evaluations of the experimental results and help translate them into actionable insights. Depending on the research context, this process can involve technical validation, interpretability enhancement, and policy communication.

- In the *Robustness Test* mode, agents assess the sensitivity of causal estimates to modeling choices, alternative specifications, and sample heterogeneity. This includes placebo tests (Eggers et al., 2024), falsification analyses, and subset re-estimation to verify whether observed effects persist under reasonable perturbations.
- The *Validity Check* mode focuses on evaluating identification assumptions and threats to internal or external validity. Agents may examine covariate balance, assess pre-treatment trends (e.g., in DiD settings), or conduct refutation tests to identify potential confounders and post-treatment bias (Hernan and Robins, 2020).
- In the *Policy Narrative* mode, agents assist in constructing interpretable summaries and decision-relevant narratives grounded in experimental findings. This includes generating textual explanations, translating results into human-readable formats, and mapping causal insights to policy goals and stakeholder concerns.

Together, these modes ensure that causal insights are not only statistically sound but also communicable and useful for real-world urban decision-making. Notably, we restate the **flexibility of agent coordination** across the framework. Each phase can be supported by one or more agents, and agents may operate across multiple phases as needed. The workflow is **not strictly linear**: for instance, an experiment agent may determine that an IV is required, prompting the data agent to identify a suitable instrument; or, if a PSM method is selected, the evaluation agent may test for parallel trends to confirm its validity. This modular and adaptive architecture enables agents to coordinate iteratively, refining the pipeline based on evolving task demands. We illustrate this flexibility in the following use case (Section 3.3).

3.3 Multi-agent system example

This section presents a concrete instantiation of **AutoUrbanCI** through a multi-agent system (MAS) example, illustrating how agents collaborate across the causal workflow in a realistic research scenario.

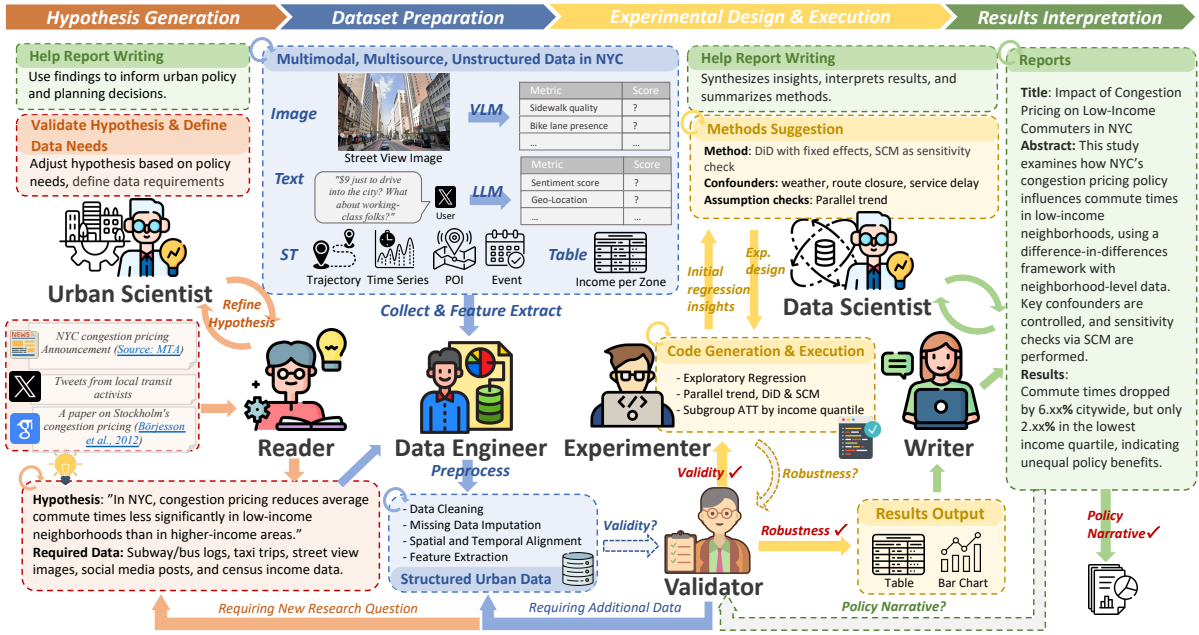


Figure 5: An example of the AutoUrbanCI system in practice. **Phase 1 Hypothesis Generation** : The Reader gathers policy news, social media posts, and academic papers, proposes a preliminary hypothesis, and refines it with the Urban Scientist while identifying the required data types. **Phase 2 Dataset Preparation** : The Data Engineer collects and preprocesses multimodal urban data. The Validator checks the validity of the resulting dataset. **Phase 3 Experimental Design & Execution** : The Experimenter runs exploratory regressions and conducts experiments under the design proposed by the Data Scientist. The Validator checks the robustness of the results. **Phase 4 Results Interpretation** : The Writer synthesizes results into a structured report in collaboration with the Data Scientist and Urban Scientist. The Validator checks the narrative alignment.

We focus on a case study investigating the impact of congestion pricing on low-income commuters in New York City (NYC), as shown in Figure 5. This example demonstrates one possible path through the framework: *Practice-Driven + Theory-Driven* → *Web-Based Retrieval* → *Quasi-Experimental Methods* → *Validity Check + Policy Narrative + Robustness Test*. The system includes seven specialized agents—Urban Scientist, Reader, Data Engineer, Validator, Data Scientist, Experimenter, and Writer—each responsible for a distinct function in the pipeline. Detailed roles and responsibilities are described in Appendix C.

Phase 1: Hypothesis Generation. This phase includes a continuous, two-stage process to identify emerging urban challenges and translate them into researchable questions. In this example, the system monitors public discourse surrounding NYC’s recently announced congestion pricing policy. A Reader agent continuously collects multimodal information from social media platforms (e.g., X), online news sources, and academic search engines. Examples include news headlines such as ‘New York to become first US city to have congestion charge’ (News, 2024), and social media posts expressing concerns like “\$9 just to drive into Manhattan? What about working-class folks?” These inputs are combined with academic literature retrieved from sources such as Google Scholar on prior congestion pricing implementations in cities like Stockholm (Chronopoulos, 2012; Börjesson et al., 2012). It proposes a preliminary hypothesis, which is then refined by the Urban Scientist through contextual knowledge of NYC’s transit systems and demographic structure. The final causal hypothesis states: “In NYC, congestion pricing reduces commute times more for higher-income commuters than for lower-income commuters, as the latter are more likely to be priced out of driving and forced to rely on public transit options.” Relevant data sources are also identified, including subway and bus logs, taxi trips, street view images, social media posts, and census-based income records.

Phase 2: Dataset Preparation. Once the hypothesis is defined and relevant data requirements are identified, the Data Engineer constructs a pipeline to collect, process, and integrate multimodal urban

data into a structured, analysis-ready dataset. This involves cross-domain web-based retrieval of spatio-temporal, visual, and textual data (Zou et al., 2025), spanning street view imagery, transit logs (subway, bus, taxi), social media posts, and census income records (Zhang et al., 2024b). To extract features from heterogeneous modalities, Vision-Language Models (VLMs) (Bordes et al., 2024) and the Segment Anything Model (SAM) (Kirillov et al., 2023) are applied to visual inputs, while models like LLMs assist in extracting semantic attributes from text. Geo-location information is obtained either from structured metadata (e.g., geo-tags) or through named entity recognition and geocoding techniques applied to textual content (Yan et al., 2024). Standard preprocessing steps—data cleaning, normalization, categorical encoding, and spatio-temporal alignment—ensure consistency across scales and formats.

The resulting dataset is evaluated by a Validator, which checks whether it satisfies core causal requirements such as temporal coverage, treatment/control group availability, and covariate completeness (Bailey et al., 2024). If conditions met, it proceeds to the next phase; otherwise the system initiates an iterative refinement process, updating the data pipeline or revisiting the hypothesis as needed.

Phase 3: Experimental Design & Execution. With a validated dataset, the Experimenter first conducts a preliminary regression analysis (e.g., OLS) to provide the Data Scientist with diagnostic insights on variable relevance and potential confounders. Guided by these results, the Data Scientist selects appropriate causal inference methods based on the data structure and hypothesis. For the NYC congestion pricing case, it adopts a DiD approach with fixed effects as the primary strategy, complemented by a SCM as a sensitivity check (Hernan and Robins, 2020). Key confounders, e.g., weather, route closures, and service delays, are specified, and assumptions like parallel pre-treatment trends will need to be tested. The Experimenter then implements the experimental design through code execution, including DiD and SCM estimation, subgroup analysis by income quantiles. The resulting outputs are reviewed by the Validator, who assesses the robustness (e.g., placebo tests (Eggers et al., 2024)). If the results satisfy statistical and causal validity criteria, the system proceeds generation of visualizations and summary tables to the next phase; otherwise, it reverts to earlier stages for refinement.

Phase 4: Results Interpretation. The Writer synthesizes outputs from the causal analysis in collaboration with the Urban Scientist and Data Scientist. The Data Scientist outlines methodological choices and limitations, while the Urban Scientist interprets effect sizes in the context of urban policy and equity. These perspectives are integrated into a structured report, combining visualizations, statistical justifications, and actionable insights to ensure policy relevance. The Validator then reviews the report’s narrative coherence and policy alignment. If approved, the system proceeds to the finalized reports; otherwise, earlier stages are revisited for refinement.

3.4 Challenges

We outline key challenges in realizing **AutoUrbanCI** as a scalable, policy-relevant system for causal analysis in urban environments.

Data Integration & Quality. The first challenge arises from the inherent complexity of urban data, which are multi-source, multi-granular, and multi-modal. Specifically, urban data originate from highly heterogeneous sources, including social media, satellite imagery, mobility logs, environmental sensors, and policy documents. These datasets differ not only in modality (e.g., text, images, time series, and tabular formats) but also in granularity, ranging from neighborhood-level attributes to real-time street-level observations (Zhang et al., 2024b; Zou et al., 2025). Integrating such data presents substantial challenges in preprocessing, normalization, and semantic alignment (Martínez-García and Hernández-Lemus, 2022; Liang et al., 2025). Recent work has explored using LLMs to construct urban knowledge graphs from unstructured data, as in UrbanKGent (Ning and Liu, 2024), which proposes an agent framework based on triplet extraction and spatio-temporal reasoning. While promising, such approaches remain at an early stage and require further development for robust, large-scale deployment.

Maintaining Consistency in Multi-Agent Interactions. MAS-based workflows often require agents to engage in multi-turn reasoning, where context from earlier stages (e.g., hypothesis generation) must persist throughout the pipeline. However, LLM-based agents frequently exhibit context drift, where key

Evaluation Type	Key Metrics	Evaluators	Representatives
Research Idea	Novelty, Excitement, Feasibility, Effectiveness	Human	Si et al. (2024)
	Significance, Clarity, Relevance, Originality, Feasibility	Human, LLM	ResearchAgent (2024)
	Novelty, Value, Surprise, Relevance	Human	CoQuest (2024)
Method Development	Clarity, Validity, Rigor, Innovativeness, Generalizability	Human, LLM	ResearchAgent (2024), MLR-Copilot (2024a)
Experiment Design	Clarity, Validity, Robustness, Feasibility, Reproducibility	Human, LLM	ResearchAgent (2024)
Experiment Execution	Performance Improvement, Success Rate	Prototype Code	MLR-Copilot (2024a)
Generated Paper	Experimental Quality, Report Quality, Usefulness NeurIPS-style Criteria	Human, LLM	Agent Laboratory (2025)
		Human, LLM	The AI Scientist (2024)
Results	Novelty, Impact	Human, LLM	AI co-scientist (2025)
Automated Reviewer	Accuracy, F1 Score, AUC, FPR, FNR	OpenReview Dataset (2022)	The AI Scientist (2024)
Overall System	Control, Creativity, Meta Creativity, Cognitive Load, Trust	Human	CoQuest (2024)
	Utility, Continuation, Satisfaction, Usability	Human	Agent Laboratory (2025)
	Cost (USD), Time (seconds), Success Rate	System Logs	Agent Laboratory (2025)
	Elo Rating	Human, LLM	AI co-scientist (2025)
	System’s Accuracy	GPQA Dataset (2024)	AI co-scientist (2025)
	Safety	Curated Adversarial Dataset	AI co-scientist (2025)

Table 1: **Overview of Evaluation Methods for Existing Autonomous LLM-Driven Research Works.** Summary of evaluation types, key metrics, evaluators, and representative examples across research-related LLM-based works and autonomous research frameworks.

information from earlier prompts is forgotten or ignored in later stages (Guo et al., 2024). This issue mirrors recent findings in multi-round simulations, where attention mechanisms fail to prioritize initial instructions as the context window expands (Yang et al., 2024a). Proposed solutions (Touvron et al., 2023) offer promising directions for improving long-range coherence. Still, systematically benchmarking and improving agent-level consistency in causal inference workflows remains an open challenge.

Aligning Agents with Domain-Specific Causal Frameworks. While **AutoUrbanCI** leverages LLM agents for flexible reasoning, these models are not inherently grounded in established causal methodologies. Without explicit constraints, agents may produce plausible-sounding but methodologically invalid conclusions, particularly in quasi-experimental designs that require strict adherence to identification assumptions. Moreover, imposing rigid workflow templates may limit adaptability to diverse research designs and non-standard causal frameworks (Schmidgall et al., 2025). Effective alignment may involve expert-annotated prompting pipelines (Wu et al., 2022) or fine-tuning on domain-specific corpora (Liang et al., 2025). Ensuring that **AutoUrbanCI** agents reason within valid identification strategies, rather than relying on free-form generation, is essential for producing trustworthy and reproducible policy insights.

3.5 Evaluation

Evaluating the expert-level capabilities of LLM-driven systems is inherently challenging (Si et al., 2024). The evaluation of **AutoUrbanCI** framework presents additional complexities, as it integrates multimodal data processing while maintaining the rigor required for causal inference experiments. Unlike general LLM-based automated research systems, which are primarily designed for machine learning tasks or scientific discovery in natural sciences, **AutoUrbanCI** introduces a novel paradigm tailored for urban causal research. This underscores the need to revisit the evaluation metrics for existing automated research systems, requiring evaluating their capacity to handle multimodal data, uphold the methodological rigor of causal inference, and ultimately generate meaningful causal insights that can inform urban policy and planning.

At present, evaluation in LLM-based research assistance or automated research encompasses a diverse range of quantitative and qualitative assessments, tailored to the specific tasks these systems perform. In Table 1, we present an organized overview of evaluation methods applied in autonomous LLM-driven systems, along with representative examples from recent studies. According to the overview of existing evaluation methods, LLM-driven systems are assessed not only on their ability to generate novel and feasible research ideas but also on their capacity to develop sound methodologies, design robust experiments, and execute research tasks effectively. These evaluations involve both human experts and automated systems or LLM-based reviewers, ensuring a balance between domain-specific judgment and scalable validation. For instance, research outputs (e.g., generated papers and reports), are scrutinized based on clarity, relevance, and scientific quality, often leveraging hybrid approaches that integrate peer review mechanisms with LLM-based assessments (Si et al., 2024; Baek et al., 2024; Schmidgall et al., 2025; Lu et al., 2024).

Beyond evaluating individual research components, assessing the overall system performance is crucial to ensuring the reliability and ethical deployment of LLM-driven research systems. This evaluation encompasses multiple dimensions, including usability, interpretability, computational cost, and ethical considerations (Liu et al., 2024; Schmidgall et al., 2025). In high-stakes decision-making contexts, particular emphasis is placed on safety to prevent potential misuse, such as dangerous research goals, dual-use risks, or misleading scientific claims (Gottweis et al., 2025). One effective approach to system evaluation is testing performance in structured problem settings, such as benchmark datasets (Berto, 2022; Lu et al., 2024) or curated adversarial datasets (Gottweis et al., 2025).

For **AutoUrbanCI**, in addition to the existing evaluation methods, its inherent nature requires several additional evaluation focuses, including *hypothesis generation significance*, *data processing quality*, and *causal inference validity*. First, for idea generation evaluation, in addition to novelty and feasibility, it should also consider scientific rigor (i.e., ensuring asking appropriately clear and specific research questions adheres to established causal principles (Bailey et al., 2024)) and interdisciplinary value (i.e., assessing whether they integrate insights from multiple domains, such as urban science, economics, and environmental studies, to provide innovative perspectives). Second, for data processing quality, its evaluation can focus on data completeness, consistency, preprocessing accuracy, scalability, and computational efficiency, ensuring robust, efficient, and effective multimodal data integration. Lastly, causal inference evaluation assesses causal structure feasibility, intervention validity, counterfactual consistency, and robustness to confounding. This can be achieved through synthetic data benchmarking, expert validation, or curated datasets derived from existing urban causal inference studies, ensuring that discovered causal insights are both statistically sound and practically relevant for urban policy applications.

4 Further Discussion

In this section, we reflect on the broader implications of automating urban causal workflows, organized around three key perspectives: social impact, the human-AI collaboration paradigm, and ethical considerations. An overview of these dimensions is illustrated in Figure 6.

4.1 Social Impact

The proposed framework has the potential to transform scientific inquiry, policymaking, and public engagement by making causal insights more accessible, scalable, and actionable, as detailed below.

- Assisting Urban Researchers. For urban researchers, **AutoUrbanCI** serves as a powerful assistant in accelerating and refining causal analysis. This allows researchers to focus on higher-level theoretical development and policy interpretations rather than labor-intensive preprocessing and computation. Moreover, **AutoUrbanCI** facilitates cross-city comparisons and large-scale causal experiments, enabling researchers to analyze urban dynamics across diverse spatial and temporal contexts. This can lead to more robust, generalizable findings that inform evidence-based urban policies and interdisciplinary research collaborations. Additionally, by standardizing causal inference workflows, **AutoUrbanCI** helps ensure reproducibility and transparency in urban studies, fostering a more rigorous and scalable approach to urban causal research.

- **Enhancing Evidence-Based Urban Policy.** **AutoUrbanCI** provides policymakers with real-time causal analysis, allowing them to evaluate the potential impact of urban policies before implementation. By reducing reliance on correlation-driven decision-making, this automation ensures that interventions, such as traffic regulations, housing policies, or environmental protections, are based on causal insights rather than speculation. This can lead to more effective, data-driven, and proactive governance, ultimately improving urban livability, sustainability, and resource allocation.

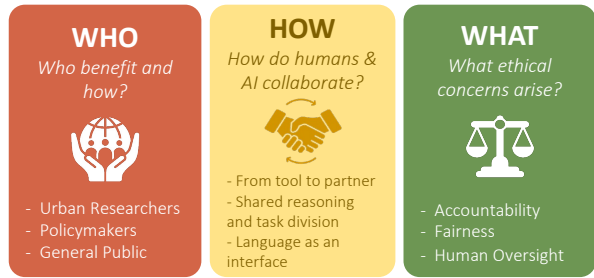


Figure 6: **Overview of key perspectives on further discussion..** Three dimensions that shape the broader societal implications of AI-supported causal workflows in urban studies: social impact (*who* benefits), human-AI collaboration paradigms (*how* they interact), and ethical considerations (*what* concerns arise).

- **Democratizing Urban Analytics.** In addition, **AutoUrbanCI** lowers the barriers for citizens, journalists, and grassroots organizations to explore urban issues without requiring deep technical expertise. This fosters greater civic engagement and public awareness of how cities function. Urban studies should not only seek to explain the city but also be accessible to the people who live in it —*because cities can only provide something for everybody when they are created by everybody* (Jacobs, 1961). This ensures that data-driven insights contribute to more inclusive and participatory urban decision-making (Fox and Wolf, 2024).

4.2 New Human-AI Collaboration Paradigm

- **From Tool to Collaborator.** Traditionally, AI systems have served as passive tools in urban research workflows, used for predictive modeling (Li et al., 2024b), spatial visualization (Zhang et al., 2024a), or data preprocessing (Liang et al., 2025). However, the introduction of **AutoUrbanCI** represents a shift toward a more collaborative paradigm. In this framework, AI agents are no longer limited to executing predefined tasks; instead, they actively participate in the scientific reasoning process. Rather than merely accelerating isolated stages of analysis, these agents engage in context-aware interactions that reflect an evolving role: *from tool to collaborator*. This shift invites deeper questions about how tasks and responsibilities are distributed across human-agent systems, detailed as below.

- **Division of Reasoning and Execution.** Moving beyond the traditional pipeline of human-led design, **AutoUrbanCI** embraces a configurable division of labor between humans and agents. Recent systems (Gottweis et al., 2025; Li et al., 2024a; Lu et al., 2024; Swanson et al., 2024) reveal a common design principle: human experts define goals, constraints, and evaluation criteria, while agents handle iterative generation, optimization, and evidence organization. In these systems, natural language interfaces serve as the medium for task specification, correction, and refinement, reinforcing the human’s role as an agenda-setter and critical reviewer. In **AutoUrbanCI**, this flexible structure allows agents to operate independently for routine tasks such as data preprocessing or method selection, while preserving human judgment for hypothesis formulation, identification strategy, and assumption checking. Multi-agent mechanisms such as self-critique and ranking (Lu et al., 2024) can further enhance robustness, but the final authority remains with human users, who validate outputs and determine their scientific and policy relevance. Rather than replacing human reasoning, this structure reinforces it: agents scaffold the causal workflow, while humans remain responsible for framing questions, defining standards, and interpreting outcomes in context.

- **Language as Interface for Scientific Interaction.** Language interfaces enable more flexible and inclusive forms of human-AI collaboration in scientific reasoning. Recent systems (Zhou et al., 2022; Swanson et al., 2024; Gottweis et al., 2025) demonstrate that researchers can use natural language to specify goals, refine hypotheses, and guide iterative experimentation without relying on formal task descriptions. This interaction model is especially valuable in urban causal research, where questions often involve loosely defined objectives and policy-relevant semantics. Through dialogic interfaces, users can engage in multi-round exchanges to clarify assumptions, compare methods, and request alternative

designs. These interactions support asymmetrical collaboration, bridging technical experts, planners, and policymakers, and allow human judgment to remain embedded throughout the workflow. Moreover, by lowering technical barriers, such interfaces expand participation to civic actors such as journalists and community organizations, making urban inquiry more accessible and democratic (Fox and Wolf, 2024). Language thus serves not only as an input modality, but as a reasoning interface, shaping how tasks are interpreted, decisions are justified, and causal insights are co-constructed.

- Toward a New Paradigm. Taken together, these shifts point toward a broader rethinking of how scientific inquiry is conducted. In **AutoUrbanCI**, causal analysis is no longer a static pipeline but a collaborative process, structured by agents, guided by human judgment, and mediated through language. As human and machine capabilities become increasingly entangled, urban research must move beyond automation toward shared reasoning systems that are adaptive, interpretable, and participatory.

4.3 Ethical Considerations

As AI agents take on active roles across the causal workflow, from hypothesis generation to policy-facing outputs, new ethical considerations arise around responsibility and transparency, fairness and bias, and the role of human oversight. *First*, when automated inferences inform public decisions, it is essential to clarify who is accountable for the assumptions, methods, and consequences. Human-in-the-loop designs can offer oversight, but they must be structured to avoid automation bias and ensure that AI-generated outputs remain contestable. Interpretability should enable not only technical auditing but also meaningful engagement by domain experts and affected communities. *Second*, urban datasets often encode structural inequities. If agents are trained on dominant narratives or skewed data, they may inadvertently reinforce existing biases. Systems like **AutoUrbanCI** must embed mechanisms for uncertainty disclosure, sensitivity analysis, and inclusive data practices to mitigate this risk. *Third*, as AI becomes more embedded in scientific workflows, it raises broader questions around authorship, attribution, and epistemic authority. Rather than replacing human researchers, **AutoUrbanCI** is designed to support more inclusive, rigorous, and reflexive forms of urban causal reasoning—where domain expertise, civic participation, and algorithmic assistance can co-exist productively.

5 Summary & the Road Ahead

Reimagining Urban Causal Inference. This Perspective highlights the untapped potential of LLMs to scale urban causal research. Urban causal research plays a vital role in evidence-based policymaking, yet current workflows are often labor-intensive, fragmented, and inaccessible. Our systematic review reveals five key gaps: geographic concentration, overreliance on structured data, limited methods, poor transparency, and slow causal adoption. To address these, we introduce **AutoUrbanCI**, a modular, LLM-powered framework that supports every stage of the causal pipeline, from hypothesis generation to evaluation, with an example use case. By structuring the process into discrete, automatable tasks, **AutoUrbanCI** shows how AI can help scale causal research while retaining scientific rigor.

Lowering Barriers, Broadening Participation. **AutoUrbanCI** is more than a tool. Instead, it is a step toward a more inclusive and participatory paradigm of urban inquiry. It lowers the technical threshold for causal analysis, enabling researchers, policymakers, and civic groups to explore timely urban questions with reduced dependence on coding, manual data handling, or advanced econometrics. In doing so, it fosters greater transparency, reproducibility, and responsiveness in how cities learn and adapt.

The Road Ahead. Moving forward, we envision three key directions for future work. First, we plan to develop a deployable prototype of **AutoUrbanCI** to validate its effectiveness in real-world causal research workflows. Second, we aim to refine agent capabilities, especially for handling unstructured and multimodal data and designing rigorous causal inference experiments. Third, we will explore broader deployment scenarios in collaboration with urban researchers and policymakers. We call for collective efforts across AI, urban studies, and broader quantitative social science communities to realize a more inclusive, scalable, and rigorous future for urban causal inference.

References

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.
- Jinheon Baek, Sujay Kumar Jauhar, Silviu Cucerzan, and Sung Ju Hwang. 2024. Researchagent: Iterative research idea generation over scientific literature with large language models. *arXiv preprint arXiv:2404.07738*.
- Drew H Bailey, Alexander J Jung, Adriene M Beltz, Markus I Eronen, Christian Gische, Ellen L Hamaker, Konrad P Kording, Catherine Lebel, Martin A Lindquist, Julia Moeller, et al. 2024. Causal inference on human behaviour. *Nature human behaviour*, 8(8):1448–1459.
- Julia Balla, Sihao Huang, Owen Dugan, Rumen Dangovski, and Marin Soljačić. 2025. Ai-assisted discovery of quantitative and formal models in social science. *Humanities and Social Sciences Communications*, 12(1):1–12.
- Keith Battocchi, Eleanor Dillon, Maggie Hei, Greg Lewis, Paul Oka, Miruna Oprescu, and Vasilis Syrgkanis. 2019. EconML: A Python Package for ML-Based Heterogeneous Treatment Effects Estimation. <https://github.com/pywhy/EconML>. Version 0.x.
- Michael Batty. 1997. The computable city. *International Planning Studies*, 2(2):155–173.
- Nathaniel Baum-Snow and Fernando Ferreira. 2015. Causal inference in urban and regional economics. In *Handbook of regional and urban economics*, volume 5, pages 3–68. Elsevier.
- David Bell and Mark Jayne. 2009. Small cities? towards a research agenda. *International journal of urban and regional research*, 33(3):683–699.
- Federico Berto. 2022. [Iclr2022 openreview data](#). Accessed: March 17, 2025.
- Nicholas Bloom, Ruobing Han, and James Liang. 2024. Hybrid working from home improves retention without damaging performance. *Nature*, pages 1–6.
- Daniil A Boiko, Robert MacKnight, Ben Kline, and Gabe Gomes. 2023. Autonomous chemical research with large language models. *Nature*, 624(7992):570–578.
- Florian Bordes, Richard Yuanzhe Pang, Anurag Ajay, Alexander C Li, Adrien Bardes, Suzanne Petryk, Oscar Mañas, Zhiqiu Lin, Anas Mahmoud, Bargav Jayaraman, et al. 2024. An introduction to vision-language modeling. *arXiv preprint arXiv:2405.17247*.
- Maria Börjesson, Jonas Eliasson, Muriel B Hugosson, and Karin Brundell-Freij. 2012. The stockholm congestion charges—5 years on. effects, acceptability and lessons learnt. *Transport Policy*, 20:1–12.
- Tuhin Chakrabarty, Philippe Laban, Divyansh Agarwal, Smaranda Muresan, and Chien-Sheng Wu. 2024. Art or artifice? large language models and the false promise of creativity. In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems*, pages 1–34.
- Huigang Chen, Totte Harinen, Jeong-Yoon Lee, Mike Yung, and Zhenyu Zhao. 2020. [Causalm1: Python package for causal machine learning](#). *Preprint*, arXiv:2002.11631.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde De Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. 2021. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*.
- Yew Ken Chia, Pengfei Hong, Lidong Bing, and Soujanya Poria. 2024. Instructeval: Towards holistic evaluation of instruction-tuned large language models. In *Proceedings of the First edition of the Workshop on the Scaling Behavior of Large Language Models (SCALE-LLM 2024)*, pages 35–64.
- Themis Chronopoulos. 2012. Congestion pricing: the political viability of a neoliberal spatial mobility proposal in london, stockholm, and new york city. *Urban Research & Practice*, 5(2):187–208.
- Yunfei Chu, Jin Xu, Xiaohuan Zhou, Qian Yang, Shiliang Zhang, Zhijie Yan, Chang Zhou, and Jingren Zhou. 2023. Qwen-audio: Advancing universal audio understanding via unified large-scale audio-language models. *arXiv preprint arXiv:2311.07919*.
- Andrew C Eggers, Guadalupe Tuñón, and Allan Dafoe. 2024. Placebo tests for causal inference. *American Journal of Political Science*, 68(3):1106–1121.

- Sean Fox and Levi John Wolf. 2024. People make places urban. *Nature Cities*, pages 1–8.
- Chaoyou Fu, Yuhan Dai, Yongdong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. 2024a. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. *arXiv preprint arXiv:2405.21075*.
- Chaoyou Fu, Yi-Fan Zhang, Shukang Yin, Bo Li, Xinyu Fang, Sirui Zhao, Haodong Duan, Xing Sun, Ziwei Liu, Liang Wang, et al. 2024b. Mme-survey: A comprehensive survey on evaluation of multimodal llms. *arXiv preprint arXiv:2411.15296*.
- Vinicius G Goecks and Nicholas R Waytowich. 2023. Disasterresponsegpt: Large language models for accelerated plan of action development in disaster response scenarios. *arXiv preprint arXiv:2306.17271*.
- Juraj Gottweis, Wei-Hung Weng, Alexander Daryin, Tao Tu, Anil Palepu, Petar Sirkovic, Artiom Myaskovsky, Felix Weissenberger, Keran Rong, Ryutaro Tanno, Khaled Saab, Dan Popovici, Jacob Blum, Fan Zhang, Katherine Chou, Avinatan Hassidim, Burak Gokturk, Amin Vahdat, Pushmeet Kohli, Yossi Matias, Andrew Carroll, Kavita Kulkarni, Nenad Tomasev, Yuan Guan, Vikram Dhillon, Eeshit Dhaval Vaishnav, Byron Lee, Tiago R D Costa, José R Penadés, Gary Peltz, Yunhan Xu, Annalisa Pawlosky, Alan Karthikesalingam, and Vivek Natarajan. 2025. *Towards an ai co-scientist*. *Preprint*, arXiv:2502.18864.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. 2025. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*.
- Jiaxian Guo, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Boyang Li, Dacheng Tao, and Steven Hoi. 2023. From images to textual prompts: Zero-shot visual question answering with frozen large language models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10867–10877.
- Taicheng Guo, Xiuying Chen, Yaqi Wang, Ruidi Chang, Shichao Pei, Nitesh V Chawla, Olaf Wiest, and Xiangliang Zhang. 2024. Large language model based multi-agents: a survey of progress and challenges. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence*, pages 8048–8057.
- Tanmay Gupta and Aniruddha Kembhavi. 2023. Visual programming: Compositional visual reasoning without training. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14953–14962.
- Yucheng Han, Chi Zhang, Xin Chen, Xu Yang, Zhibin Wang, Gang Yu, Bin Fu, and Hanwang Zhang. 2023. Chartllama: A multimodal llm for chart understanding and generation. *arXiv preprint arXiv:2311.16483*.
- M.A. Hernan and J.M. Robins. 2020. *Causal Inference: What If*. Chapman & Hall/CRC Monographs on Statistics & Applied Probab. CRC Press.
- Daniel F Heuermann and Johannes F Schmieder. 2019. The effect of infrastructure on worker mobility: evidence from high-speed rail expansion in germany. *Journal of economic geography*, 19(2):335–372.
- Andy Hong, Lucy Baker, Rafael Prieto Curiel, James Duminy, Bhawani Buswala, ChengHe Guan, and Divya Ravindranath. 2023. Reconciling big data and thick data to advance the new urban science and smart city governance. *Journal of Urban Affairs*, 45(10):1737–1761.
- Bin Huang, Xin Wang, Hong Chen, Zihan Song, and Wenwu Zhu. 2024a. Vtimellm: Empower llm to grasp video moments. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14271–14280.
- Qian Huang, Jian Vora, Percy Liang, and Jure Leskovec. 2024b. Mlagentbench: Evaluating language agents on machine learning experimentation. In *Forty-first International Conference on Machine Learning*.
- Wenlong Huang, Pieter Abbeel, Deepak Pathak, and Igor Mordatch. 2022. Language models as zero-shot planners: Extracting actionable knowledge for embodied agents. In *International conference on machine learning*, pages 9118–9147. PMLR.
- Tal Ifargan, Lukas Hafner, Maor Kern, Ori Alcalay, and Roy Kishony. 2025. Autonomous llm-driven research—from data to human-verifiable research papers. *NEJM AI*, 2(1):AIoa2400555.
- Koichi Ito, Prateek Bansal, and Filip Biljecki. 2024. Examining the causal impacts of the built environment on cycling activities using time-series street view imagery. *Transportation Research Part A: Policy and Practice*, 190:104286.
- Jane Jacobs. 1961. *The Death and Life of Great American Cities*. Random House, New York.

- Aaron Jaech, Adam Kalai, Adam Lerer, Adam Richardson, Ahmed El-Kishky, Aiden Low, Alec Helyar, Aleksander Madry, Alex Beutel, Alex Carney, et al. 2024. Openai o1 system card. *arXiv preprint arXiv:2412.16720*.
- Chenlu Ju, Jiaxin Liu, Shobhit Sinha, Hao Xue, and Flora Salim. 2025. Trajllm: A modular llm-enhanced agent-based framework for realistic human trajectory simulation. *arXiv preprint arXiv:2502.18712*.
- John Jumper, Richard Evans, Alexander Pritzel, Tim Green, Michael Figurnov, Olaf Ronneberger, Kathryn Tunyasuvunakool, Russ Bates, Augustin Žídek, Anna Potapenko, et al. 2021. Highly accurate protein structure prediction with alphafold. *nature*, 596(7873):583–589.
- Alexander Karaivanov, Dongwoo Kim, Shih En Lu, and Hitoshi Shigeoka. 2022. Covid-19 vaccination mandates and vaccine uptake. *Nature human behaviour*, 6(12):1615–1624.
- Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. 2023. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4015–4026.
- Jiayi Kuang, Ying Shen, Jingyou Xie, Hao hao Luo, Zhe Xu, Ronghao Li, Yinghui Li, Xianfeng Cheng, Xika Lin, and Yu Han. 2024. Natural language understanding and inference with mllm in visual question answering: A survey. *ACM Computing Surveys*.
- Raymond Li, Loubna Ben Allal, Yangtian Zi, Niklas Muennighoff, Denis Kocetkov, Chenghao Mou, Marc Marone, Christopher Akiki, Jia Li, Jenny Chim, et al. 2023. Starcoder: may the source be with you! *Trans. Mach. Learn. Res.*
- Ruochen Li, Teerth Patel, Qingyun Wang, and Xinya Du. 2024a. Mlr-copilot: Autonomous machine learning research based on large language models agents. *arXiv preprint arXiv:2408.14033*.
- Zhonghang Li, Lianghao Xia, Jiabin Tang, Yong Xu, Lei Shi, Long Xia, Dawei Yin, and Chao Huang. 2024b. Urbangpt: Spatio-temporal large language models. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pages 5351–5362.
- Weixin Liang, Yuhui Zhang, Hancheng Cao, Binglu Wang, Daisy Yi Ding, Xinyu Yang, Kailas Vodrahalli, Siyu He, Daniel Scott Smith, Yian Yin, et al. 2024. Can large language models provide useful feedback on research papers? a large-scale empirical analysis. *NEJM AI*, 1(8):AIoa2400196.
- Yuxuan Liang, Haomin Wen, Yutong Xia, Ming Jin, Bin Yang, Flora Salim, Qingsong Wen, Shirui Pan, and Gao Cong. 2025. Foundation models for spatio-temporal data science: A tutorial and survey. *arXiv preprint arXiv:2503.13502*.
- Yatang Lin, Yu Qin, Jing Wu, and Mandi Xu. 2021. Impact of high-speed rail on road traffic and greenhouse gas emissions. *Nature Climate Change*, 11(11):952–957.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2023. Visual instruction tuning. *Advances in neural information processing systems*, 36:34892–34916.
- Yiren Liu, Si Chen, Haocong Cheng, Mengxia Yu, Xiao Ran, Andrew Mo, Yiliu Tang, and Yun Huang. 2024. How ai processing delays foster creativity: Exploring research question co-creation with an llm-based agent. In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems*, pages 1–25.
- Christos Louizos, Uri Shalit, Joris M Mooij, David Sontag, Richard Zemel, and Max Welling. 2017. Causal effect inference with deep latent-variable models. *Advances in neural information processing systems*, 30.
- Chris Lu, Cong Lu, Robert Tjarko Lange, Jakob Foerster, Jeff Clune, and David Ha. 2024. The ai scientist: Towards fully automated open-ended scientific discovery. *arXiv preprint arXiv:2408.06292*.
- Benjamin S Manning, Kehang Zhu, and John J Horton. 2024. Automated social science: Language models as scientist and subjects. Technical report, National Bureau of Economic Research.
- Mireya Martínez-García and Enrique Hernández-Lemus. 2022. Data integration challenges for machine learning in precision medicine. *Frontiers in medicine*, 8:784455.
- Ellicott C Matthey and M Maria Glymour. 2022. Causal inference challenges and new directions for epidemiologic research on the health effects of social policies. *Current Epidemiology Reports*, 9(1):22–37.
- Martin Müller, Quentin Rihoux, and Laura Neville. 2025. Toward change in the uneven geographies of urban knowledge production. *Nature Cities*, pages 1–12.

- BBC News. 2024. New york to become first us city to have congestion charge. <https://www.bbc.com/news/articles/cvgk5pew592o>. Accessed: 2025-04-13.
- Yansong Ning and Hao Liu. 2024. Urbankgent: A unified large language model agent framework for urban knowledge graph construction. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*.
- Jinghua Piao, Zhihong Lu, Chen Gao, Fengli Xu, Fernando P Santos, Yong Li, and James Evans. 2025a. Emergence of human-like polarization among large language model agents. *arXiv preprint arXiv:2501.05171*.
- Jinghua Piao, Yuwei Yan, Jun Zhang, Nian Li, Junbo Yan, Xiaochong Lan, Zhihong Lu, Zhiheng Zheng, Jing Yi Wang, Di Zhou, et al. 2025b. Agentsociety: Large-scale simulation of llm-driven generative agents advances understanding of human behaviors and society. *arXiv preprint arXiv:2502.08691*.
- Yujia Qin, Shihao Liang, Yining Ye, Kunlun Zhu, Lan Yan, Yaxi Lu, Yankai Lin, Xin Cong, Xiangru Tang, Bill Qian, et al. 2024. Toolllm: Facilitating large language models to master 16000+ real-world apis. In *The Twelfth International Conference on Learning Representations*.
- Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. 2018. Improving language understanding by generative pre-training.
- Subashini Raghavan, Boung Yew Lau Simon, Ying Loong Lee, Wei Lun Tan, and Keh Kim Kee. 2020. Data integration for smart cities: opportunities and challenges. *Computational Science and Technology: 6th ICCST 2019, Kota Kinabalu, Malaysia, 29-30 August 2019*, pages 393–403.
- David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R Bowman. 2024. Gpqa: A graduate-level google-proof q&a benchmark. In *First Conference on Language Modeling*.
- Hannah Ritchie, Veronika Samborska, and Max Roser. 2024. Urbanization. *Our World in Data*. <https://ourworldindata.org/urbanization>.
- Michele Ronco, José María Tárraga, Jordi Muñoz, María Piles, Eva Sevillano Marco, Qiang Wang, Maria Teresa Miranda Espinosa, Sylvain Ponsérre, and Gustau Camps-Valls. 2023. Exploring interactions between socioeconomic context and natural hazards on human population displacement. *Nature Communications*, 14(1):8004.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. 2023. Toolformer: Language models can teach themselves to use tools. *Advances in Neural Information Processing Systems*, 36:68539–68551.
- Samuel Schmidgall, Yusheng Su, Ze Wang, Ximeng Sun, Jialian Wu, Xiaodong Yu, Jiang Liu, Zicheng Liu, and Emad Barsoum. 2025. Agent laboratory: Using llm agents as research assistants. *arXiv preprint arXiv:2501.04227*.
- Uri Shalit, Fredrik D Johansson, and David Sontag. 2017. Estimating individual treatment effect: generalization bounds and algorithms. In *International conference on machine learning*, pages 3076–3085. PMLR.
- Amit Sharma and Emre Kiciman. 2020. Dowhy: An end-to-end library for causal inference.
- Claudia Shi, David Blei, and Victor Veitch. 2019. Adapting neural networks for the estimation of treatment effects. *Advances in neural information processing systems*, 32.
- Chenglei Si, Diyi Yang, and Tatsunori Hashimoto. 2024. Can llms generate novel research ideas? a large-scale human study with 100+ nlp researchers. *arXiv preprint arXiv:2409.04109*.
- Michael D Skarlinski, Sam Cox, Jon M Laurent, James D Braza, Michaela Hinks, Michael J Hammerling, Manvitha Ponnampati, Samuel G Rodrigues, and Andrew D White. 2024. Language agents achieve superhuman synthesis of scientific knowledge. *arXiv preprint arXiv:2409.13740*.
- Kyle Swanson, Wesley Wu, Nash L Bulaong, John E Pak, and James Zou. 2024. The virtual lab: Ai agents design new sars-cov-2 nanobodies with experimental validation. *bioRxiv*, pages 2024–11.
- Jiabin Tang, Yuhao Yang, Wei Wei, Lei Shi, Lixin Su, Suqi Cheng, Dawei Yin, and Chao Huang. 2024. Graphgpt: Graph instruction tuning for large language models. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 491–500.

- Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, Katie Millican, et al. 2023. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- United Nations. 2015. [Goal 11: Make cities and human settlements inclusive, safe, resilient and sustainable](#). Accessed: 2025-04-12.
- A Vaswani. 2017. Attention is all you need. *Advances in Neural Information Processing Systems*.
- Jianghao Wang, Yichun Fan, Juan Palacios, Yuchen Chai, Nicolas Guetta-Jeanrenaud, Nick Obradovich, Chenghu Zhou, and Siqi Zheng. 2022. Global evidence of expressed sentiment alterations during the covid-19 pandemic. *Nature Human Behaviour*, 6(3):349–358.
- Jiawei Wang, Renhe Jiang, Chuang Yang, Zengqing Wu, Makoto Onizuka, Ryosuke Shibasaki, Noboru Koshizuka, and Chuan Xiao. 2024. Large language models as urban residents: An llm agent framework for personal mobility generation. *Advances in Neural Information Processing Systems*, 37:124547–124574.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837.
- Simon Wein, Wilhelm M Malloni, Ana Maria Tomé, Sebastian M Frank, G-I Henze, Stefan Wüst, Mark W Greenlee, and Elmar W Lang. 2021. A graph neural network framework for causal inference in brain networks. *Scientific reports*, 11(1):8061.
- Jiayang Wu, Wensheng Gan, Zefeng Chen, Shicheng Wan, and S Yu Philip. 2023. Multimodal large language models: A survey. In *2023 IEEE International Conference on Big Data (BigData)*, pages 2247–2256. IEEE.
- Tongshuang Wu, Ellen Jiang, Aaron Donsbach, Jeff Gray, Alejandra Molina, Michael Terry, and Carrie J Cai. 2022. Promptchainer: Chaining large language model prompts through visual programming. In *CHI Conference on Human Factors in Computing Systems Extended Abstracts*, pages 1–10.
- Yutong Xia, Huanfa Chen, Chengchao Zuo, and Nan Zhang. 2022. The impact of traffic on equality of urban healthcare service accessibility: A case study in wuhan, china. *Sustainable Cities and Society*, 86:104130.
- Yutong Xia, Yuxuan Liang, Haomin Wen, Xu Liu, Kun Wang, Zhengyang Zhou, and Roger Zimmermann. 2023. Deciphering spatio-temporal graph forecasting: A causal lens and treatment. *Advances in Neural Information Processing Systems*, 36:37068–37088.
- Yibo Yan, Shen Wang, Jiahao Huo, Jingheng Ye, Zhendong Chu, Xuming Hu, Philip S Yu, Carla Gomes, Bart Selman, and Qingsong Wen. 2025. Position: Multimodal large language models can significantly advance scientific reasoning. *arXiv preprint arXiv:2502.02871*.
- Yibo Yan, Haomin Wen, Siru Zhong, Wei Chen, Haodong Chen, Qingsong Wen, Roger Zimmermann, and Yuxuan Liang. 2024. Urbanclip: Learning text-enhanced urban region profiling with contrastive language-image pretraining from the web. In *Proceedings of the ACM on Web Conference 2024*, pages 4006–4017.
- Diya Yang, Caleb Ziems, William Held, Omar Shaikh, Michael S Bernstein, and John Mitchell. 2024a. Social skill training with large language models. *arXiv preprint arXiv:2404.04204*.
- Kairui Yang, Zihao Guo, Gengjie Lin, Haotian Dong, Zhao Huang, Yipeng Wu, Die Zuo, Jibin Peng, Ziyuan Zhong, Xin WANG, Qing Guo, Xiaosong Jia, Junchi Yan, and Di Lin. 2025. Trajectory-llm: A language-based data generator for trajectory prediction in autonomous driving. In *ICLR*.
- Linyao Yang, Hongyang Chen, Zhao Li, Xiao Ding, and Xindong Wu. 2024b. Give us the facts: Enhancing large language models with knowledge graphs for fact-aware language modeling. *IEEE Transactions on Knowledge and Data Engineering*, 36(7):3091–3110.
- Siyao Zhang, Daocheng Fu, Wenzhe Liang, Zhao Zhang, Bin Yu, Pinlong Cai, and Baozhen Yao. 2024a. Trafficgpt: Viewing, processing and interacting with traffic foundation models. *Transport Policy*, 150:95–105.
- Weijia Zhang, Jindong Han, Zhao Xu, Hang Ni, Hao Liu, and Hui Xiong. 2024b. Towards urban general intelligence: A review and outlook of urban foundation models. *arXiv preprint arXiv:2402.01749*.

- Weijia Zhang, Jindong Han, Zhao Xu, Hang Ni, Hao Liu, and Hui Xiong. 2024c. Urban foundation models: A survey. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pages 6633–6643.
- Zheng Zhao, Emilio Monti, Jens Lehmann, and Haytham Assem. 2024. Enhancing contextual understanding in large language models through contrastive decoding. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 4225–4237.
- Yunhan Zheng, David R Keith, Shenhao Wang, Mi Diao, and Jinhua Zhao. 2024a. Effects of electric vehicle charging stations on the economic vitality of local businesses. *Nature Communications*, 15(1):7437.
- Yunhan Zheng, Shenhao Wang, Lun Liu, Jim Aloisi, and Jinhua Zhao. 2024b. Impacts of remote work on vehicle miles traveled and transit ridership in the usa. *Nature Cities*, pages 1–13.
- Denny Zhou, Nathanael Schärli, Le Hou, Jason Wei, Nathan Scales, Xuezhi Wang, Dale Schuurmans, Claire Cui, Olivier Bousquet, Quoc Le, et al. 2022. Least-to-most prompting enables complex reasoning in large language models. *arXiv preprint arXiv:2205.10625*.
- Xingchen Zou, Yibo Yan, Xixuan Hao, Yuehong Hu, Haomin Wen, Erdong Liu, Junbo Zhang, Yong Li, Tianrui Li, Yu Zheng, et al. 2025. Deep learning for cross-domain data fusion in urban computing: Taxonomy, advances, and outlook. *Information Fusion*, 113:102606.

A Related Works

A.1 Urban Causal Research

Urban causal research aims to identify the effects of treatments, policies, and interventions on outcome variables (Baum-Snow and Ferreira, 2015), which is crucial for evidence-based policymaking in areas such as transportation, housing, environmental sustainability, and economic development (Baum-Snow and Ferreira, 2015; Bailey et al., 2024). Causal inference methods (Hernan and Robins, 2020) thus have become indispensable tools in urban research, enabling more rigorous and data-driven policy evaluations or urban phenomenon analysis.

Randomized Controlled Trials (RCTs) are one of the commonly-used approaches for causal inference, effectively eliminating bias through random assignment. For example, Bloom et al. (2024) employ RCTs to evaluate the impact of hybrid work-from-home policies on employee retention. However, RCTs are often impractical in urban research due to ethical, logistical, and spatial constraints. As a result, researchers rely more on quasi-experimental methods to infer causal relationships from observational data. One widely used approach is Difference-in-Differences (DID), which compares outcome changes between treated and control groups over time. This method has been applied to assess the impact of high-speed rail on traffic emissions, micromobility regulations on travel behavior, and vaccine mandates on public health (Lin et al., 2021). Another key method is the Synthetic Control Method (SCM), which constructs a synthetic control unit as a weighted combination of untreated units that closely resemble the treated unit before intervention. SCM has been employed to evaluate the effects of COVID-19 lockdown policies on public sentiment and economic activity (Wang et al., 2022). To address endogeneity issues, Instrumental Variable (IV) methods use external instruments that influence treatment but not the outcome directly. For example, Zheng et al. (2024b) have leveraged the proportion of remote-capable workers to examine the impact of remote work on vehicle miles traveled and transit ridership. In addition, Propensity Score Matching (PSM) is used to reduce selection bias by creating comparable groups based on observable characteristics, and has been applied to evaluate the economic effects of electric vehicle charging stations (Zheng et al., 2024a). Recently, with the advancement of Machine Learning (ML), ML-based causal inference methods, such as causal forests (Ronco et al., 2023; Ito et al., 2024), have also gained popularity. In addition, deep neural networks for counterfactual inference (Shalit et al., 2017; Louizos et al., 2017; Shi et al., 2019), along with their recent extensions to graph-structured data (Wein et al., 2021), have further expanded the toolkit for learning complex causal effects in high-dimensional settings.

However, conducting robust urban causal research requires integrating domain expertise, high-quality data, and rigorous methodologies, making it a non-trivial task. From the data perspective, the high-volume, multi-source, and multi-modal nature of urban data demands extensive and repetitive human effort for data collection and pre-processing, reducing efficiency. In addition, causal methods rely heavily on subjective decisions in hypothesis formulation, variable selection, and methodological choices, which can introduce biases, overlook critical variables, and limit reproducibility.

A.2 Multimodal Large Language Models

Large Language Models (LLMs) (Achiam et al., 2023; Touvron et al., 2023; Team et al., 2023; Guo et al., 2025) have recently emerged as powerful tools that process and generate human-like text by leveraging vast data and transformer-based architectures (Vaswani, 2017). Multimodal Large Language Models (MLLMs) extend the capabilities of LLMs by integrating and processing multiple data modalities, including text, images, audio, and structured data (Wu et al., 2023). Unlike conventional LLMs, which primarily rely on textual inputs, MLLMs leverage cross-modal reasoning to enhance understanding and decision-making in complex tasks. In other words, MLLMs can be recognized as “universal translators” that bridge language and sensory inputs. Most MLLMs consist of three core components: a *modality encoder* that extracts features from non-text inputs, an *LLM module* that processes information, and a *projector* that aligns embeddings between different modalities (Fu et al., 2024b). These models generate responses in an autoregressive manner, incorporating both textual and non-textual cues.

MLLMs have shown strong performance in tasks such as video captioning (Huang et al., 2024a; Fu

et al., 2024a) and Visual Question Answering (VQA) (Guo et al., 2023; Kuang et al., 2024). In the context of urban studies, MLLMs offer the potential to analyze multimodal urban data (satellite images, traffic sensors, social media), facilitating a more holistic understanding of urban dynamics (Zhang et al., 2024c). For example, UrbanCLIP (Yan et al., 2024) aligns satellite images with textual descriptors to profile a certain urban region. In transportation, real-time traffic data combined with social media mentions of a concert allows systems such as TrafficGPT (Zhang et al., 2024a) to diagnose congestion triggers and optimize routing. For disaster resilience, DisasterResponseGPT (Goecks and Waytowich, 2023) dynamically generates emergency plans by contextualizing real-time data against crisis protocols.

A.3 AI for Scientific Discovery

Recent advancements in AI have driven a paradigm shift in scientific discovery. Specifically, AI has demonstrated its potential in scientific breakthroughs, such as AlphaFold 2 (Jumper et al., 2021) in protein structure prediction, advancing drug discovery and materials science. Beyond specialized models, recent efforts integrate LLMs into the entire research workflow, from hypothesis generation to manuscript writing. Studies suggest LLM-generated feedback can be as effective as human peer reviews (Liang et al., 2024). Several AI-driven systems aim to assist in different stages of scientific research: PaperQA (Skarlinski et al., 2024) aids literature search, while HypoGeniC (Zhou et al., 2022) facilitates hypothesis generation through iterative refinement and platforms like data-to-paper (Ifargan et al., 2025) and Virtual Lab (Swanson et al., 2024) employ LLM-based agents to automate research paper writing and experimental design. Multi-agent systems like Coscientist (Boiko et al., 2023) and The AI Scientist (Lu et al., 2024) extend this paradigm by autonomously handling hypothesis formulation, experimental execution, and research documentation. Recently, the AI co-scientist (Gottweis et al., 2025), a multi-agent system built on Gemini 2.0, demonstrated its potential in drug repurposing, novel target discovery, and bacterial evolution.

Though promising, most AI-driven scientific discovery primarily focused on natural science (Yan et al., 2025); its application to social science research remains in its early stages. Unlike the physical and life sciences, where AI can generate and validate hypotheses through controlled experiments, social science research involves complex, evolving human behaviors that are harder to formalize and test empirically. Recent efforts have begun addressing this gap. AI-assisted frameworks have been developed to uncover quantitative and symbolic models, bridging parametric and non-parametric approaches (Balla et al., 2025). Manning et al. (2024) leverages structural causal models, where LLMs autonomously generate and test social science hypotheses through in silico experiments. Additionally, LLMs have been applied to social skill training and human-AI interaction, demonstrating potential in communication research and behavioral science (Yang et al., 2024a). More recently, LLM-driven simulations model human behavior and societal dynamics, enabling controlled studies on polarization, misinformation, and economic policies (Piao et al., 2025b,a). However, AI-driven discovery in urban causal research remains largely unexplored.

B Formulations

B.1 Causal Inference Problem

In a fundamental causal inference problem, the objective is to estimate the causal relationship between a set of treatment variables T and an outcome y . For each observation i , the data generation process of outcome y_i can be denoted as follows (Baum-Snow and Ferreira, 2015)

$$y_i = T_i\beta_i + X_i\delta_i + U_i + e_i, \quad (1)$$

where y_i represents the observed outcome for unit i , influenced by a treatment variable T_i , a set of observed control variables X_i , unobserved confounders U_i , and a stochastic error term e_i . The coefficients β_i and δ_i capture the respective effects of the treatment and control variables on the outcome. In the context of urban studies, the outcome variable y_i can represent an urban phenomenon, e.g., air pollution levels, traffic congestion, housing prices at a given location i . The treatment variable T_i typically corresponds to an urban policy intervention or infrastructure change, such as the implementation of congestion pricing, new public transit infrastructure, or zoning regulation modifications.

Symbol	Description
$\mathbf{x} = (x_1, x_2, \dots, x_t)$	Input sequence of textual tokens
x_t	Token at time step t
$\mathbf{x}_{<t}$	Sequence of tokens preceding time step t
\mathbf{h}_t	Hidden state of the LLM at step t
\mathbf{W}	Weight matrix mapping hidden states to token logits
\mathbf{e}_V	Embeddings from non-text modalities (e.g., images, audio)
\mathbf{e}_T	Textual input embeddings
$\mathbf{y} = (y_1, y_2, \dots, y_L)$	Generated output token sequence of length L
$p(x_t \mid \mathbf{x}_{<t}; \theta)$	Conditional probability of token x_t given history
$P(y_t \mid \mathbf{y}_{<t}, \mathbf{e}_V, \mathbf{e}_T)$	Conditional probability of multimodal token generation

Table 2: **Notation.** Notation used for LLMs and MLLMs formulation.

The primary objective is to estimate β_i , which quantifies the causal effect of the treatment on the outcome while controlling for confounders X_i . Various econometric and statistical methods can be employed to estimate these coefficients, including but not limited to Ordinary Least Squares (OLS) for simple regression-based analysis, Difference-in-Differences (DiD) for policy impact evaluation, Propensity Score Matching (PSM) for balancing covariates, Instrumental Variables (IV) to address endogeneity, and Synthetic Control Methods (SCM) for counterfactual estimation.

B.2 LLMs & MLLMs

Large Language Models (LLMs) (Achiam et al., 2023; Touvron et al., 2023; Team et al., 2023; Guo et al., 2025) are trained on large-scale text corpora to predict token sequences in an autoregressive manner. Given a sequence of tokens $\mathbf{x} = (x_1, x_2, \dots, x_t)$, an LLM models the conditional probability of the next token as:

$$p(x_t \mid \mathbf{x}_{<t}; \theta) = \text{softmax}(\mathbf{W} \cdot \mathbf{h}_t), \quad (2)$$

where \mathbf{h}_t denotes the hidden state at time step t , and \mathbf{W} is the learned weight matrix mapping hidden states to token logits. The model generates text by sampling iteratively from this distribution.

Multimodal Large Language Models (MLLMs) extend this paradigm by incorporating additional modalities, e.g., imagery (Liu et al., 2023; Yan et al., 2024), audio (Chu et al., 2023), graph (Tang et al., 2024), and structured charts (Han et al., 2023), alongside text. These non-text inputs are embedded into a shared representation space as \mathbf{e}_V , while the textual prompt is embedded as \mathbf{e}_T . The MLLM then generates output tokens $\mathbf{y} = (y_1, y_2, \dots, y_L)$ according to:

$$p(\mathbf{y} \mid \mathbf{e}_V, \mathbf{e}_T) = \prod_{t=1}^L P(y_t \mid \mathbf{y}_{<t}, \mathbf{e}_V, \mathbf{e}_T), \quad (3)$$

where $\mathbf{y}_{<t}$ denotes previously generated tokens.

By integrating multimodal contexts, MLLMs significantly expand the capabilities of LLMs—enabling tasks such as image captioning, visual question answering, and multimodal reasoning that are beyond the scope of text-only models.

C Roles and Functions of Agents in the Example Use Case

This section outlines the roles and responsibilities of each agent involved in the NYC congestion pricing use case illustrated in Figure 5.

- **Reader.** Continuously gathers multimodal information from external sources (e.g., policy announcements, social media, academic papers) to identify emerging issues and formulate preliminary hypotheses.
- **Urban Scientist.** Refines hypotheses by incorporating domain expertise (e.g., local infrastructure, demographics, governance context) and evaluates their feasibility and policy relevance to ensure that

the research question is well-scoped and actionable. It also suggests relevant data variables required for investigation.

- **Data Engineer.** Builds the data pipeline to collect, process, and align multimodal urban data (e.g., visual, textual, temporal, spatial). Responsibilities include data cleaning, missing value imputation, and spatio-temporal normalization across sources.
- **Validator.** Oversees quality control at multiple stages: (1) verifies data readiness (e.g., treatment/control group coverage, covariate completeness), (2) assesses robustness of results (e.g., placebo tests, sensitivity checks), and (3) ensures narrative coherence and policy alignment of the final report.
- **Experimenter.** Implements the experimental design by executing data analysis tasks (e.g., exploratory regressions, causal estimators) and generating outputs such as subgroup estimates and summary visualizations.
- **Data Scientist.** Designs the causal inference strategy by selecting appropriate identification methods (e.g., quasi-experiments, structural models), defining confounders and assumptions, and guiding the implementation plan.
- **Writer.** Integrates analytical findings and policy interpretations into a coherent report. It composes textual explanations, curates visual summaries, and ensures the final output communicates insights that are both rigorous and decision-relevant.