

TongUI: Building Generalized GUI Agents by Learning from Multimodal Web Tutorials

Bofei Zhang^{1*}, Zirui Shang^{2,1*}, Zhi Gao^{1,3*}, Wang Zhang¹, Rui Xie^{1,4},
Xiaojian Ma¹, Tao Yuan¹, Xinxiao Wu², Song-Chun Zhu^{1,3,5}, Qing Li¹✉

¹ State Key Laboratory of General Artificial Intelligence, BIGAI ² Beijing Key Laboratory of Intelligent Information Technology, School of Computer Science & Technology, Beijing Institute of Technology ³ School of Intelligence Science and Technology, Peking University

⁴ Shanghai Jiao Tong University ⁵ Department of Automation, Tsinghua University

<https://TongUI-agent.github.io>



Figure 1. TongUI crawls and processes multimodal web tutorials from diverse sources into GUI trajectories. The collected dataset spans over 200 applications across five operating systems, leading to powerful generalization in a wide range of GUI tasks.

Abstract

Building Graphical User Interface (GUI) agents is a promising research direction, which simulates human interaction with computers or mobile phones to perform diverse GUI tasks. However, a major challenge in developing generalized GUI agents is the lack of sufficient trajectory data across various operating systems and applications, mainly due to the high cost of manual annotations. In this paper, we propose the TongUI framework that builds generalized GUI agents by learning from rich multimodal web tutorials. Concretely, we crawl and process online GUI tutorials (such as videos and articles) into GUI agent trajectory data, through which we produce the GUI-Net dataset containing 143K trajectory data across five operating systems

and more than 200 applications. We develop the TongUI agent by fine-tuning Qwen2.5-VL-3B/7B models on GUI-Net, which show remarkable performance improvements on commonly used grounding and navigation benchmarks, outperforming baseline agents about 10% on multiple benchmarks, showing the effectiveness of the GUI-Net dataset and underscoring the significance of our TongUI framework. We will **fully open-source** the code, the GUI-Net dataset, and the trained models soon.

1. Introduction

Graphical User Interface (GUI) agents based on large foundation models are designed to automate tasks on digital devices by emulating human interactions with a variety of applications on different devices [23, 36, 44]. These agents utilize large language models (LLMs) or vision-language

* Equal contribution. ✉ Corresponding author.

models (VLMs) to process visual inputs (screenshots) and textual inputs (accessibility tree and HTML code) and produce corresponding actions, such as clicking buttons, filling forms, and scrolling, to complete GUI tasks that are often repetitive and time-consuming [10, 14, 43]. GUI agents significantly enhance human-computer interaction, providing potential applications to various domains, such as software testing, financial services, office assistance, and industrial automation, improving work efficiency and user experience.

Recently, notable efforts have been made for GUI agents by fine-tuning the foundation models [17, 27, 40]. However, collecting sufficient data for fine-tuning is challenging. Most existing approaches rely on either manually annotated interaction trajectories [19], which are high-quality but costly to obtain, or synthetic data generated from large open-source or proprietary LLM/VLMs, which may lack diversity and accuracy [6, 20, 26]. Desirable GUI agents need to perform actions across a wide variety of applications, each with unique interaction sequences, but collecting comprehensive and diverse data across different applications and operating systems remains a major challenge. As a result, the lack of large-scale, diverse, and well-structured GUI data continues to be a key bottleneck in developing robust and generalized GUI agents.

In this paper, we propose the TongUI framework that builds generalized GUI agents by learning from rich multimodal web tutorials, where ‘Tong’ means generalization in Chinese. Our key observation is that there are readily available multimodal web tutorials on the Internet about how to control computers and smart mobile phones, offering a wealth of information on interacting with various applications and operating systems. These tutorials, in either video or article with screenshots formats, provide detailed step-by-step instructions on interacting with GUI. Compared to the aforementioned manually collected or synthetic data pipeline, online tutorials offer easy accessibility, rich information content, and good quality. Thus, it is natural to build a framework that converts the multimodal web tutorials in diverse formats into task-solving trajectories for GUI agent tuning.

In doing so, we design the TongUI framework composed of three steps: tutorial crawling, tutorial processing, and trajectory generation. In the tutorial crawling step, we write some seed tasks and use LLMs to extend them into a wider collection of tasks, ensuring comprehensive coverage and enhanced realism of real-world GUI tasks. The generated tasks serve as keywords for retrieving content from hosts for online GUI tutorials (such as articles from WikiHow and videos from YouTube). The tutorial processing step aims to extract the textual descriptions and screenshots of multimodal tutorials. We first obtain textual descriptions of multimodal tutorials via automatic speech recognition (ASR) or captioning, through which task queries and plans are

produced using LLMs on the obtained textual descriptions. Then, we extract salient frames from videos as the screenshot of each step, while the images in articles are directly regarded as screenshots. Finally, we leverage one zero-shot GUI agent to automatically recognize trajectories, including reasoning thoughts and actions between two steps. Based on the tutorial collection pipeline, we construct a GUI-Net dataset that contains 143K data across five operating systems with more than 200 applications.

Based on GUI-Net, we develop the TongUI agent using Qwen2.5-VL-3B/7B models. We evaluate the TongUI agents on both the offline and online settings, and the results show that the TongUI agent exhibits consistent improvements in grounding and navigation capabilities. The results demonstrate the generalization of the TongUI agent, since it is trained on high-quality data across diverse applications, underscoring the effectiveness of the TongUI framework that improves the agents in a low-cost manner without the need for expensive manual annotation.

In summary, our contributions are three-fold:

- We propose the TongUI framework that enables GUI agents to automatically learn from web resources via tutorial crawling, tutorial processing, trajectory generation, and agent tuning, leading to better generalization.
- We construct the GUI-Net dataset, containing 143K data across five operating systems and over 200 applications.
- We develop the TongUI agent by fine-tuning Qwen2.5-VL models on GUI-Net, achieving improvements on multiple popular benchmarks.

We will **fully open-source** the code, the GUI-Net dataset, and the trained models.

2. Related Work

2.1. GUI Agent

The advancements of LLMs and VLMs accelerate the development of GUI agents. In the early state, only closed-source models are used (*e.g.*, GPT-4, Claude 3.5, and ChatGLM). Recently, more and more open-source models are released, such as Show-UI [17], UI-TARS [27], and CogVLM [37]. Grounding and planning are two important capabilities in GUI agents. The grounding capability means whether the GUI could identify correct buttons or regions for operations. Some methods improve the grounding capability by adding more prompts (accessibility trees, HTML, and set-of-mask) [5, 8, 22, 45, 47] and collecting grounding data for fine-tuning [41]. As for the planning capability of GUI agents, existing efforts improve it by prompt engineering [1, 12], supervised fine-tuning [10, 17, 27, 40], or reinforcement learning [13, 25]. In addition, some efforts focus on evaluating the GUI agents from multiple aspects, including action sequence [9, 31], grounding precision [4, 18], trajectory effectiveness [15, 16], and task com-

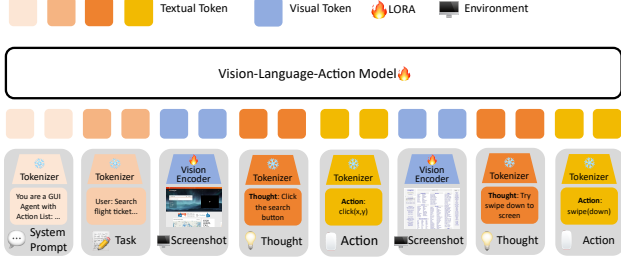


Figure 2. Illustration for TongUI model architecture.

pletion [30, 34, 38]. The evaluating performance in turn guides the research of intelligent agents.

2.2. Agent Data Collection

Compared with data collection for LLMs or VLMs, collecting high-quality data for agents is more challenging, since agents usually require long trajectories that solve complex tasks in different domains (e.g., GUI, multimodal reasoning, embodied AI). Commonly used schemes include human annotation and model synthesis. Human annotation could produce high-quality and diverse trajectory data, but may result in high cost [19]. Some efforts have been made to use zero-shot agents to produce synthetic trajectory data [6, 20, 26], while this may cause out-of-distribution data, leading to inferior results. Similar to other domains, human annotation and model generation are also commonly used to collect trajectories for GUI agents, including the planning, action sequence, and action position [3–5, 21, 27, 31]. In addition to the two schemes, considering that there are abundant resources for GUI operations on the Internet, some efforts focus on collecting trajectory data of GUI agents from the Web, to preserve the data quality and reduce costs simultaneously [24, 39]. They collect textual tutorials from the Internet, and convert them into trajectories by using LLMs or exploring in simulators. Unlike them, we directly collect multimodal tutorials from the Internet and propose a multimodal tutorial process pipeline to convert them into trajectories without any simulators. Meanwhile, compared with synthetic data in simulators, our data is closer to tasks in the real world with practical purposes, benefiting to the generalization capability of GUI agents.

3. Method

3.1. Formulation

We formulate GUI tasks as a sequential decision process, and we adopt ReAct [42] as our agent framework. At one time step i , given the observation of previous n steps $o_{i-n}, \dots, o_{i-1}, o_i$ (e.g., a screenshot of GUI), the thoughts r and actions a of previous n steps $(r_{i-n}, a_{i-n}, \dots, r_{i-1}, a_{i-1})$, and the query q , the agent generates a new thought r_i and an executable action a_i from the action space, such as clicking on a specific UI element,

entering text, or scrolling through the interface. Then, executing the action a_i leads to a new observation o_{i+1} (e.g., an updated screenshot). This interaction loop continues, with the agent repeatedly observing the environment, selecting actions, and receiving updated observations until either a termination condition is met (e.g., the task is completed or fails) or the maximum number of steps is reached. We parameterize the GUI agent using a vision-language-action model M_θ ,

$$r_i^*, a_i^* = \arg \max_{r_i, a_i} M_\theta(r_i, a_i | q, o_{i-n}, r_{i-n}, a_{i-n} \dots, o_{i-1}, r_{i-1}, a_{i-1}, o_i). \quad (1)$$

The architecture of the used model is shown in Fig. 2.

In this paper, we propose the TongUI framework that aims to tune M_θ by learning from multimodal web tutorials, as shown in Fig. 3. Such tutorials are usually formatted as $\{v, e\}$, where v denotes the visual information (such as images or videos), and e denotes the textual information (such as an introduction to a video). Our goal is to collect diverse multimodal tutorials $\{v, e\}$, and convert them into training data for GUI agents $\{q, o_1, r_1, a_1, \dots, o_T, r_T, a_T\}$ with the query q and the trajectory $(o_1, r_1, a_1, \dots, o_T, r_T, a_T)$ in T steps.

3.2. Tutorial Source

To collect multimodal web tutorials, we carefully select multiple data sources via brainstorming, ensuring that we cover a wide range of applications, operating systems, and task types. Concretely, we choose YouTube, Bilibili, TikTok, Wikipedi, and Baidu Experience, which host a variety of user-generated content on GUI tasks. YouTube, Bilibili, and TikTok host a variety of video tutorials about GUI tasks. For video tutorials, the visual information v is the video itself, and the textual information e includes the title, the brief introduction to the video, and the caption or audio of the video. Wikipedi and Baidu Experience are two widely used platforms that provide step-by-step articles with images in each step across multiple applications and operating systems. Here, the visual information v is the image sequence among all steps, and the textual information e includes the title and textual content in the article. In this case, we could get diverse multimodal web tutorials.

3.3. Tutorial Crawling

We use a keyword-based search approach. The search keywords are constructed by combining the name of the applications or website with the task content, that is “app/web + task.” Here, “app/web” refers to the operating system or application being used (e.g., a mobile app or website), while “task” refers to a complete workflow or a set of actions required to accomplish a specific objective (e.g., changing font size in Word, or browsing in Chrome). We iden-

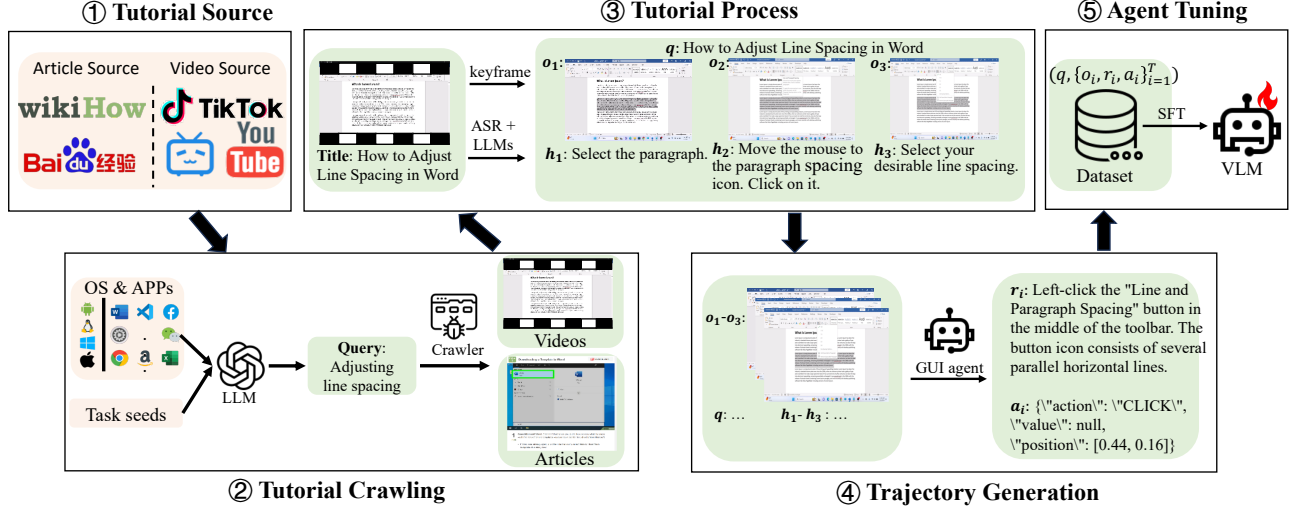


Figure 3. Illustration of TongUI, including tutorial source, tutorial crawling, tutorial process, trajectory generation, and agent tuning.

tify some task seeds across multiple applications via brainstorming, and expanded these seeds using LLMs to generate more diverse and relevant tasks.

With these keywords, we crawl multimodal web tutorials from source websites. We employ platform-specific methods to retrieve tutorials, including subtitles and audio. For YouTube, we utilize the Google API and YouTube’s official API to search for videos, and download the relevant content. For Bilibili and TikTok, we use the unofficial API to search for videos and retrieve both video and audio streams for download. For Wikihow and Baidu Experience, articles usually have multiple tags to indicate the main category of the tutorial, such as Windows, Chrome, Word, and *etc.* We crawl text-image tutorials using tags.

3.4. Tutorial Process

Textual processing. Given a crawled multimodal tutorial $\{v, e\}$, this process extracts the task q and rough descriptions $\{h_1, \dots, h_T\}$ in T steps. In video tutorials from Youtube, Tiktok, and Bilibili, the task guidance is usually in the video’s audio information without any textual introductions. To solve this issue, we begin the processing by applying the open-source speech recognition model, Whisper [28], to transcribe the audio streams into text. This step enables us to extract the text information e from these video tutorials. For image-text articles on Wikihow and Baidu Experience, we develop specific parsing tools for each website based on their article structures to extract the textual information e .

We use LLMs to clean the text e by removing irrelevant information, such as advertisements, off-topic content, and redundant expressions. LLMs are also used to identify key task-related verbs and nouns, such as “clicking a button”, “filling out a form”, or “selecting a menu,” which are crucial for understanding the tasks involved in the tu-

torial. Then, we leverage both the title and extracted text to classify tutorials into three categories: mobile, desktop, and other. The category ‘other’ indicates this task is irrelevant to GUI tasks. The categories ‘mobile’ and ‘desktop’ allow us to organize the data by device types, ensuring the tasks are appropriately tailored to their respective environments. Finally, we use LLMs to extract the task q and summarize this process into rough descriptions $\{h_1, \dots, h_T\}$ of T steps from the filtered textual information.

Visual processing. This process extracts the observation $\{o_1, \dots, o_T\}$ in the T steps. For text-image articles, we could directly obtain the image sequences as the observation $\{o_1, \dots, o_T\}$ from the crawled data. In practice, there are some noisy data in Baidu Experience and Wikihow, which might be diagrams, comics, or natural images rather than GUI screenshots. To address this issue, we prompt GPT-4o-Mini for image classifications, which classify each image as a screenshot or not.

For video tutorials, we need to extract key frames that correspond to critical actions in video tutorials, representing meaningful moments in the task-solving process. This process is crucial for constructing training data from video tutorials. We observe that the audio transcript of the videos often contains valuable planning information, such as the description of task steps. Therefore, when audio is available, we first segment the video based on the audio transcript timestamps, treating each segment as a potential task step. We then extract key frames from each of these segments. In the absence of audio, we treat the entire video as a single segment and extract key frames throughout the video. In doing so, we adopt the MOG2 background subtraction algorithm [48–50] to detect significant changes in GUI interactions. Specifically, this algorithm models the static background of GUI and isolates dynamic foreground elements that correspond to user interactions, such as clicks, form

submissions, or UI transitions. This algorithm updates the background model continuously as it processes consecutive video frames, detecting changes between each frame and the background. When significant differences between the current frame and the background are detected, the frame is considered a key frame, capturing potential GUI action. The frames preceding these detected changes are then considered as representative observations of the interface before the critical action occurs.

After textual and visual processing, tutorials from different sources are structured into a task q with text and image pairs of T steps, denoted as $(\{o_1, h_1\}, \dots, \{o_i, h_i\}, \dots, \{o_T, h_T\})$, where o_i is the image and h_i is the rough description in the i -th step, respectively.

3.5. Trajectory Generation

This process aims to generate the trajectory $(o_1, r_1, a_1, \dots, o_T, r_T, a_T)$ in T steps using the task q , and image o_i and rough description h_i in T steps. Concretely, we use a pretrained GUI agent (such as UI-TARS [27]) to generate the thought r_i and the action a_i using the same action space defined by the GUI agent. For the thought r_i and action a_i , we feed the observation o_i with h_i as the query to the zero-shot agent. Here, we use h_i as the query for agents instead of the task q , because q usually contains an abstract goal instead of specific instruction about what to do on the screen. We empirically find that using h_i leads to better performance. In this case, each step of text and image pairs can be written as $\{o_i, r_i, a_i\}$. In practice, the model might fail to generate well-formatted actions. We discard this step and make the next action the beginning of a new trajectory. For example, for a 4-step trajectory which has a failed generation in the second step, we split it into two training trajectories: $(\{o_1, r_1, a_1\})$ and $(\{o_3, r_3, a_3\}, \{o_4, r_4, a_4\})$. Finally, we combine the trajectory with the task q as $(q, \{o_i, r_i, a_i\}_{i=1}^T)$. We collect these trajectories into a GUI-Net dataset that contains 143K data with 1.24B tokens. These data is on five operating systems with more than 200 applications. After that, we use GUI-Net for supervised fine-tuning (SFT).

3.6. Agent Tuning

Given a data point $(q, \{o_i, r_i, a_i\}_{i=1}^T)$ of T -step, we train a VLM M_θ using the cross-entropy loss,

$$\min \mathbb{E}_{(q, \{o_i, r_i, a_i\}_{i=1}^T) \sim \mathbb{D}} \left[- \sum_{i=1}^T M_\theta(r_i, a_i | q, o_{i-n}, r_{i-n}, a_{i-n}, \dots, o_{i-1}, r_{i-1}, a_{i-1}, o_i) \right],$$

where $\mathbb{D}$ is the collected GUI-Net dataset, and we sum the loss values of the T steps in the trajectory. After training, we obtain the TongUI agent.

4. Dataset Statistics

We provide four key statistics: operating system distribution, application distribution, step distribution, and action distribution to show the diversity of the collected GUI-Net dataset. We show the **operating system distribution** in Fig. 4(a). Our dataset covers a diverse range of operating systems, including Windows, Android, iOS, MacOS, and Linux, ensuring a broad representation of GUI interactions across both desktop and mobile environments. The **application distribution** is shown in Fig. 4(b). Our dataset covers a wide variety of application categories, ensuring a broad and diverse range of user tasks. We show the **step distribution** in Fig. 4(c). Our dataset includes GUI interactions with varying step lengths, ranging from single-step actions to 9-step tasks. The distribution shows that shorter tasks (1-3 steps) are more frequent, while longer tasks gradually decrease in numbers. This distribution reflects a balance between simple and complex GUI interactions, capturing both quick actions and more involved workflows. The **action distribution** is shown in Fig. 4(d). Our dataset encompasses a diverse range of GUI actions, with Click and Tap being the most frequent, reflecting their central role in both desktop and mobile interactions. Other common actions include HotKey, Swipe, and Drag, covering various forms of user interactions.

5. Experiments

To evaluate the effectiveness of TongUI agent, we conduct experiments on multiple GUI benchmarks in both offline and online settings.

5.1. Setting

Additional Training Data. In addition to GUI-Net, we also refine some publicly available GUI datasets. For GUI grounding, we adopt ShowUI-website [17], ShowUI-desktop [17], and AMEX [2]. For GUI navigation, following the guidance of ShowUI, we use the training set from AITW [29], Mind2Web [5], MiniWob [11], and GUIAct [3]. We prompt GPT-4o-mini to generate thoughts for these datasets with textual guidance and visual spots on images, obtaining 256K data. We combine these data with GUI-Net for training, totally 143K+256K=399K data.

Evaluation Data. We evaluate the TongUI agent on offline benchmarks: ScreenSpot [4], AITW [29], Mind2Web [5], and Baidu Experience (we manually annotate 102 data points from the collected Baidu Experience data for testing). We also evaluate the TongUI agent on one online benchmark: MiniWob [33]. We use the same 35 tasks selected by SeeClick[4] to evaluate our model.

Training. We use Qwen2.5-VL-3B/7B as our base vision-language-action model. We train our model with a context window of 8192. We set the maximum number of previous

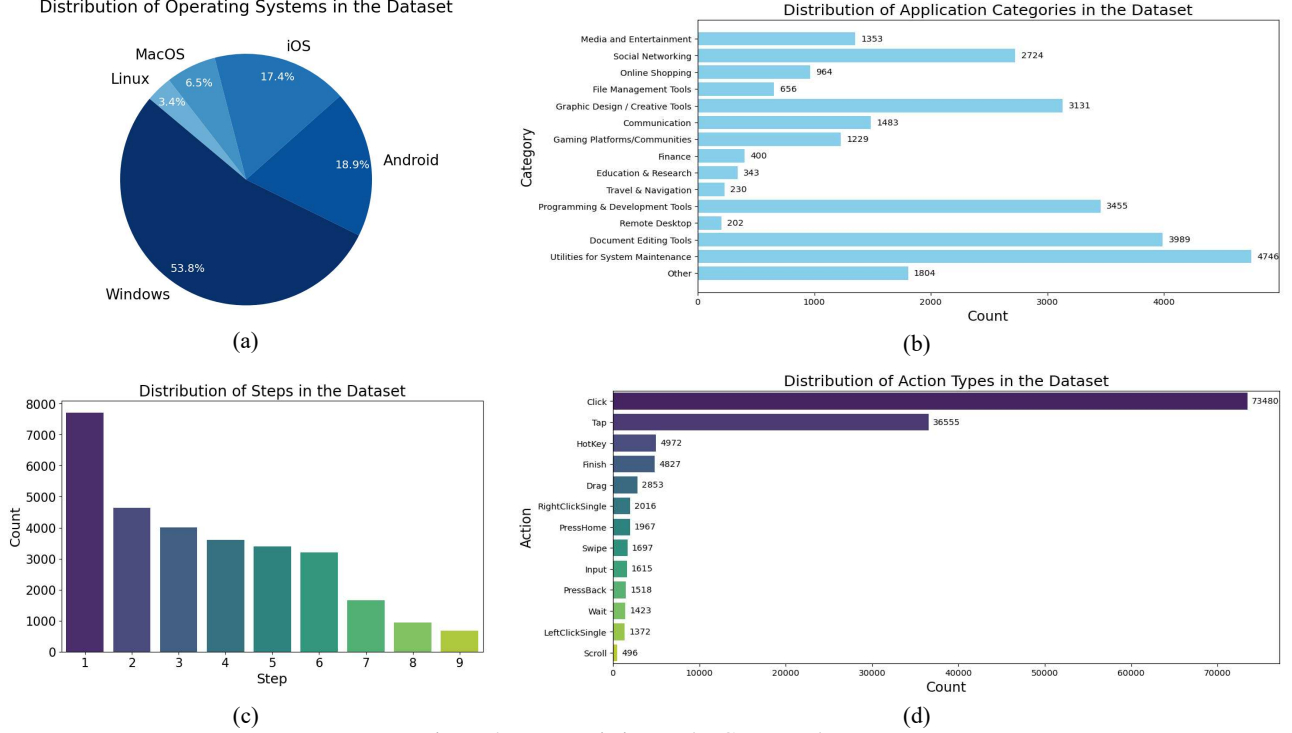


Figure 4. Data statistics on the GUI-Net dataset.

Model	Data Num	Data Size	Desktop Icon	Desktop Text	Mobile Icon	Mobile Text	Web Icon	Web Text	Average
SeeClick-9.6B [4]	364K	-	30.0	72.2	52.0	78.0	32.5	55.7	53.4
UGround-7B [7]	1.3M	-	63.6	82.5	60.3	82.8	80.4	73.3	70.4
OmniParser-GPT-4V [22]	-	-	63.6	<u>91.3</u>	57.0	<u>93.9</u>	51.0	81.3	73.0
ShowUI-2B [17]	256K	0.72B	61.1	76.3	75.5	92.3	63.6	81.7	75.1
UI-TARS-2B [27]	-	50B	68.6	90.7	75.5	93.0	<u>74.8</u>	84.3	82.3
UI-TARS-7B [27]	-	50B	85.7	95.9	85.2	94.5	83.5	90.0	89.5
Qwen2.5-VL-3B †	-	-	7.8	22.2	5.2	8.4	1.7	2.4	8.0
Qwen2.5-VL-7B †	-	-	16.4	26.8	5.2	6.6	7.3	13.0	12.6
TongUI-3B	399K	1.24B	68.5	86.5	76.0	90.5	68.4	87.4	79.6
TongUI-7B	399K	1.24B	<u>75.0</u>	91.2	<u>79.9</u>	93.0	72.3	<u>88.7</u>	<u>83.4</u>

Table 1. Results on ScreenSpot; † means the results are re-produced. We report results on six splits of ScreenSpot and the average scores. The best method is marked in bold, and the second-best method is underlined.

observations as 2, which results in at most three images in a trajectory. We limit each image to 1350 vision tokens. Our training involves two stages. First, we pre-train the model with datasets from ShowUI-desktop[17], ShowUI-web[17], AMEX[2], GUIAct[3], and GUI-Net. Secondly, we utilize the SFT data (training set of the evaluation dataset) to fine-tune the model. In both stages, we apply LoRA on our model’s vision encoder and LLM parts with rank 16 and alpha 32. This setting leads to 0.5% of total parameters. We set the batch size per device to 4 and the gradient accumulation steps to 8. We set the learning rate as $1e-4$ and AdamW optimizer for training. The pre-training process on $8 \times A100-80G$ takes roughly two days for a 3B model and three days for a 7B model.

Metrics. After training, we perform zero-shot evaluation of the model’s grounding capability on ScreenSpot. The annotation of ScreenSpot gives a bounding box for each interactive element. The action from the model is considered correct when the point predicted falls within the bounding box. For online evaluations, the environment of MiniWob provides reward functions, which suggests if a trajectory is correct. For offline evaluations such as Mind2Web, AITW, and Baidu Experience, the model will be asked to output actions with parameters. We evaluate if the action is correct by the exact match. For parameters, we do the exact match for string parameters and check if a point parameter falls within the bounding box based on annotations. We evaluate the model after fine-tuning on Mind2Web, AITW,

Method	General	Single	Web Shopping	Install	Google Apps	Average
PaLM2-CoT [46]	—	—	—	—	—	39.6
OmniParser [22]	48.3	57.8	51.6	77.4	52.9	57.7
SeeClick-9.6B [4]	54.0	73.7	57.6	66.4	54.9	59.3
ShowUI-2B [17]	63.9	<u>77.5</u>	<u>66.6</u>	72.5	69.7	70.0
Qwen2.5-VL-3B†	20.7	31.4	17.1	16.3	16.8	20.5
Qwen2.5-VL-7B†	39.4	41.1	35.8	43.2	42.3	40.4
Qwen2.5-VL-3B-ShowUI	<u>66.0</u>	74.4	65.0	74.5	70.3	70.1
TongUI-3B	65.6	77.0	65.8	<u>75.1</u>	74.5	<u>71.6</u>
TongUI-7B	67.6	79.9	69.1	76.3	<u>73.5</u>	73.3

Table 2. Results on the AITW. We report results on five splits of AITW and the average scores.

and MiniWob. In other evaluation datasets, we use the pre-trained model.

Compared Methods. We compare the TongUI agent with open-source methods, including ShowUI [17], SeeClick [4], and UI-TARS [27]. The training data size (counted in tokens) for TongUI, ShowUI, and UI-TARS are 0.72B, 1.24B, and 50B, respectively. Our training set is much smaller than that of UI-TARS. Note that the data used in UI-TARS has not been released, and the number can be inferred from its technical report. We will release our data.

5.2. Main Results

5.2.1. Grounding

In Tab. 1, we show the zero-shot grounding performance of TongUI. Similar to previous works [17], grounding on icon is much harder than grounding on text. The collected data leads to significant improvements on the baseline Qwen2.5-VL model. Compared with ShowUI, we use similar training data size, but it has about 4.5 % improvements. TongUI has a slightly worse performance than UI-TARS (3% on the 3B model and 6% on the 7B model), but the training data used by UI-TARS is 40 times that of ours, causing more resource consumption. These results demonstrate that GUI-Net can indeed improve the grounding capability of GUI agents.

5.2.2. Offline Navigation

AITW. AITW is a dataset about navigation on Android. The comparisons are shown in Tab. 2. We observe that the fine-tuned TongUI-3B model achieves better performance compared to ShowUI-2B by 1.6% in overall success rate. This shows that the collected data also improves the reasoning and planning capabilities of GUI agents on the navigation tasks. The larger model, TongUI-7B, gains 1.7% improvement compared to TongUI-3B, which is consistent with common sense.

Mind2Web. In Tab. 3, the results of web navigation show that TongUI achieves the best performance on all metrics. Notably, cross-task, cross-website, and cross-domain tasks are more difficult than conventional GUI tasks. This highlights that the collected data improves the generalization capability of GUI agents. We argue that the rea-

son is that the collected data involves diverse applications and operating systems, improving the generalization capability. Compared to ShowUI-2B, TongUI-3B has obvious improvements, especially on *Elem. Acc* and *Step SR*. Compared with ShowUI-Qwen2.5-VL-3B that fine-tunes the Qwen2.5-VL-3B model using the ShowUI dataset, TongUI-3B also has better performance (3.2% improvements), showing the quality of our data.

Baidu Experience. The collected Baidu experience evaluation set includes tasks in Chinese, which evaluate the performance of GUI agents across different languages. Results are shown in Tab. 4. Compared with the baseline model, TongUI has improvements on both action accuracy and success rate, showing better generalization capability brought by the GUI-Net dataset.

5.2.3. Online Navigation

We evaluate the online navigation performance on the MiniWob benchmark, and the results are shown in Tab. 5. Compared with offline navigation, online navigation tasks are more challenging, since they require real-time processing of dynamic environments, handling unexpected obstacles, and adapting to changes in the navigation path. In this case, TongUI that learns from multimodal tutorials achieves improvements again. Considering that the multimodal tutorials are offline data, this improvements confirm the generalization of TongUI.

5.3. User Study for Data Quality

To evaluate the data quality of the collected GUI-Net dataset, we conduct a user study. Concretely, we randomly sample 100 data points from the GUI-Net dataset and 100 data points from the ShowUI dataset. We mix the 200 data points. We ask 5 persons (with rich experience in GUI agents but not familiar with our project) to provide scores (0-5) for the data quality, and they do not know whether the data is from GUI-Net or ShowUI. ‘0’ represents ‘very poor’ and ‘5’ represents ‘excellent’.

The results are shown in Fig. 5, where the average scores assigned to the data points from the ShowUI dataset and our GUI-Net dataset are calculated. The ShowUI dataset received an average score of 4.26, while the GUI-Net dataset

Method	Cross-Task			Cross-Website			Cross-Domain		
	Elem. Acc	OP. F1	Step SR	Elem. Acc	OP. F1	Step SR	Elem. Acc	OP. F1	Step SR
CogAgent [10]	22.4	53.0	17.6	18.4	42.4	13.4	20.6	42.0	15.5
MindAct [5]	55.1	75.7	52.0	42.0	65.2	38.9	42.1	66.5	39.6
OmniParser [22]	42.4	87.6	39.4	41.0	84.8	36.5	45.5	85.7	42.0
ShowUI-2B [17]	39.9	88.6	37.2	41.6	83.5	35.1	39.4	86.8	35.2
SeeClick-9.6B [4]	28.3	87.0	25.5	21.4	80.6	16.4	23.2	84.8	20.8
Qwen2.5-VL-3B †	2.5	14.5	0.4	2.7	12.6	1.0	3.3	24.2	1.7
Qwen2.5-VL-7B †	6.2	72.8	5.0	6.3	68.2	4.5	8.4	73.6	7.2
Qwen2.5-VL-3B-ShowUI	43.2	88.7	39.7	41.3	<u>86.7</u>	35.5	45.1	86.1	40.7
TongUI-3B	48.0	88.4	44.2	<u>48.9</u>	85.4	<u>42.6</u>	<u>50.0</u>	<u>87.7</u>	<u>46.0</u>
TongUI-7B	<u>51.1</u>	88.7	<u>46.9</u>	50.4	87.5	43.7	53.9	88.6	49.1

Table 3. Results on Mind2Web. We report results on three types of tasks: cross-task, cross-website, and cross-domain. ‘Elem. Acc’ means whether the element is selected correctly, ‘OP. F1’ denotes the F1 score for the predicted action, and ‘Step SR’ counts successful steps.

Model	Action Accuracy	Success Rate
ShowUI-2B [17]	65.7	14.7
Qwen2.5-VL-3B	36.3	10.8
Qwen2.5-VL-7B	70.6	16.6
TongUI-3B	<u>86.3</u>	<u>18.6</u>
TongUI-7B	87.3	25.5

Table 4. Results on the Baidu Experience

Model	Finetuned	Score
CC-Net(SL) [11]	✓	23.4
Pix2Act [32]	✓	55.2
SeeClick-9.6B [4]	✓	67
Qwen2-VL-2B [35]	✓	66.8
ShowUI-2B [17]	✓	71.5
Qwen2.5-VL-3B	×	0.3
Qwen2.5-VL-3B-ShowUI	✓	67.7
TongUI-3B	✓	<u>71.7</u>
TongUI-7B	✓	71.9

Table 5. Results on the MiniWob

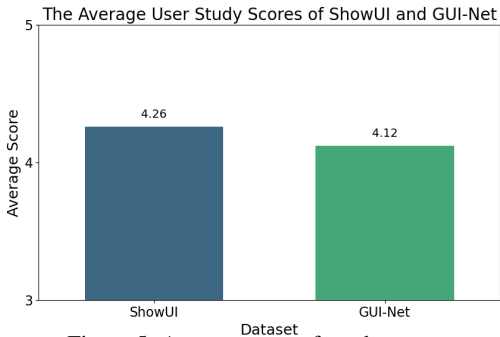


Figure 5. Average scores from humans

received an average score of 4.12. This suggests that data quality in GUI-Net is comparable to that in the ShowUI dataset, while our data leads to further improvements.

Data	ScreenSpot	Mind2Web		
		Task	Website	Domain
No SFT	8.0	0.4	1.0	1.7
Refined data	68.0	39.7	35.5	40.7
+ WikiHow	75.8	42.1	39.6	44.4
+ Baidu	78.7	43.4	41.6	45.5
+ Video	79.6	44.2	42.6	46.0

Table 6. Performance scaling over data sources testing on Qwen2.5-VL-3B, where Step SR is reported for Mind2Web.

5.4. Data Scaling Effect

We evaluate the scaling law of GUI agents using collected data from different sources. Concretely, (1) we report the performance w/o SFT; (2) we use the refined public data to tune the model; (3) we add data collected from WikiHow to tune the model; (4) we add data collected from Baidu Experience to tune the model; (5) we add data collected from Video tutorials to tune the model. Results is shown in Tab. 6. We find that with the increase of data numbers and data sources, the performance of GUI agents is also constantly improving.

6. Conclusion

In this paper, we present the TongUI framework that allows GUI agents to learn from multimodal web tutorials. By defining suitable and rich sources, we can crawl multimodal tutorials about diverse applications in different operating systems. The proposed tutorial processing method can extract tasks and trajectories from tutorials, and we obtain the GUI-Net dataset. Using this dataset, the tuned Qwen2.5-VL model achieves improvements on multiple commonly used benchmarks, demonstrating the effectiveness of the TongUI framework and the collected GUI-Net dataset. In this method, we have to collect all tutorials and train the model once, which may overlook the potential for continual learning. In the future, we will explore the continual learning capability of GUI agents, enabling the agents to better adapt to new environments.

References

- [1] Saaket Agashe, Jiuzhou Han, Shuyu Gan, Jiachen Yang, Ang Li, and Xin Eric Wang. Agent s: An open agentic framework that uses computers like a human. *arXiv preprint arXiv:2410.08164*, 2024. 2
- [2] Yuxiang Chai, Siyuan Huang, Yazhe Niu, Han Xiao, Liang Liu, Dingyu Zhang, Peng Gao, Shuai Ren, and Hongsheng Li. Amex: Android multi-annotation expo dataset for mobile gui agents. *arXiv preprint arXiv:2407.17490*, 2024. 5, 6
- [3] Wentong Chen, Junbo Cui, Jinyi Hu, Yujia Qin, Junjie Fang, Yue Zhao, Chongyi Wang, Jun Liu, Guirong Chen, Yupeng Huo, et al. Guicourse: From general vision language models to versatile gui agents. *arXiv preprint arXiv:2406.11317*, 2024. 3, 5, 6
- [4] Kanzhi Cheng, Qiushi Sun, Yougang Chu, Fangzhi Xu, Li YanTao, Jianbing Zhang, and Zhiyong Wu. Seeclick: Harnessing gui grounding for advanced visual gui agents. In *Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 9313–9332, 2024. 2, 5, 6, 7, 8
- [5] Xiang Deng, Yu Gu, Boyuan Zheng, Shijie Chen, Sam Stevens, Boshi Wang, Huan Sun, and Yu Su. Mind2web: Towards a generalist agent for the web. *Advances in Neural Information Processing Systems (NeurIPS)*, 36:28091–28114, 2023. 2, 3, 5, 8
- [6] Zhi Gao, Bofei Zhang, Pengxiang Li, Xiaojian Ma, Tao Yuan, Yue Fan, Yuwei Wu, Yunde Jia, Song-Chun Zhu, and Qing Li. Multi-modal agent tuning: Building a vlm-driven agent for efficient tool usage. *arXiv preprint arXiv:2412.15606*, 2024. 2, 3
- [7] Boyu Gou, Ruohan Wang, Boyuan Zheng, Yanan Xie, Cheng Chang, Yiheng Shu, Huan Sun, and Yu Su. Navigating the digital world as humans do: Universal visual grounding for gui agents. *arXiv preprint arXiv:2410.05243*, 2024. 6
- [8] Izzeddin Gur, Hiroki Furuta, Austin Huang, Mustafa Safdari, Yutaka Matsuo, Douglas Eck, and Aleksandra Faust. A real-world webagent with planning, long context understanding, and program synthesis. *arXiv preprint arXiv:2307.12856*, 2023. 2
- [9] Hongliang He, Wenlin Yao, Kaixin Ma, Wenhao Yu, Yong Dai, Hongming Zhang, Zhenzhong Lan, and Dong Yu. Webvoyager: Building an end-to-end web agent with large multimodal models. *arXiv preprint arXiv:2401.13919*, 2024. 2
- [10] Wenyi Hong, Wei Han Wang, Qingsong Lv, Jiazheng Xu, Wenmeng Yu, Junhui Ji, Yan Wang, Zihan Wang, Yuxiao Dong, Ming Ding, et al. Cogagent: A visual language model for gui agents. In *The IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14281–14290, 2024. 2, 8
- [11] Peter C Humphreys, David Raposo, Tobias Pohlen, Gregory Thornton, Rachita Chhaparia, Alistair Muldal, Josh Abramson, Petko Georgiev, Adam Santoro, and Timothy Lillicrap. A data-driven approach for learning to control computers. In *International Conference on Machine Learning (ICML)*, pages 9466–9482. PMLR, 2022. 5, 8
- [12] Chengyou Jia, Minnan Luo, Zhuohang Dang, Qiushi Sun, Fangzhi Xu, Junlin Hu, Tianbao Xie, and Zhiyong Wu. Agentstore: Scalable integration of heterogeneous agents as specialized generalist computer assistant. *arXiv preprint arXiv:2410.18603*, 2024. 2
- [13] Hanyu Lai, Xiao Liu, Iat Long Iong, Shuntian Yao, Yuxuan Chen, Pengbo Shen, Hao Yu, Hanchen Zhang, Xiaohan Zhang, Yuxiao Dong, et al. Autowebglm: A large language model-based web navigating agent. In *ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD)*, pages 5295–5306, 2024. 2
- [14] Sunjae Lee, Junyoung Choi, Jungjae Lee, Munim Hasan Wasi, Hojun Choi, Steven Y Ko, Sangeun Oh, and Insik Shin. Explore, select, derive, and recall: Augmenting llm with human-like memory for mobile task automation. *arXiv preprint arXiv:2312.03003*, 2023. 2
- [15] Wei Li, William E Bishop, Alice Li, Christopher Rawles, Folawiyo Campbell-Ajala, Divya Tyamagundlu, and Oriana Riva. On the effects of data scale on ui control agents. *Advances in Neural Information Processing Systems (NeurIPS)*, 37:92130–92154, 2025. 2
- [16] Kevin Qinghong Lin, Linjie Li, Difei Gao, Qinchen Wu, Mingyi Yan, Zhengyuan Yang, Lijuan Wang, and Mike Zheng Shou. Videogui: A benchmark for gui automation from instructional videos. *arXiv preprint arXiv:2406.10227*, 2024. 2
- [17] Kevin Qinghong Lin, Linjie Li, Difei Gao, Zhengyuan Yang, Shiwei Wu, Zechen Bai, Weixian Lei, Lijuan Wang, and Mike Zheng Shou. Showui: One vision-language-action model for gui visual agent. *arXiv preprint arXiv:2411.17465*, 2024. 2, 5, 6, 7, 8
- [18] Junpeng Liu, Yifan Song, Bill Yuchen Lin, Wai Lam, Graham Neubig, Yuanzhi Li, and Xiang Yue. Visualwebbench: How far have multimodal llms evolved in web page understanding and grounding? *arXiv preprint arXiv:2404.05955*, 2024. 2
- [19] Xiao Liu, Tianjie Zhang, Yu Gu, Iat Long Iong, Yifan Xu, Xixuan Song, Shudan Zhang, Hanyu Lai, Xinyi Liu, Hanlin Zhao, et al. Visualagentbench: Towards large multimodal models as visual foundation agents. *arXiv preprint arXiv:2408.06327*, 2024. 2, 3
- [20] Zuxin Liu, Thai Hoang, Jianguo Zhang, Ming Zhu, Tian Lan, Shirley Kokane, Juntao Tan, Weiran Yao, Zhiwei Liu, Yihao Feng, et al. Apigen: Automated pipeline for generating verifiable and diverse function-calling datasets. *arXiv preprint arXiv:2406.18518*, 2024. 2, 3
- [21] Quanfeng Lu, Wenqi Shao, Zitao Liu, Fanqing Meng, Boxuan Li, Botong Chen, Siyuan Huang, Kaipeng Zhang, Yu Qiao, and Ping Luo. Gui odyssey: A comprehensive dataset for cross-app gui navigation on mobile devices. *arXiv preprint arXiv:2406.08451*, 2024. 3
- [22] Yadong Lu, Jianwei Yang, Yelong Shen, and Ahmed Awadallah. Omniparser for pure vision based gui agent. *arXiv preprint arXiv:2408.00203*, 2024. 2, 6, 7, 8
- [23] Dang Nguyen, Jian Chen, Yu Wang, Gang Wu, Namyong Park, Zhengmian Hu, Hanjia Lyu, Junda Wu, Ryan Aponte, Yu Xia, et al. Gui agents: A survey. *arXiv preprint arXiv:2412.13501*, 2024. 1
- [24] Tianyue Ou, Frank F Xu, Aman Madaan, Jiarui Liu, Robert Lo, Abishek Sridhar, Sudipta Sengupta, Dan Roth, Graham

- Neubig, and Shuyan Zhou. Synatra: Turning indirect knowledge into direct demonstrations for digital agents at scale. *arXiv preprint arXiv:2409.15637*, 2024. 3
- [25] Pranav Putta, Edmund Mills, Naman Garg, Sumeet Motwani, Chelsea Finn, Divyansh Garg, and Rafael Rafailov. Agent q: Advanced reasoning and learning for autonomous ai agents. *arXiv preprint arXiv:2408.07199*, 2024. 2
- [26] Yujia Qin, Shihao Liang, Yining Ye, Kunlun Zhu, Lan Yan, Yaxi Lu, Yankai Lin, Xin Cong, Xiangru Tang, Bill Qian, et al. Toolllm: Facilitating large language models to master 16000+ real-world apis. *arXiv preprint arXiv:2307.16789*, 2023. 2, 3
- [27] Yujia Qin, Yining Ye, Junjie Fang, Haoming Wang, Shihao Liang, Shizuo Tian, Junda Zhang, Jiahao Li, Yunxin Li, Shijue Huang, et al. Ui-tars: Pioneering automated gui interaction with native agents. *arXiv preprint arXiv:2501.12326*, 2025. 2, 3, 5, 6, 7
- [28] Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. Robust speech recognition via large-scale weak supervision. In *International Conference on Machine Learning (ICML)*, pages 28492–28518. PMLR, 2022. 4
- [29] Christopher Rawles, Alice Li, Daniel Rodriguez, Oriana Riva, and Timothy Lillicrap. Androidinthewild: A large-scale dataset for android device control. *Advances in Neural Information Processing Systems (NeurIPS)*, 36:59708–59728, 2023. 5
- [30] Christopher Rawles, Sarah Clinckemaillie, Yifan Chang, Jonathan Waltz, Gabrielle Lau, Marybeth Fair, Alice Li, William Bishop, Wei Li, Folawiyo Campbell-Ajala, et al. Androidworld: A dynamic benchmarking environment for autonomous agents. *arXiv preprint arXiv:2405.14573*, 2024. 3
- [31] Christopher Rawles, Alice Li, Daniel Rodriguez, Oriana Riva, and Timothy Lillicrap. Androidinthewild: A large-scale dataset for android device control. *Advances in Neural Information Processing Systems (NeurIPS)*, 36, 2024. 2, 3
- [32] Peter Shaw, Mandar Joshi, James Cohan, Jonathan Berant, Panupong Pasupat, Hexiang Hu, Urvashi Khandelwal, Kenton Lee, and Kristina N Toutanova. From pixels to ui actions: Learning to follow instructions via graphical user interfaces. *Advances in Neural Information Processing Systems (NeurIPS)*, pages 34354–34370, 2023. 8
- [33] Tianlin Shi, Andrej Karpathy, Linxi Fan, Jonathan Hernandez, and Percy Liang. World of bits: An open-domain platform for web-based agents. In *International Conference on Machine Learning (ICML)*, pages 3135–3144. PMLR, 2017. 5
- [34] Harsh Trivedi, Tushar Khot, Mareike Hartmann, Ruskin Manku, Vinty Dong, Edward Li, Shashank Gupta, Ashish Sabharwal, and Niranjan Balasubramanian. Appworld: A controllable world of apps and people for benchmarking interactive coding agents. *arXiv preprint arXiv:2407.18901*, 2024. 3
- [35] Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, et al. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024. 8
- [36] Shuai Wang, Weiwen Liu, Jingxuan Chen, Yuqi Zhou, Weinan Gan, Xingshan Zeng, Yuhan Che, Shuai Yu, Xinlong Hao, Kun Shao, et al. Gui agents with foundation models: A comprehensive survey. *arXiv preprint arXiv:2411.04890*, 2024. 1
- [37] Weihang Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Xixuan Song, Jiazheng Xu, Bin Xu, Juanzi Li, Yuxiao Dong, Ming Ding, and Jie Tang. Cogvlm: Visual expert for pretrained language models, 2023. 2
- [38] Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, Siheng Zhao, Ruisheng Cao, Jing Hua Toh, Zhoujun Cheng, Dongchan Shin, Fangyu Lei, et al. Osloworld: Benchmarking multimodal agents for open-ended tasks in real computer environments. *Advances in Neural Information Processing Systems (NeurIPS)*, 37:52040–52094, 2025. 3
- [39] Yiheng Xu, Dunjie Lu, Zhennan Shen, Junli Wang, Zekun Wang, Yuchen Mao, Caiming Xiong, and Tao Yu. Agent-trek: Agent trajectory synthesis via guiding replay with web tutorials. *arXiv preprint arXiv:2412.09605*, 2024. 3
- [40] Yiheng Xu, Zekun Wang, Junli Wang, Dunjie Lu, Tianbao Xie, Amrita Saha, Doyen Sahoo, Tao Yu, and Caiming Xiong. Aguis: Unified pure vision agents for autonomous gui interaction. *arXiv preprint arXiv:2412.04454*, 2024. 2
- [41] Yuhao Yang, Yue Wang, Dongxu Li, Ziyang Luo, Bei Chen, Chao Huang, and Junnan Li. Aria-ui: Visual grounding for gui instructions. *arXiv preprint arXiv:2412.16256*, 2024. 2
- [42] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations (ICLR)*, 2023. 3
- [43] Keen You, Haotian Zhang, Eldon Schoop, Floris Weers, Amanda Swearngin, Jeffrey Nichols, Yinfei Yang, and Zhe Gan. Ferret-ui: Grounded mobile ui understanding with multimodal llms. In *European Conference on Computer Vision (ECCV)*, pages 240–255. Springer, 2024. 2
- [44] Chaoyun Zhang, Shilin He, Jiaxu Qian, Bowen Li, Liqun Li, Si Qin, Yu Kang, Minghua Ma, Qingwei Lin, Saravan Rajmohan, et al. Large language model-brained gui agents: A survey. *arXiv preprint arXiv:2411.18279*, 2024. 1
- [45] Chaoyun Zhang, Liqun Li, Shilin He, Xu Zhang, Bo Qiao, Si Qin, Minghua Ma, Yu Kang, Qingwei Lin, Saravan Rajmohan, et al. Ufo: A ui-focused agent for windows os interaction. *arXiv preprint arXiv:2402.07939*, 2024. 2
- [46] Zhuosheng Zhang and Aston Zhang. You only look at screens: Multimodal chain-of-action agents. In *Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 3132–3149, 2024. 7
- [47] Shuyan Zhou, Frank F Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Tianyue Ou, Yonatan Bisk, Daniel Fried, et al. Webarena: A realistic web environment for building autonomous agents. *arXiv preprint arXiv:2307.13854*, 2023. 2
- [48] Zoran Zivkovic. Improved adaptive gaussian mixture model for background subtraction. In *Proceedings of the 17th Inter-*

national Conference on Pattern Recognition (ICPR), pages 28–31, 2004. [4](#)

- [49] Zoran Zivkovic. Recursive unsupervised learning of finite mixture models. *Transactions on Pattern Analysis and Machine Intelligence (TPAMI)*, 26(5):651–656, 2004.
- [50] Zoran Zivkovic and Ferdinand van der Heijden. Efficient adaptive density estimation per image pixel for the task of background subtraction. *Pattern Recognition Letters*, 27(7): 773–780, 2006. [4](#)

A. Details

A.1. Action Space

The used action space is shown in Tab. 7.

A.2. Prompt

In Listing 1, we show the system prompt in our agent framework.

Listing 1. System prompt for GUI-Net Agent

```
You are an assistant trained to navigate
the computer/mobile screen.
Given a task instruction, a screen
observation, and an action history
sequence,
output the next action and wait for the
next observation.
Here is the action space:
{action_space}
Format your response as
Thought: <your reasoning process>
Action: <the next action>

Format the action as a JSON object with the
following keys:
{"action": "ACTION_TYPE", "value": "element
", "position": [x,y]}

You can output multiple actions at once,
and use JSON array to represent multiple
actions.
If value or position is not applicable, set
it as 'None'.
Position might be [[x1,y1], [x2,y2]] if the
action requires a start and end
position.
Position represents the relative
coordinates on the screenshot and should
be scaled to a range of 0-1.
```

In Listing 2, we show a typical action space prompt for desktop.

Listing 2. Action space for GUI-Net Agent

```
1. 'CLICK': Click on an element, value is
not applicable and the position [x,y] is
required.
2. 'INPUT': Type a string into an element,
value is a string to type and the
position [x,y] is required.
3. 'SCROLL': Scroll the screen, value is
the direction to scroll and the position
is start position of the scroll
operation.
4. 'LEFT_CLICK_DOUBLE': Left click on an
element twice, value is not applicable
and the position [x,y] is required.
```

```
5. 'RIGHT_CLICK_SINGLE': Right click on an
element once, value is not applicable
and the position [x,y] is required.
6. 'DRAG': Drag the cursor to the specified
position with the left button pressed.
Value is not applicable and position [[
x1,y1], [x2,y2]] is the start and end
position of the drag operation.
7. 'HOT_KEY': Press a hot key, value is the
hot key and the position is not
applicable.
8. 'WAIT': Wait for 5 seconds, and take a
screenshot to check for any changes.
Value and position are not applicable.
9. 'FINISH': Finish the task. Value and
position are not applicable.
```

B. Dataset

B.1. Dataset Size

We show our data size in Tab. 8, including four components: collected data from Wikihow, collected data from Baidu Experience, collected data from Video tutorials, and refined data from ShowUI.

B.2. Applications

In GUI-Net, the collected data spans about 280 applications that are shown in Figs. 6 and 7.

C. Examples

C.1. GUI-Net

We visualize several examples of collected trajectory data, as shown in Figs. 8 to 12.

C.2. TongUI

We visualize several examples executed by the TongUI agent, as shown in Figs. 13 to 16.

Environment	Action	Definition
Desktop	Click(x,y)	Left single click on an element.
	Input(value, x, y)	Type a string into certain element.
	Scroll(direction, x, y)	Scroll screen with left/right/up/down direction. X and y is the start point.
	LeftClickDouble(x, y)	Left double click on an element
	RightClickSingle(x, y)	Right single click on an element
	Drag(x1,y1,x2, y2)	Drag the cursor to the position with left key pressed.
	HotKey(value)	Press the hot key.
	Hover(x, y)	Hover over an element.
Mobile	Finish()	Finish the task.
	Tap(x, y)	Finger tap on an element.
	Input(value, x, y)	Type a string into an element.
	Swipe(x1, y1, x2, y2)	Swipe the screen from the start position to the end position.
	LongPress(duration, x, y)	Press on an element with certain seconds.
	PressHome()	Press the home button.
	PressBack()	Press the back button.
	Finish()	Finish the task.

Table 7. Action space in trajectory generation.

360WIFI	Adobe Premiere	DeSmuME	Google Classroom	Keep
AVG AntiVirus	Adobe Reader	Discord	Google Colab	Keynote
Adobe Acrobat	Adobe RoboHelp	DosBox	Google Docs	Kickstarter
Adobe After Effects	Adobe Rush	Dropbox	Google Drive	LaTeX
Adobe Analytics	Adobe Sign	Dwarf Fortress	Google Earth Pro	LabVIEW
Adobe Animate	Adobe Spark	EA App	Google Fonts	LightWorks
Adobe Audience Manager	Adobe Target	EasyBCD	Google Gmail	Little Alchemy
Adobe Audition	Adobe XD	EasyCam	Google Keep	Little Alchemy 2
Adobe Bridge	AnyBizSoft PDF Converter	Email Apps	Google Lens	Live Server
Adobe Campaign	AnyDesk	Email Verification Services	Google My Business	LiveAgent
Adobe Captivate	ArcGIS	Epic Games	Google My Maps	MATLAB
Adobe Character Animator	Audacity	Evernote	Google Photos	Make3D
Adobe Commerce	Baidu Browser	Facebook	Google Play	MediaCreationTool
Adobe Connect	Baidu Map	Figma	Google Podcasts	Mega Voice Command
Adobe Creative Cloud	Baidu Translate	Final Cut Pro	Google Search Console	Microsoft Copilot
Adobe Creative Suite	Baidu Wifi Hotspot	Find My Lost Pet	Google Slides	Microsoft Defender
Adobe Digital Editions	Bing Ads	FindLegalForms	Google Translate	Microsoft Excel
Adobe Dimension	Bing Wallpaper	Firefox	Google Workspace	Microsoft Loop
Adobe Document Cloud	BitLife	Flash	Grammarly	Microsoft OneNote
Adobe Dreamweaver	BitTorrent	FlexiSPY	Hearthstone	Microsoft PowerPoint
Adobe Experience Manager	Blooket	Flipkart	HelloFresh	Microsoft Publisher
Adobe Fill & Sign	Bluestacks	Flixster	Honkai: Star Rail	Microsoft Stream
Adobe Fireworks	Camtasia	Free Spire.PDF	Hulu	Microsoft Teams
Adobe Fresco	Candy Crush	Freegal Music	ImgBurn	Microsoft Visual Basic
Adobe Illustrator	Canva	Garry's Mod	Imgur	Microsoft Word
Adobe InCopy	ChatGPT	Genshin Impact	Instagram	Minecraft
Adobe InDesign	Chatroulette	GitHub	JW.org	Minecraft PE
Adobe Lightroom	Chrome	GitKraken	Jabber	Mortal Kombat
Adobe Muse	CodeBlocks	Google Ads	JetBlue	Mortal Kombat Karnage
Adobe Photoshop	Converge Wifi	Google Analytics	Jira	MyFitnessPal
Adobe Portfolio	Crunchyroll	Google Camera	JobNimbus	MyRadar
Adobe Prelude	DataGrip	Google Chat	KakaoTalk	Notion

Figure 6. Collected applications.


OBS Studio	Steam	企业微信	米阅小说
OpenAI ChatGPT	Subversion	伴伴APP	网易有道词典
OpenAI Text Classifier	SurveyMonkey	元道经纬相机	网易游戏助手
OpenOffice Writer	Telegram	光遇	美团
Opera	Trello	全民WiFi	美柚
Outlook	Turbo C++	剪影	腾讯QQ
Postman	Ubera	咪咕音乐	腾讯体育
Power BI	Uber Eats	唱吧	腾讯体育APP
Power Query	Visual Boy Advance	喜马拉雅	腾讯游戏平台
Power School	Visual Studio	在线PDF转图片工具	荔枝新闻
Project 64	Visual Studio Code	壹心理	薄荷健康
QuickBooks Online	WAMP	大众点评	虚拟主机管理面板
QuickTime	WiFi密码查看器	天猫	视频转换器
RStudio	WPS PDF	天猫精灵	解密100层
RabbitMQ	WPS Word	奥拉星	记得倒数日APP
Reddit	WPS表格	安兔兔测评	转转大师
Redis	Wireshark	安卓系统数据恢复软件	闪视频
Revit	Word Online	小米投屏神器	阿里钱盾
Roblox	YouTube	当当app	高德地图
Rockstar Games	YouTube Downloader	必胜客	魔方电脑大师
SQL Server Management Studio	YouTube Music	快读	
Sage 200	YouTube Studio	怪兽射击	
Sage Intacct	Zoom	斗鱼	
Salesforce	Zotero	无尽长空	
Sims	iMessage	时间记录软件app	
Slack	iTunes	极路由	
Snapchat	uTorrent	深度商店	
Snapseed	一点TV	爱数备份	
SolidWorks	万兴PDF编辑器	猎豹WiFi	
SpeedFan	万年历	王者荣耀	
Speedtest	中国银河证券	百度五笔输入法	
Spotify	书旗小说	百度浏览器	

Figure 7. Collected applications.

Dataset	Token	Trajectory
Wikihow	151M	42K
Baidu Experience	178M	51K
Video Tutorial	195M	50K
Refined ShowUI	720M	256K

Table 8. Our data statistics by the token and trajectory. We compute token by Qwen2.5-VL tokenizer and each image is counted as 1350 vision tokens.

How To Create Group Chat On WeChat

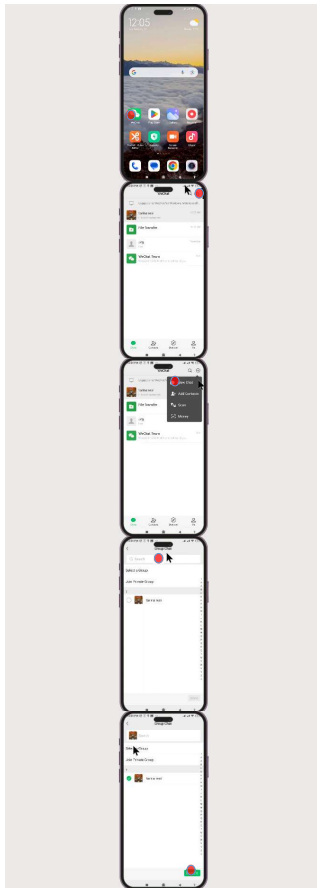

Thought: To proceed with creating a group chat on WeChat, I need to first open the WeChat app. This will allow me to access its interface and features, including the option to create a group chat. Tap on the WeChat app icon located in the second row of apps on the home screen.

Action: Tap [0.12, 0.62]

Thought: To proceed with creating a group chat on WeChat, the first step is to initiate a new chat. This can be done by interacting with the "+" icon in the top-right corner of the screen. This aligns with the goal of starting a group chat creation process. Tap on the "+" icon in the top-right corner of the screen to begin creating a new chat.

Action: Tap [0.96, 0.07]

Thought: Clicking the "New Chat" button will likely present options for starting a new conversation or creating a group chat, which aligns with the tutorial's goal. Tap on the "New Chat" button in the top-right corner of the screen.

Action: Tap [0.59, 0.17]

Thought: To create a group chat on WeChat, the next logical step is to select or confirm the participants for the group. Since "Tamina Resi" is listed as a contact, tapping on it will likely add this contact to the group or proceed with their inclusion in the chat. Tap on the listed contact "Tamina Resi" to select them as a participant for the group chat.

Action: Tap [0.4, 0.18]

Thought: To finalize the creation of the group chat, I need to confirm the selection by interacting with the "Done" button. This Action will likely save the group chat and complete the process, as it is prominently displayed and aligns with the goal of creating a group chat. Tap on the "Done" button to confirm and complete the group chat creation process.

Action: Tap [0.88, 0.97]


Figure 8. Dataset example.

How to Uninstall Chrome Apps and Extensions




Thought: 左键单击浏览器右上角的三点菜单按钮，以打开浏览器的设置和选项菜单。

Action: Click [0.99, 0.04]




Thought: 左键单击浏览器右上角的更多工具按钮，以打开更多工具选项菜单。

Action: Click [0.97, 0.73]

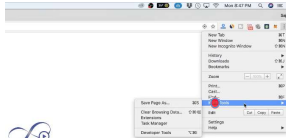

Thought: 左键单击拓展按钮按钮，以进行更多操作。

Action: Click [0.67, 0.85]

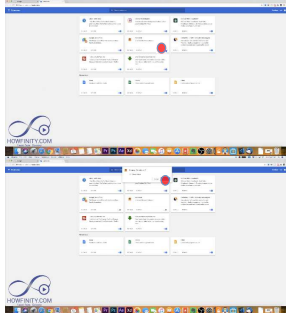

Thought: 将鼠标移动到页面上半部分中间位置的"MetaMask"扩展程序卡片右下角的蓝色圆形按钮，点击该圆形按钮以卸载Chrome应用和扩展。


Action: Click [0.56, 0.34]

Thought: 左键单击弹出窗口中的"Remove"按钮，以卸载MetaMask扩展程序。该按钮位于窗口的右下角，是一个带有蓝色背景和白色文字的矩形按钮。

Action: Click [0.57, 0.14]

Figure 9. Dataset example.

How to Adjust Line Spacing in MS Word

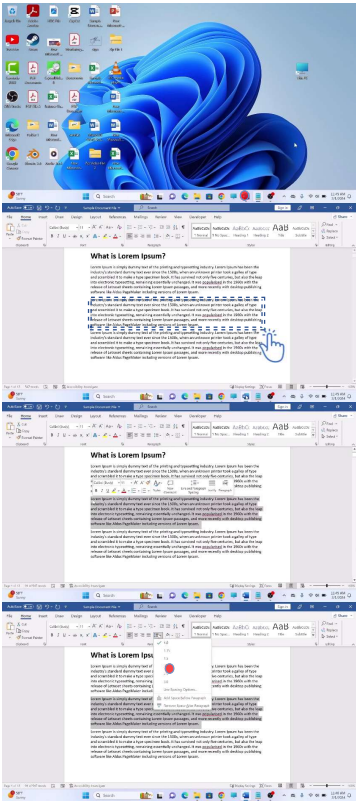

Thought: 首先左键单击任务栏上的Word图标，位于第一列第六个。打开Word文档，然后根据文档内容的具体要求，调整行距。

Action: Click [0.68, 0.97]

Thought: 鼠标左键拖动选中页面第二段文本的全部内容。

Action: Drag [[0.25, 0.48], [0.73, 0.6]]

Thought: 左键单击页面顶部工具栏中的段落设置按钮，该按钮由一个文本对齐图标组成，并位于页面顶部工具栏的中间偏右位置。


Action: Click [0.38, 0.44]

Thought: 左键单击页面中间偏上的“行距”下拉菜单中的“2.0”选项，以调整文档的行距。

Action: Click [0.49, 0.33]

Figure 10. Dataset example.

Change-the-Text-Size-in-the-Mail-App-on-iOS

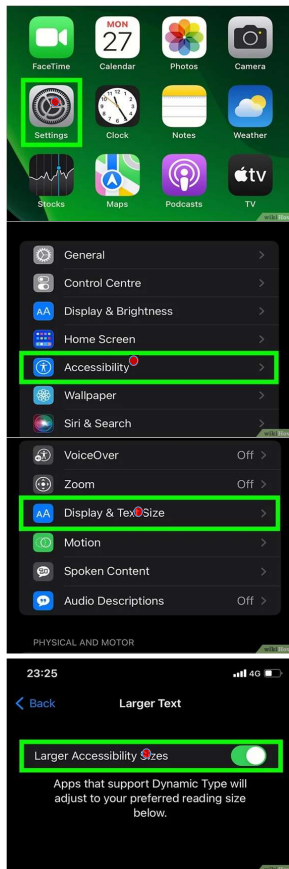

Thought: To proceed with the task of adjusting the text size in older versions of iOS, I need to open the Settings app as instructed. The icon for "Settings" is clearly visible on the top row, second from the left, and tapping it will launch the app. Tap on the "Settings" app icon to open the Settings application.

Action: Tap [0.18, 0.47]

Thought: The Settings menu is fully visible, and the "Accessibility" option is clearly marked with a blue highlight, indicating it is the next actionable element. To continue with the task of navigating to the Accessibility settings, I need to tap on this highlighted option. Tap on the "Accessibility" option in the Settings menu to proceed to the next screen.

Action: Tap [0.44, 0.67]

Thought: To proceed with the task of adjusting display settings, I need to access the "Display & Text Size" menu. This requires interacting with the highlighted rectangular area, which likely contains options related to text size adjustments. Tap on the rectangular area associated with text size adjustments to open the Display & Text Size menu.


Action: Tap [0.47, 0.32]

Thought: This screen shows a settings interface with options to adjust text size. The "Larger Text" button is prominently displayed, and there's also the option to turn on "Larger Accessibility Sizes." This matches the description of an iPhone settings menu for adjusting display settings. To proceed with adjusting the text size as per the task instructions, I should tap on "Larger Text" button to access more options.

Action: Tap [0.48, 0.21]

Figure 11. Dataset example.

Share a Google Calendar or Event on Android

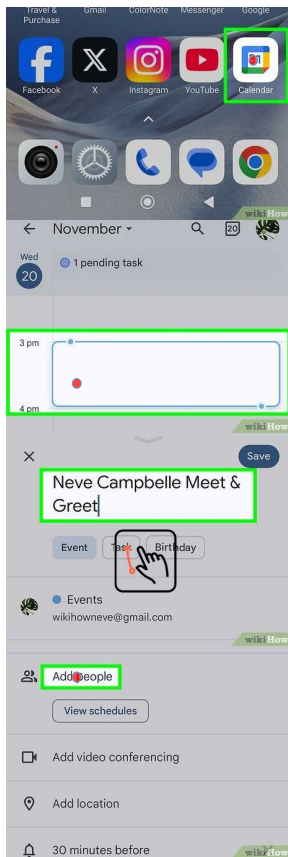

Thought: To open the Google Calendar app, I need to interact with its icon on the home screen. The icon is clearly visible and accessible, making it the next logical step to tap on it to launch the app. Tap on the "Calendar" app icon to open the Google Calendar application.

Action: Tap [0.88, 0.24]

Thought: To proceed with creating a new event, I need to tap on the highlighted empty box in the 3 PM slot. This Action will likely open a window or interface for adding details about the event, such as its title, time, and other specifics. Tap on the empty box outlined in red at 3 PM to initiate the process of creating a new event.

Action: Tap [0.26, 0.56]

Thought: To create a new event, I need to access the menu or interface that allows me to add event details. Since the current screen doesn't show any Active input fields or options for entering event information, swiping up is a logical step to reveal more options or navigate to the appropriate section for creating a new event. Swipe up on the screen to reveal additional options or navigation elements for creating a new event.


Action: Swipe [[0.46, 0.93], [0.44, 0.58]]

Thought: I need to tap on the "Add people" option to proceed with adding participants to the event. This is the logical next step as it will allow me to input email addresses for sharing the event. Tap on the "Add people" option highlighted in green.

Action: Tap [0.27, 0.14]

Figure 12. Dataset example.

Browse recipes for gluten-free chocolate chip cookies that can be made without nuts.

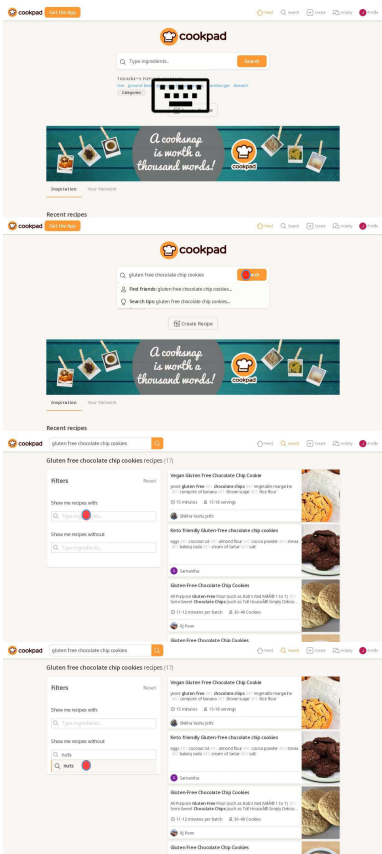

STEP1:

Thought: Type "gluten-free chocolate chip cookies" in the search bar to find relevant recipes.

Action: Type [0.45, 0.28]

STEP2:

Thought: Click the Search button to initiate the recipe search for gluten-free chocolate chip cookies.

Action: Click [0.68, 0.27]

STEP3:

Thought: Click on "Type ingredients..." to specify the ingredients needed for gluten-free chocolate chip cookies.

Action: Click [0.28, 0.37]


STEP4:

Thought: Click on the "nuts" option to filter recipes that exclude nuts.

Action: Click [0.28, 0.58]

Figure 13. Examples executed by TongUI.


Create a new watch list called AI Stocks

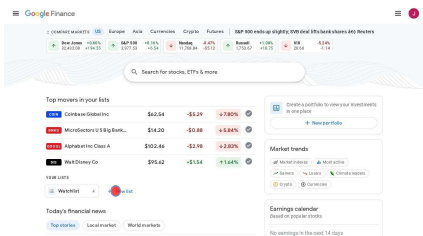

STEP1:

Thought: Click on "New list" to initiate the creation of a new watch list for AI Stocks.

Action: Click [0.28, 0.81]

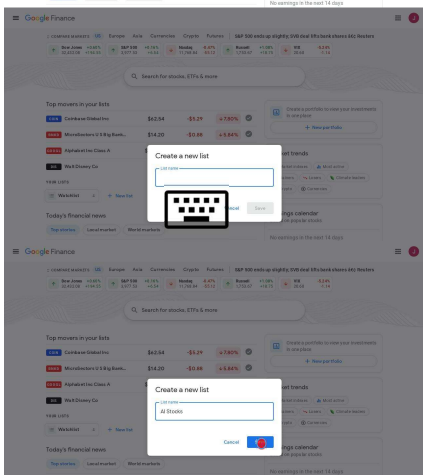

STEP2:

Thought: Type "AI Stocks" in the list name field to create a new watch list.

Action: Type [0.5, 0.73]


STEP3:

Thought: Click Save to finalize the creation of the new watch list named AI Stocks.

Action: Click [0.64, 0.85]

Figure 14. Examples executed by TongUI.

Install app "Google Play Games"



STEP1:

Thought: Scroll down to find the Google Play Store app for installing "Google Play Games."

Action: Scroll Down

STEP2:

Thought: Click the PLAY icon to access the Google Play Store for installing apps.

Action: Click [0.87, 0.18]

STEP3:



Thought: You clicked on "playwell" instead of "Google Play Games," leading to a different app installation page.

Action: Click [0.78, 0.07]

STEP4:

Thought: Click on "Search for apps &..." to access the search function for finding the Google Play Games app.

Action: Click [0.38, 0.07]



STEP5:

Thought: Type "Google Play Games" in the search bar to find the app for installation.

Action: Type "Google Play Games"

STEP6:

Thought: Click on "google play games" to select the app from the search results for installation.

Action: Click [0.44, 0.15]

STEP7:

Thought: Click Install to begin downloading the Google Play Games app from the GUI displayed on the screen.

Action: Click [0.85, 0.17]

STEP8:

Thought: You have successfully installed the "Google Play Games" app as indicated by its status shown on the screen.

Action: Finish

Figure 15. Examples executed by TongUI.

What's the news in Puerto Rico?



STEP1:

Thought: Press home to exit the current app and return to the main screen for easier access to news apps.


Action: PressHome



STEP2:

Thought: Type "news in puerto rico" in the search bar to find relevant information.

Action: Type "news in puerto rico"



STEP3:

Thought: Type the query in the search bar to find news articles about Puerto Rico.


Action: Type "": "



STEP4:

Thought: Click on "What's the news in Puerto Ri" to access relevant news articles about Puerto Rico.

Action: Click [0.47, 0.14]



STEP5:

Thought: Click on "Puerto Rico News: Current Events & Breaking News Today | AP News" to access the latest news articles.

Action: Click [0.38, 0.53]

STEP6:

Thought: You have successfully accessed the news section for Puerto Rico on the AP News website.

Action: Finish

Figure 16. Examples executed by TongUI.