
Low-hallucination Synthetic Captions for Large-Scale Vision-Language Model Pre-training

Xinsong Zhang*[†], Yarong Zeng*, Xinting Huang,

Hu Hu, Runquan Xie, Han Hu, and Zhanhui Kang

Hunyuan Team, Tencent

Abstract

In recent years, the field of vision-language model pre-training has experienced rapid advancements, driven primarily by the continuous enhancement of textual capabilities in large language models. However, existing training paradigms for multimodal large language models heavily rely on high-quality image-text pairs. As models and data scales grow exponentially, the availability of such meticulously curated data has become increasingly scarce and saturated, thereby severely limiting further advancements in this domain. This study investigates scalable caption generation techniques for vision-language model pre-training and demonstrates that large-scale low-hallucination synthetic captions can serve dual purposes: 1) acting as a viable alternative to real-world data for pre-training paradigms and 2) achieving superior performance enhancement when integrated into vision-language models through empirical validation. This paper presents three key contributions: 1) a novel pipeline for generating high-quality, low-hallucination, and knowledge-rich synthetic captions. Our continuous DPO methodology yields remarkable results in reducing hallucinations. Specifically, the non-hallucination caption rate on a held-out test set increases from 48.2% to 77.9% for a 7B-size model. 2) Comprehensive empirical validation reveals that our synthetic captions confer superior pre-training advantages over their counterparts. Across 15 vision language tasks, the model trained with our data achieves a significant performance gain of at least 6.2% compared to alt-text pairs and other previous work. In 20 common cognitive domains, the model trained with our data outperforms other counterparts by at least 6.8%. Meanwhile, it also offers considerable support in the text-to-image domain. With the support of our dataset, the FID score is reduced by 17.1 on a real-world validation benchmark and 13.3 on the MSCOCO validation benchmark. 3) We will release **Hunyuan-Recap100M**, a low-hallucination and knowledge-intensive synthetic caption dataset, which will enable breakthroughs in vision language pre-training, cross-modal generation, and related applications.

1 Introduction

With the enormous power of large language models, remarkable performance gains have recently been achieved in a variety of tasks in natural language processing (NLP), computer vision (CV), and also in cross-modal fields [Brown et al., 2020, Chung et al., 2022, Chowdhery et al., 2022, Touvron et al., 2023a, Dosovitskiy et al., 2021, Alayrac et al., 2022, Liu et al., 2023, Achiam et al., 2023, Wang et al., 2024b, Hurst et al., 2024]. The Large Language Model (LLM) and the Vision Language

Preprint. Under review.

*equal contribution

[†]Corresponding to: Xinsong Zhang <bertsyzhang@tencent.com>

Model (VLM) are usually equipped with Transformer [Vaswani et al., 2017] as the backbone and then pre-trained with a tremendous amount of unlabeled data. The strong representation ability of the model, the massive amount of data, and the effective means of training make the foundation models powerful for successfully solving the tasks of vision and language.

While text data has experienced exponential growth and fuels large language models, vision language model pre-training confronts a unique data bottleneck: high-quality text-image alignments remain scarce despite their critical role in training vision language models. Most traditional approaches to building large-scale multimodal datasets mainly rely on Web-based alt-text extraction [Sharma et al., 2018, Changpinyo et al., 2021, Ordonez et al., 2011, Schuhmann et al., 2021, 2022, Byeon et al., 2022, Gadre et al., 2023, Liu et al., 2022, Gu et al., 2022]. The web-based alt-text data typically undergoes a lengthy processing pipeline, involving stages such as text quality cleaning, image low-quality filtering, and cross-modal relevance validation, ultimately producing image-text pairs. Although significant data loss occurs at each processing stage and even with these efforts, the final output still suffers from inherent limitations including a low text informativeness density and partial relevance deficiencies between visual content and the corresponding descriptions. As the naturally existing image-text pair data is exhausted, and the quality of data produced by traditional image-text extraction methods drops significantly as the scale expands, the marginal effect they generate in the training of VLMs greatly diminishes. Therefore, new methods are needed to synthesize large-scale, high-quality multimodal data.

Recently, several exploratory investigations have been carried out in multi-modal synthetic data, which have, to some extent, demonstrated their positive impact on various cross-modal tasks [Li et al., 2023a, Betker et al., 2023, Yu et al., 2024, Li et al., 2024b]. However, there are significant defects in all of them, mainly reflected in the presence of many hallucinations (labeled in red) in the previous synthetic captions, and the captions are rather monotonous, lacking informative expressions. Therefore, in this paper, we focus on addressing two issues: 1. How to establish an effective pipeline for generating low-hallucination synthetic captions? 2. How can more valuable information be injected into synthetic captions to increase the information density of synthetic data?

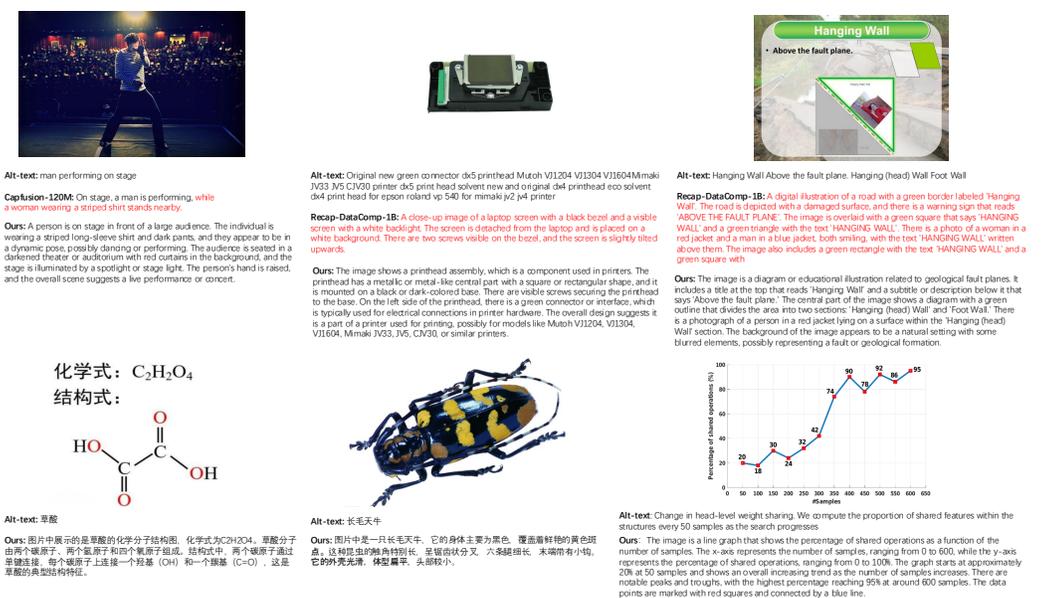


Figure 1: Examples of the original caption, previous synthetic caption and our synthetic caption.

How to establish an effective pipeline for generating low-hallucination synthetic captions? Large-scale synthetic captions inherently depend on robust tools, and vision language models emerge as a natural and fitting choice. However, hallucination is an inherent problem in the multimodal large language model [Bai et al., 2024]. As shown in Figure 1, the data in the Recap-DataComp-1B [Li et al., 2024b] dataset contains a significant amount of hallucinatory information. We further

demonstrate the harmfulness of a large amount of hallucinatory data in Section 4. The inevitable and most crucial issue in caption synthesis lies in resolving the hallucination problem. Existing work [Bai et al., 2024] has discussed the causes of hallucinations from the perspectives of data, model, training, and inference. During generation, as the length of the sequence grows, self-attention will focus more on previously generated text tokens, i.e., the attention to visual content is diluted [Wang et al., 2023b,a, 2024a, Huang et al., 2024]. We agree that hallucinations in VLMs are mainly caused by uncertainty in decoding visual-related intentions. Therefore, we propose the use of Direct Preference Optimization (DPO) method to eliminate hallucinations in synthesized captions by increasing the confidences of real visual contents and suppressing the confidences of hallucinatory visual contents. Fortunately, this method has proven to be highly effective. Furthermore, in the synthetic caption task, we reveal that DPO adheres to a significant scaling law within a specific data size range. Upon saturation, resampling can further elevate the quality of synthetic captions. As presented in Table 1, when applied to the same dataset, our method significantly enhances the non-hallucination rate, elevating it from 29.7% to 73.3%, in contrast to the approach used in Recap-DataComp-1B [Li et al., 2024b]. We elaborate on our hallucination evaluation metrics in Section 4.1 and the continuous DPO method in Section 3.

Dataset	# Length	# Details \uparrow	# None Hallucinations \uparrow	# Hallucination Rate \downarrow
Capfusion-120M	23.5	2.58	72.3%	14%
Our Method	80.4	6.9	73.9%	5.4%
Recap-DataComp-1B	49.41	6.95	29.7%	24.9%
Our Method	72.60	6.64	73.3%	5.64%
Hunyuan-Recap100M	103.15	8.1	77.9%	4.2%

Table 1: **A comparison between existing synthetic caption datasets and our proposed dataset in terms of the number of hallucinations and the hallucination rate.** Here, "Length" represents the average length of the caption, "Details" represents the average number of visual details that appear in each caption, "None Hallucinations" indicates the proportion of non-hallucinatory data in the overall data, and "hallucination rate" represents the proportion of hallucinations among all details. A total of 1,000 data samples were taken, and our method reports the corresponding results on the respective data with our synthetic caption pipeline respectively.

How can more valuable information be injected into synthetic captions to increase the information density of synthetic data? The answer to this question can be rather straightforward: infuse as much knowledge as possible into the caption via a well-trained VLM. The injection of knowledge into synthetic captions can be derived from two primary sources. The first source is external text, such as alt-text, that is relevant to the image, while the second source stems from world knowledge encapsulated within a VLM. Usually, a VLM model tends to provide captions that are vague but correct. Therefore, we need to train a VLM model so that it can fully integrate the knowledge in text and its own world knowledge, ultimately generating synthetic captions with high informational value. Specifically, in our methodology, we employ a powerful VLM, namely GPT-4o, in conjunction with a meticulously crafted prompt that encompasses detailed requirements. This combination is utilized to generate labeled data, with a particular emphasis on extracting and focusing on the key information embedded within alt-text. For instance, we focus more on the name of a specific entity, using oxalic acid as an illustration here. After that, we perform manually post-processing on obvious erroneous data to ensure that the labeled data is accurate, contains the key information, and excludes the noise in the injected information. Finally, we train an open source VLM model, specifically Qwen2-VL-7B, using the training data. For details of the prompt and data processing, see Section 3.

By comprehensively leveraging the aforementioned methods, we train a recaption model and utilize it to generate 100 million pieces of data. Our model has achieved a notable enhancement in the evaluation metrics for low-hallucination quantification. Moreover, we carried out a verification of the data’s validity. The results show that vision-language models pre-trained with Hunyuan-Recap100M exhibit substantially improved overall performance compared to those using alt-text data or conventional synthetic captions, particularly showing enhanced capabilities in perception tasks.

Our contributions are as follows.

- (1) We tackle the challenge of constructing a synthetic caption pipeline capable of generating captions that are both low in hallucination and rich in knowledge, thereby alleviating the scarcity of high-quality multimodal data essential for vision-language model pre-training.
- (2) We propose a series of effective methods, knowledge-enriching SFT and continuous DPO, to eliminate hallucinations and inject knowledge into synthetic captions. Eventually, we trained a recaption model, whose proportion of hallucination-free results far exceeds that of the existing best models. The proportion of hallucination-free results has increased from 48.2% to 77.9%. It also exhibits favorable performance in knowledge diversity, as reflected in a more accurate cognition of real-world entities.
- (3) We will release a high-quality synthetic caption dataset comprising 100M image-text pairs, **Hunyuan-Recap100M**, with the aim of fostering further advancements within the research community in areas like vision language model pre-training, text-to-image, and text-to-video generation.

2 Related Work

Vision-Language Model. Vision Language Models (VLMs) can be classified into two distinct categories. The first category consists of models that rely on dual encoders, specifically a vision encoder and a text encoder. These models are typically trained in a contrastive fashion and exhibit remarkable proficiency in tasks such as image recognition. Prominent examples within this group include CLIP [Radford et al., 2021], FLIP [Li et al., 2023b] and SigLIP [Zhai et al., 2023b]. The second category of methods focuses on aligning the visual modality with a Large Language Model (LLM). With the rapid development of LLM, the astonishing success of GPT [Brown et al., 2020, OpenAI, 2023], LLaMA [Touvron et al., 2023a,b, Grattafiori et al., 2024], and DeepSeek-LLM [Liu et al., 2024, Guo et al., 2025] has made the empowerment of large language models with visual perception an important and popular research direction. Flamingo [Alayrac et al., 2022] is the first large-scale vision language model, which aligns the visual encoder with a large language model. LLaVA [Liu et al., 2023] presents an instruction tuning methodology for training large multimodal models, thus charting the course for VLM training. Subsequent efforts have been made to refine the details of each module and continuously optimize the overall performance of the model [Wang et al., 2024b, Wu et al., 2024, McKinzie et al., 2024, Chen et al., 2024b, Liu et al., 2024]. Although, compared with former multimodal models [Zeng et al., 2021, Singh et al., 2021, Diao et al., 2022, Wang et al., 2022, Zhang et al., 2023a], current LLM based vision language models are much more powerful in terms of capabilities, there has not been much improvement in data utilization; they still rely on large-scale image-text pairs. Similarly, VLMs with dual encoders, as referred to in the first category above, also require large-scale image-text pair data. However, the data of the image-text pairs are gradually being exhausted [Villalobos et al., 2022]. The total amount of a large number of cleaned image-text pairs is fixed, and the expansion of data scale can hardly keep up with the requirements of model scaling. Therefore, despite the remarkable advancements achieved in the VLM training paradigm, the utilization of large-scale image-text pairs data has encountered certain limitations. To overcome this issue, a potential solution lies in synthetic data.

Synthetic data. Synthetic data has been extensively utilized in large language models, yielding remarkable results [Zhang et al., 2024, Shao et al., 2024, Zhu et al., 2024, Yang et al., 2024]. In addition, there is a growing presence of synthetic data within the multimodal domain. BLIP-2 [Li et al., 2023a] employs an image caption model to synthesize short captions to serve as substitutes for alt-text, and CapFusion [Yu et al., 2024] further enhances the quality of such data using large language models. However, the captions generated through this type of work tend to be rather simplistic, merely representing minor refinements of the original alt-text without adding substantial information value. Recap-DataComp-1B [Li et al., 2024b] aims to transform alt-text using vision language models, yet it encounters the issue that existing VLMs can produce severe hallucinations. Other works focused on dense captioning, such as Allava [Chen et al., 2024a] and Dense-Fusion-1M [Li et al., 2024c], are incapable of injecting rich knowledge in a targeted fashion and, on this basis, maintain relatively low levels of hallucination. In summary, knowledge injection and elimination of hallucinations are two key challenges in the realm of multimodal synthetic data. A significant amount of research has been dedicated to exploring the hallucination problem in VLMs, including aspects such as the causes underlying hallucinations and strategies for their elimination [Bai et al., 2024]. However, a comprehensive method that can simultaneously ensure content diversity and maximally eliminate hallucinations in the synthetic visual caption task remains elusive.

Our approach has achieved substantial advances in both hallucination elimination and knowledge injection. Ultimately, its efficacy has been demonstrated in the training of VLMs, establishing our caption dataset as a viable alternative for the large-scale training of vision language models. This eliminates the constraints imposed by the data scale and avoids the challenges associated with data quality degradation resulting from the expansion of the data scale.

3 Methodology

3.1 Continuous DPO

Reinforcement learning has been reported to be an effective method of eliminating hallucinations in Large Language Models (LLMs) [Zhang et al., 2023b, Huang et al., 2025]. Direct Preference Optimization (DPO) [Rafailov et al., 2023] emerges as a reinforcement learning based fine-tuning paradigm for LLM that directly optimizes preference data, effectively mitigating harmful content generation, such as hallucinations. Consequently, the application of DPO to mitigate hallucinations in image captions appears to be a natural and logical approach. The optimization objectives of the DPO algorithm are shown in Equation 1 and Equation 2. As noted in Rafailov et al. [2023], the loss function gradient \mathcal{L}_{DPO} increases the probability of preferred completions y_w while simultaneously reducing the probability of dispreferred completions y_l . Intuitively, by maximizing the probability of samples free of hallucinations and minimizing the probability of samples containing hallucinations, our recaption model can generate captions that are as free from uncertainty and potential hallucinations as possible.

$$\mathcal{L}_{\text{DPO}} = -\mathbb{E}_{(x, y_w, y_l) \sim \mathcal{D}} \left[\log \sigma \left(\beta \log \frac{\pi_{\theta}(y_w|x)}{\pi_{\text{ref}}(y_w|x)} - \beta \log \frac{\pi_{\theta}(y_l|x)}{\pi_{\text{ref}}(y_l|x)} \right) \right] \quad (1)$$

$$\begin{aligned} \nabla_{\theta} \mathcal{L}_{\text{DPO}}(\pi_{\theta}; \pi_{\text{ref}}) = & \\ -\beta \mathbb{E}_{(x, y_w, y_l) \sim \mathcal{D}} & \left[\underbrace{\sigma(\hat{r}_{\theta}(x, y_l) - \hat{r}_{\theta}(x, y_w))}_{\text{higher weight when reward estimate is wrong}} \left[\underbrace{\nabla_{\theta} \log \pi(y_w | x)}_{\text{increase likelihood of } y_w} - \underbrace{\nabla_{\theta} \log \pi(y_l | x)}_{\text{decrease likelihood of } y_l} \right] \right], \end{aligned} \quad (2)$$

where $\hat{r}_{\theta}(x, y) = \beta \log \frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)}$ is the reward implicitly defined by the language model π_{θ} and the reference model π_{ref} .

However, in our task, the DPO algorithm does not demonstrate continuous performance improvement with respect to scale. Specifically, after initial rapid scaling up of performance, its performance plateaus, as illustrated in Figure 4. We turn our attention back to Equation 2. Here, the examples are weighted according to how much higher the implicit reward model $\hat{r}_{\theta}(x, y)$ rates the dispreferred completions. As we continuously expand the scale of the DPO data, the implicit reward $\hat{r}_{\theta}(x, y)$, which serves as the optimization weight, does not change significantly. Consequently, after reaching a local optimum, the model ceases to optimize further. Therefore, we make slight modifications to the DPO algorithm and propose Continuous DPO (CDPO). Once the performance reaches a bottleneck phase, we switch to a different reference model, resample data using the current model, adjust the implicit reward model $\hat{r}_{\theta}(x, y)$ accordingly, and then re-optimize π_{θ} . Furthermore, when CDPO training with preference data is performed, in order to prevent the sample length from serving as a learning signal (e.g., where longer captions may contain more hallucinations), we conduct an additional sequence-length balancing operation on the samples. This ensures that the average lengths of the positive and negative samples are close to each other.

3.2 Knowledge-enriching SFT

Previous recaption models (e.g. [Li et al., 2023a, Yu et al., 2024]) often produce generalized and imprecise descriptions, such as "a man performing on stage" in Figure 1. This type of descriptive information has limited informational value and offers little assistance in training vision language models. Hence, in our work, we place significant emphasis on the integration of valuable information. We believe that valuable information is mainly reflected in two aspects: one is the richness of

descriptive details and the other is the knowledge content of the description. The former is easy to understand, while the latter is manifested in the supplementation of external knowledge related to the image. For example, in Figure 1, in the case of "oxalic acid", we hope to describe it as follows: *The image shows the molecular chemical structure of oxalic acid, with the chemical formula $C_2H_2O_4$. The oxalic acid molecule consists of two carbon atoms, two hydrogen atoms, and four oxygen atoms. In the structural formula, the two carbon atoms are connected by single bonds, and each carbon atom is attached to a hydroxyl group (OH) and a carbonyl group (C = O), which are the typical structural features of oxalic acid.*

Please describe the content of the image in detail with one paragraph, let's proceed step by step:

Step 1: Please describe the content of the image accurately and specifically in one paragraph, avoiding subjective comments (such as "gives a sense of tranquility"). **Entities/knowledge** directly related to the image content (**such as "Eiffel Tower" instead of "a metal tower"**) should be included in the description. Ensure semantic correctness and fluency of the sentences, and the length of the returned description text should be more than 50 words.

Step 2: Please refer to the image title to improve the description from Step 1. **If the image title contains specific place names, personal names, IP names, etc., and these can be inferred from the image, please add them to the description.** If these details cannot be inferred from the image, do not add them. Do not mention the source of the information in the improved description, and do not include phrases like "image title".

Step 3: Explain the changes made in the description from Step 2.

Please return the result in the following JSON format:

```
{
  "caption": "the caption",
  "improved_caption": "the improved caption",
  "explanation": "the reason to make the change"
}
```

Image Title: **a man fishing at sunset on a lake with his guide**

Figure 2: A **GPT-4o prompt** designed to construct image captions rich in descriptive details. In the prompt, the red-highlighted portion lays stress on the methodology of knowledge injection. Furthermore, it guarantees that the ultimately generated caption incorporates a rich body of world knowledge via a two-step procedure.

By constructing SFT data, captions rich in descriptive details can be generated, enabling the model to learn to produce longer captions that contain as much specific information as possible through fine-tuning. Therefore, we carefully constructed a complex prompt and obtained training data using GPT-4o, see Section 3.3. Note that although GPT-4o can understand the requirements of the prompt, the output data still contain a substantial amount of hallucinations. As a result, we perform a manual review. Moreover, to incorporate knowledge into captions more effectively, we screened the original image-text pairs. In addition to general alt-text, we selected object-related data with a higher informational value³. This allows the descriptions in the captions to focus more on specific object descriptions, such as the "tragocephala pretiosa" in Figure 1. After reinforcement of the above two aspects, we construct knowledge-enhanced supervised fine-tuning data capable of supporting the training of image captions with rich content.

3.3 Training Pipeline

As mentioned above, our comprehensive training pipeline consists of two sequential stages: knowledge-enriching SFT followed by continuous DPO. In this section, we introduce these stages

³In our study, we primarily regulate this aspect through the meticulous selection of alt-text data sources. For example, we deliberately choose a diverse range of encyclopedia data

specifically. The general pipeline of our work is shown in Figure 3. We adopt Qwen2-VL-7B [Wang et al., 2024b] as the base model and use the LLaMA Factory [Zheng et al., 2024] platform to carry out the overall training process.

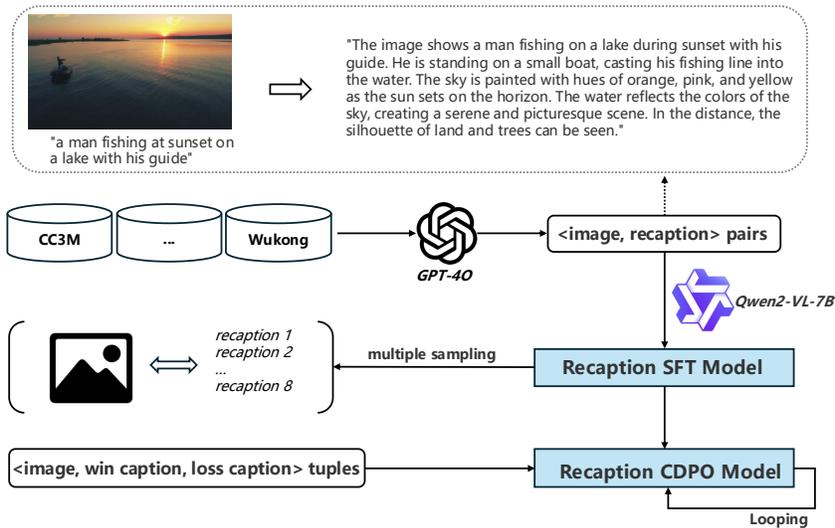


Figure 3: The illustration of our recaptioning pipeline

Knowledge-enriching SFT. We sampled raw image-text pairs from open-source multimodal datasets including CC3M [Sharma et al., 2018], CC12M [Changpinyo et al., 2021], Datacamp [Gadre et al., 2023] Wukong [Gu et al., 2022], and Wikipedia [Srinivasan et al., 2021]. Using the prompt shown in Figure 2, we employed GPT-4o to extract the image-plaintext-caption data. Following a meticulous manual review process, 43,408 data entries were retained. Subsequently, we performed LoRA fine-tuning on the Qwen2-VL-7B model. Specifically, the learning rate was set at $1.0e - 5$, the global batch size was configured as 128, and the number of training epochs was established at 10. Through this process, we eventually acquired our Recaption-SFT model.

Continuous DPO. As outlined in Section 3.1, our methodology begins with training a DPO intermediate model. We first randomly sample 300,000 image-text pairs and then employ the Recaption-SFT model for inference. To induce controlled stochasticity, we systematically modulate three sampling hyperparameters, $TOPP=1.0$, $TOPK=20$, and $TEMPERATURE=1.0$. Each image-text pair undergoes eight parallel inference iterations, thereby generating eight divergent candidates. We construct preference-ordered pairs by selecting the best and worst outputs from each set with a critic model⁴.

To eliminate length-induced training bias, we implement length-balanced sampling that retains 218k high-quality pairs, enforcing alignment of length distribution between positive and negative samples. Ultimately, the curated dataset was used for DPO training on the Recaption-SFT model, resulting in the DPO intermediate model.

Upon acquiring the intermediate model, we further sampled 200k data instances from the data sources and used this intermediate model to generate preference data with the same hyperparameters and the judge pipeline. Following the length-balancing strategy, we ultimately retained 139k data instances for continuous DPO training. All hyperparameters at different stages are listed in Table 2.

⁴It is an in-house expert system that primarily makes point-by-point judgments by dissecting the details in captions and then assesses the hallucination level of the details. The main pipeline is similar to that of Section 4.1, but it does not use GPT-4o

	Stage-1-SFT	Stage-2-DPO	Stage-2.5-CDPO
Resolution # pixels	[3136, 12845056]	[3136, 12845056]	[3136, 12845056]
Dataset # Samples	43K	218K	139K
Finetuning Type	LoRA	LoRA	LoRA
Batch Size	128	64	64
Learning Rate	$1e-5$	$5e-6$	$5e-6$
Learning Epoch	10	1	1

Table 2: **Detailed configuration for each training stage of our recaption model.** The table outlines the progression of vision parameters, dataset characteristics, model specifications and training hyperparameters.

4 Experiments

This section outlines our quality assessment criteria for recaption data and elaborates on our work from two aspects: the intrinsic quality of the dataset and its effectiveness in large-scale vision language model pre-training.

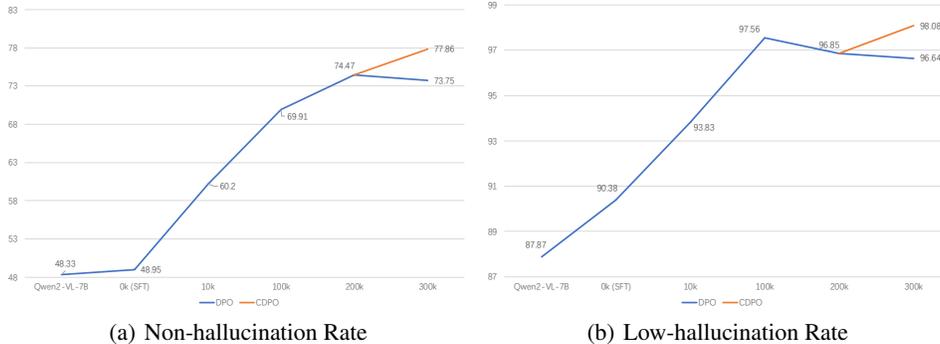


Figure 4: **Performance of different DPO strategies.** The horizontal axis represents the scale of the training data, and the vertical axis represents the proportion of hallucination-free captions on the validation set (in percentage). The CDPO strategy uses the same training data as DPO in the early stage of training and resamples 139k new data after training 218k data.

4.1 Evaluation Metrics

We believe that the quality measurement of recaption data encompasses two aspects. One is the assessment of harmful information, namely hallucinations. This information should be minimized as much as possible. The other aspect is the measurement of content richness, which can usually be verified by the effectiveness of model training. Therefore, in terms of the quality of the recaption data itself, we pay more attention to the indicators of hallucinations, while the measurement of its richness will be reflected through the training effect of large-scale vision language models in Section 4.3. We take advantage of the hallucination assessment method of CIEM [Hu et al., 2023] and leverage the existing large language model, GPT-4o, to decompose potential detailed elements within the caption. Subsequently, we use GPT-4o to make judgments about the presence of hallucinations. Finally, we count the number of hallucinations in a caption. We define the proportion of captions that do not contain hallucinatory details as the **non-hallucination rate**, and the proportion of captions that contain at most two hallucinatory details as the **low-hallucination rate**.

4.2 Performance of Recaption Model

We first report the evaluation results of our recaption model on open-source data, which come mainly from Wukong [Gu et al., 2022]. As illustrated in Figure 4, the base model (Qwen2-VL-7B) exhibits a considerably severe level of hallucination. Specifically, its non-hallucination rate (48.33%) and low-hallucination rate (87.87%) are quite low. Following Supervised Fine-Tuning, the low-hallucination rate increases significantly. Subsequently, with the application of DPO, both

the non-hallucination rate and the low-hallucination rate are substantially improved, by 34.03% and 10.21%, respectively. Furthermore, we observe that DPO demonstrates a notable scaling law during the initial stage of the recaption task. However, the performance plateaus once the data size attains a certain scale. Our CDPO algorithm can further enhance both the non-hallucination rate (by +3.4%) and the low-hallucination rate (by +0.5%).

Meanwhile, we also use our model to infer on the same image-text pairs as other recaption works, e.g. Capfusion [Yu et al., 2024] and Recap-DataComp-1B [Li et al., 2024b], and report the results in Table 1. For the same original alt-text data, the recaption data generated by our model contain significantly more details than that of Capfusion and have much fewer hallucinations than Recap-DataComp-1B. Specifically, when dealing with the same data, compared to Capfusion, the number of details in the captions of our model increases by 267%, the average length of our captions is 3.5 times longer than that of Capfusion, and the rate of hallucinatory details decreases by 8.6%. Moreover, compared to Recap-DataComp-1B, the non-hallucination rate increases by 43.6%. Note that since the length of captions in Capfusion is short, its non-hallucination rate is quite high. However, because of the lack of details, its value is limited.

Dataset	MathVista testmini	Scientific QA			OCRBench test	OCR QA				Benchmark QA				Hallucination Tasks		Avg.
		MMMU val	A12D test	ScienceQA test		DocVQA val	TextVQA val	InfographicsVQA val	ChartQA test (avg./num.)	MMBench en-dev	MMStar test	RealworldQA test	MMVet test	HallusionBench test	None-Hallu. Rate	
Alt-text(20M)	42.20	42.24	67.06	81.75	49.0	65.01	55.97	31.17	46.92	67.96	44.27	57.12	43.81	34.29	68.38	53.12
Recap-DataComp-1B(20M)	51.40	43.33	68.60	86.27	55.8	46.90	64.75	33.52	53.16	66.58	48.46	58.85	39.66	29.84	53.79	52.07
Hunyuan-Recap100M(20M)	52.50	44.27	73.59	85.82	57.3	66.27	72.59	42.47	57.00	72.77	50.13	60.26	46.02	35.45	73.87	59.35
Hunyuan-Recap100M*	45.10	43.56	73.19	85.92	<u>65.80</u>	<u>66.30</u>	72.42	<u>44.66</u>	56.0	<u>74.83</u>	49.13	<u>64.44</u>	<u>49.00</u>	34.60	72.61	<u>59.83</u>
Alt-text(20M)*	50.10	45.0	73.18	85.57	59.8	77.34	68.47	43.99	62.08	72.42	47.89	61.57	42.09	33.80	39.27	57.50
Recap-DataComp-1B(20M)*	53.70	44.44	74.65	86.12	62.1	79.11	66.39	45.38	64.28	65.89	50.44	61.96	39.34	32.77	43.62	58.01
Hunyuan-Recap100M(20M)*	56.20	44.00	77.91	89.74	66.9	83.06	71.37	50.32	68.96	72.34	54.66	65.49	43.17	36.38	71.86	63.42
Hunyuan-Recap100M*	48.80	<u>45.22</u>	77.45	87.90	65.7	<u>83.92</u>	<u>75.09</u>	51.83	65.76	<u>74.31</u>	54.62	<u>69.67</u>	<u>45.17</u>	36.45	70.65	<u>63.51</u>

Table 3: **Experimental results on 15 vision-language tasks.** Avg. is the average score of all vision-language tasks. The None-Hallu. Rate is a hallucination assessment metric introduced in Section 4.1. We randomly sampled 1000 pieces of DataCamp data to evaluate the level of hallucination. The text in bold represents the optimal performance for the task under the 20M setting, whereas the text with an underline signifies further enhancement when the entire dataset is utilized. The * indicates that a unified lite supervised fine-tuning (SFT) [Wang et al., 2023c, Li et al., 2024a] has been performed on the basis of pre-training. Note that our main purpose is to verify the impact of different caption datasets on the training of VLM models. Therefore, the above results are comparative experiments conducted under a fixed data setting (20M) without carefully supervised fine-tuning and reinforcement learning and are not comparable to SOTA models.

4.3 Performance of Recaption Data

We validate the effectiveness of Hunyuan-Recap100M in two scenarios, vision-language model pre-training and text-to-image generation. This validation is conducted primarily from the viewpoints of model training efficacy, hallucination levels, and knowledge coverage.

Vision-Language Model Pre-Training. We first validate the effectiveness of our data set in the pre-training of vision language models. The aim is to demonstrate that, compared to alt-text and other recaption data available on the market, Hunyuan-Recap100M can better assist in the training of vision language models and achieve better performance in both general open source multimodal tasks and in-house knowledge-related test sets. In the VLM framework, we select the LLaVA [Liu et al., 2023] architecture, with SigLIP [Zhai et al., 2023a] as visual encoder and Hunyuan-7B as the base large language model. To make a fair comparison of the impact of caption data, we sample 20M data points from alt-text/recaption data. Note that the alt-text group experiment uses the same images as Hunyuan-Recap100M, while Recap-Datacomp-1B uses randomly sampled data⁵. As shown in Table 3, on 15 open source multimodal tasks, the VLM model trained with Hunyuan-Recap100M significantly outperforms those trained with alt-text or Recap-Datacomp-1B. Especially in hallucination-related tasks, Hunyuan-Recap100M shows a substantial lead over Recap-Datacomp-1B. Additionally, we evaluated the model’s convergence behavior through loss function monitoring. When using identical supervised fine-tuning datasets, models pre-trained with Hunyuan-Recap100M demonstrated markedly improved convergence properties.

In addition, to further measure the improvement in the perceptible level of the VLM caused by Hunyuan-Recap100M, we manually collected pictures with different visual characteristics from 20

⁵Since our data has undergone knowledge screening, its distribution is not exactly the same as that of DataCamp

domains, including animals, plants, clothing, landmarks, etc., totaling 1,197 pieces of data with manually annotated labels. We conducted an evaluation of the perceptive ability of the VLM in this set of data and the results are shown in Table 4. The VLM model trained with Hunyuan-Recap100M significantly outperforms other counterparts in 18 of the 20 categories. In general, it brings at least a 6.8% improvement on average. After fully applying Hunyuan-Recap100M, the model has shown significant improvements in 17 of 20 perception tasks, with an additional average improvement of 9%.

Dataset	Life	Landmark	Celebrity	Food	Cloth	Good	Game	Traffic	Art	Festival	Moive	Icon	Animal	Plant	Vegetables	Sport	Medical	Military	Tool	History	Avg.
Alt-text(20M)	34.1	35.9	23.4	22.4	26.2	22.7	24.5	34.5	23.3	27.1	25.5	27.5	54.2	27.3	22.2	65.5	32.6	29.4	20	27.3	30.0
Recap-DataComp-1B(20M)	13.6	19.7	18.9	4.5	29.9	23.2	21.6	33.9	12.2	10.0	12.7	17.0	49.2	13.6	13.1	57.9	19.6	19.6	30.4	17.6	21.8
Hunyuan-Recap100M(20M)	25.0	38.1	26.3	28.4	35.4	41.2	36.5	62.5	25.0	18.5	33.3	40.4	60.7	31.8	31.7	72.4	27.3	34.0	36.5	31.4	36.8
Hunyuan-Recap100M	<u>40.0</u>	<u>44.3</u>	<u>39.0</u>	<u>34.4</u>	<u>53.8</u>	38.1	<u>51.9</u>	<u>63.6</u>	<u>27.5</u>	<u>35.1</u>	31.5	<u>51.0</u>	<u>66.1</u>	<u>50.7</u>	<u>50.8</u>	<u>79.3</u>	<u>46.3</u>	<u>39.6</u>	36.4	<u>38.2</u>	<u>45.8</u>

Table 4: **Experimental results on identification of 20 common vision object categories.** The text in bold represents the optimal performance for the task under the 20M setting, whereas the text with an underline signifies further enhancement when the entire dataset is utilized.

Text-to-Image Model Training We also verify the effectiveness of Hunyuan-Recap100M on the text-to-image generation task. We perform fine-tuning on the technical stack of Hunyuan-DiT [Li et al., 2024d] in order to demonstrate that our data can help generate specific visual images. As evidenced in Table 5, the publicly released Hunyuan-DiT model can significantly achieve a lower FID and a higher CLIP score on the MSCOCO dataset, as well as our internal perceptual test, when using our recaption data. Furthermore, after fine-tuning the data with Hunyuan-Recap100M, there is a further improvement in both the FID and the CLIP Score. This finding indicates that our data can offer considerable assistance in the realm of world perception and also enable text-to-image models to achieve better performance in terms of authenticity. We present realistic cases in Section B.

Dataset	FID↓			CLIP Score↑		
	Row Caption	Our Recaption	Fine-tuning with Our Recaption	Row Caption	Our Recaption	Fine-tuning with Our Recaption
perceptive Test Set	62.38	49.13	45.33	0.323	0.344	0.357
MSCOCO Test set	28.79	21.09	15.46	0.307	0.305	0.313

Table 5: **Text-to-Image Evaluation** of Hunyuan-DiT on our internal perceptual test and MSCOCO-30K, w/wo fine-tuned with our recaption data. Note that, due to computational resource limitations, we only sampled 2M data from Hunyuan-Recap100M for LoRA fine-tuning.

5 Conclusion and Limitation

5.1 Conclusion

In this work, we tackle the issue of synthesizing captions that are rich in knowledge and exhibit low levels of hallucination. We present a novel pipeline for high-quality synthetic captions, featuring two effective techniques: continuous DPO and knowledge-enriching SFT. We elucidate the beneficial role of DPO in alleviating hallucinations within image captions, along with its scaling law within a certain scope. Furthermore, we propose an approach to continually improve model performance once the scaling law ceases to be effective. Experimental results demonstrate that Hunyuan-Recap100M outperforms original alt-text and other synthetic captions in the pre-training of vision language models by a large margin. We will make Hunyuan-Recap100M publicly available to promote the development of multimodal related fields in the open source community.

Limitations. Like most of the existing work on vision language models, the entire project consumed a lot with high electricity costs, although we only tested a 7B size model on 100M training data. Due to limited computing power, we did not scale up the use of recaption data to a large extent in this paper. We leave this work for future research. We also did not verify the effectiveness of the large-scale recaption data we generated for training text-to-image models from scratch. This will also be considered as future work.

Potential Risks. The original image-text pairs are mainly derived from open source datasets. Although we have taken measures to detoxify to a great extent, there are still potential risks, especially in the field of image generation, such as fake portraits on social media [Hill and White, 2020], which is a common potential risk in image generation research.

References

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katie Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *arXiv preprint arXiv:2204.14198*, 2022.
- Zechen Bai, Pichao Wang, Tianjun Xiao, Tong He, Zongbo Han, Zheng Zhang, and Mike Zheng Shou. Hallucination of multimodal large language models: A survey. *arXiv preprint arXiv:2404.18930*, 2024.
- James Betker, Gabriel Goh, Li Jing, Tim Brooks, Jianfeng Wang, Linjie Li, Long Ouyang, Juntang Zhuang, Joyce Lee, Yufei Guo, et al. Improving image generation with better captions. *Computer Science*. <https://cdn.openai.com/papers/dall-e-3.pdf>, 2(3):8, 2023.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In Hugo Larochelle, Marc’Aurelio Ranzato, Raia Hadsell, Maria-Florina Balcan, and Hsuan-Tien Lin, editors, *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*, 2020. URL <https://proceedings.neurips.cc/paper/2020/hash/1457c0d6bfc4967418bfb8ac142f64a-Abstract.html>.
- Minwoo Byeon, Beomhee Park, Haecheon Kim, Sungjun Lee, Woonhyuk Baek, and Saehoon Kim. Coyo-700m: Image-text pair dataset. <https://github.com/kakaobrain/coyo-dataset>, 2022.
- Soravit Changpinyo, Piyush Sharma, Nan Ding, and Radu Soricut. Conceptual 12m: Pushing web-scale image-text pre-training to recognize long-tail visual concepts. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2021.
- Guiming Hardy Chen, Shunian Chen, Ruifei Zhang, Junying Chen, Xiangbo Wu, Zhiyi Zhang, Zhihong Chen, Jianquan Li, Xiang Wan, and Benyou Wang. Allava: Harnessing gpt4v-synthesized data for lite vision-language models. *arXiv preprint arXiv:2402.11684*, 2024a.
- Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 24185–24198, 2024b.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. Palm: Scaling language modeling with pathways. *ArXiv preprint*, abs/2204.02311, 2022. URL <https://arxiv.org/abs/2204.02311>.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. Scaling instruction-finetuned language models. *arXiv preprint arXiv:2210.11416*, 2022.
- Shizhe Diao, Wangchunshu Zhou, Xinsong Zhang, and Jiawei Wang. Prefix language models are unified modal learners. *arXiv preprint arXiv:2206.07699*, 2022.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net, 2021. URL <https://openreview.net/forum?id=YicbFdNTTy>.

- Samir Yitzhak Gadre, Gabriel Ilharco, Alex Fang, Jonathan Hayase, Georgios Smyrnis, Thao Nguyen, Ryan Marten, Mitchell Wortsman, Dhruva Ghosh, Jieyu Zhang, et al. Datacomp: In search of the next generation of multimodal datasets. *Advances in Neural Information Processing Systems*, 36: 27092–27112, 2023.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Jiaxi Gu, Xiaojun Meng, Guansong Lu, Lu Hou, Niu Minzhe, Xiaodan Liang, Lewei Yao, Runhui Huang, Wei Zhang, Xin Jiang, et al. Wukong: A 100 million large-scale chinese cross-modal pre-training benchmark. *Advances in Neural Information Processing Systems*, 35:26418–26431, 2022.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- Kashmir Hill and Jeremy White. Designed to deceive: Do these people look real to you. *The New York Times*, 11, 2020.
- Hongyu Hu, Jiyuan Zhang, Minyi Zhao, and Zhenbang Sun. Ciem: Contrastive instruction evaluation method for better instruction tuning. *arXiv preprint arXiv:2309.02301*, 2023.
- Lei Huang, Weijiang Yu, Weitao Ma, Weihong Zhong, Zhangyin Feng, Haotian Wang, Qianglong Chen, Weihua Peng, Xiaocheng Feng, Bing Qin, et al. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions. *ACM Transactions on Information Systems*, 43(2):1–55, 2025.
- Qidong Huang, Xiaoyi Dong, Pan Zhang, Bin Wang, Conghui He, Jiaqi Wang, Dahua Lin, Weiming Zhang, and Nenghai Yu. Opera: Alleviating hallucination in multi-modal large language models via over-trust penalty and retrospection-allocation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13418–13427, 2024.
- Aaron Hurst, Adam Lerer, Adam P Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Ostrom, Akila Welihinda, Alan Hayes, Alec Radford, et al. Gpt-4o system card. *arXiv preprint arXiv:2410.21276*, 2024.
- Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Peiyuan Zhang, Yanwei Li, Ziwei Liu, et al. Llava-onevision: Easy visual task transfer. *arXiv preprint arXiv:2408.03326*, 2024a.
- Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. *arXiv preprint arXiv:2301.12597*, 2023a.
- Xianhang Li, Haoqin Tu, Mude Hui, Zeyu Wang, Bingchen Zhao, Junfei Xiao, Sucheng Ren, Jieru Mei, Qing Liu, Huangjie Zheng, et al. What if we recaption billions of web images with llama-3? *arXiv preprint arXiv:2406.08478*, 2024b.
- Xiaotong Li, Fan Zhang, Haiwen Diao, Yueze Wang, Xinlong Wang, and LINGYU DUAN. Densefusion-1m: Merging vision experts for comprehensive multimodal perception. *Advances in Neural Information Processing Systems*, 37:18535–18556, 2024c.
- Yanghao Li, Haoqi Fan, Ronghang Hu, Christoph Feichtenhofer, and Kaiming He. Scaling language-image pre-training via masking. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 23390–23400, 2023b.
- Zhimin Li, Jianwei Zhang, Qin Lin, Jiangfeng Xiong, Yanxin Long, Xincheng Deng, Yingfang Zhang, Xingchao Liu, Minbin Huang, Zedong Xiao, Dayou Chen, Jiajun He, Jiahao Li, Wenyue Li, Chen Zhang, Rongwei Quan, Jianxiang Lu, Jiabin Huang, Xiaoyan Yuan, Xiaoxiao Zheng, Yixuan Li, Jihong Zhang, Chao Zhang, Meng Chen, Jie Liu, Zheng Fang, Weiyang Wang, Jinbao Xue, Yangyu Tao, Jianchen Zhu, Kai Liu, Sihuan Lin, Yifu Sun, Yun Li, Dongdong Wang, Mingtao

- Chen, Zhichao Hu, Xiao Xiao, Yan Chen, Yuhong Liu, Wei Liu, Di Wang, Yong Yang, Jie Jiang, and Qinglin Lu. Hunyuan-dit: A powerful multi-resolution diffusion transformer with fine-grained chinese understanding, 2024d.
- Aixin Liu, Bei Feng, Bing Xue, Bingxuan Wang, Bochao Wu, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, et al. Deepseek-v3 technical report. *arXiv preprint arXiv:2412.19437*, 2024.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *arXiv preprint arXiv:2304.08485*, 2023.
- Yulong Liu, Guibo Zhu, Bin Zhu, Qi Song, Guojing Ge, Haoran Chen, GuanHui Qiao, Ru Peng, Lingxiang Wu, and Jinqiao Wang. Taisu: A 166m large-scale high-quality dataset for chinese vision-language pre-training. *Advances in Neural Information Processing Systems*, 35:16705–16717, 2022.
- Brandon McKinzie, Zhe Gan, Jean-Philippe Fauconnier, Sam Dodge, Bowen Zhang, Philipp Dufter, Dhruvi Shah, Xianzhi Du, Futang Peng, Anton Belyi, et al. Mm1: methods, analysis and insights from multimodal llm pre-training. In *European Conference on Computer Vision*, pages 304–323. Springer, 2024.
- OpenAI. Gpt-4 technical report, 2023.
- Vicente Ordonez, Girish Kulkarni, and Tamara L. Berg. Im2text: Describing images using 1 million captioned photographs. In John Shawe-Taylor, Richard S. Zemel, Peter L. Bartlett, Fernando C. N. Pereira, and Kilian Q. Weinberger, editors, *Advances in Neural Information Processing Systems 24: 25th Annual Conference on Neural Information Processing Systems 2011. Proceedings of a meeting held 12-14 December 2011, Granada, Spain*, pages 1143–1151, 2011. URL <https://proceedings.neurips.cc/paper/2011/hash/5dd9db5e033da9c6fb5ba83c7a7e99-Abstract.html>.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In Marina Meila and Tong Zhang, editors, *Proceedings of the 38th International Conference on Machine Learning, ICML 2021, 18-24 July 2021, Virtual Event*, volume 139 of *Proceedings of Machine Learning Research*, pages 8748–8763. PMLR, 2021. URL <http://proceedings.mlr.press/v139/radford21a.html>.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36:53728–53741, 2023.
- Christoph Schuhmann, Richard Vencu, Romain Beaumont, Robert Kaczmarczyk, Clayton Mullis, Aarush Katta, Theo Coombes, Jenia Jitsev, and Aran Komatsuzaki. Laion-400m: Open dataset of clip-filtered 400 million image-text pairs. *arXiv preprint arXiv:2111.02114*, 2021.
- Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. *arXiv preprint arXiv:2210.08402*, 2022.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Y Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Piyush Sharma, Nan Ding, Sebastian Goodman, and Radu Soricut. Conceptual captions: A cleaned, hypernymed, image alt-text dataset for automatic image captioning. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2556–2565, Melbourne, Australia, 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1238. URL <https://aclanthology.org/P18-1238>.

- Amanpreet Singh, Ronghang Hu, Vedanuj Goswami, Guillaume Couairon, Wojciech Galuba, Marcus Rohrbach, and Douwe Kiela. Flava: A foundational language and vision alignment model. *ArXiv preprint*, abs/2112.04482, 2021. URL <https://arxiv.org/abs/2112.04482>.
- Krishna Srinivasan, Karthik Raman, Jiecao Chen, Michael Bendersky, and Marc Najork. Wit: Wikipedia-based image text dataset for multimodal multilingual machine learning. In *Proceedings of the 44th international ACM SIGIR conference on research and development in information retrieval*, pages 2443–2449, 2021.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023a.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023b.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In Isabelle Guyon, Ulrike von Luxburg, Samy Bengio, Hanna M. Wallach, Rob Fergus, S. V. N. Vishwanathan, and Roman Garnett, editors, *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 5998–6008, 2017. URL <https://proceedings.neurips.cc/paper/2017/hash/3f5ee243547dee91fbd053c1c4a845aa-Abstract.html>.
- Pablo Villalobos, Anson Ho, Jaime Sevilla, Tamay Besiroglu, Lennart Heim, and Marius Hobbahn. Will we run out of data? limits of llm scaling based on human-generated data. *arXiv preprint arXiv:2211.04325*, 2022.
- Bin Wang, Fan Wu, Xiao Han, Jiahui Peng, Huaping Zhong, Pan Zhang, Xiaoyi Dong, Weijia Li, Wei Li, Jiaqi Wang, et al. Vigc: Visual instruction generation and correction. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 5309–5317, 2024a.
- Junyang Wang, Yuhang Wang, Guohai Xu, Jing Zhang, Yukai Gu, Haitao Jia, Ming Yan, Ji Zhang, and Jitao Sang. An llm-free multi-dimensional benchmark for mllms hallucination evaluation. *CoRR*, 2023a.
- Junyang Wang, Yiyang Zhou, Guohai Xu, Pengcheng Shi, Chenlin Zhao, Haiyang Xu, Qinghao Ye, Ming Yan, Ji Zhang, Jihua Zhu, et al. Evaluation and analysis of hallucination in large vision-language models. *arXiv preprint arXiv:2308.15126*, 2023b.
- Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, et al. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024b.
- Weihan Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Xixuan Song, Jiazheng Xu, Bin Xu, Juanzi Li, Yuxiao Dong, Ming Ding, and Jie Tang. Cogvlm: Visual expert for pretrained language models, 2023c.
- Wenhui Wang, Hangbo Bao, Li Dong, Johan Bjorck, Zhiliang Peng, Qiang Liu, Kriti Aggarwal, Owais Khan Mohammed, Saksham Singhal, Subhojit Som, et al. Image as a foreign language: Beit pretraining for all vision and vision-language tasks. *arXiv preprint arXiv:2208.10442*, 2022.
- Zhiyu Wu, Xiaokang Chen, Zizheng Pan, Xingchao Liu, Wen Liu, Damai Dai, Huazuo Gao, Yiyang Ma, Chengyue Wu, Bingxuan Wang, et al. Deepseek-vl2: Mixture-of-experts vision-language models for advanced multimodal understanding. *arXiv preprint arXiv:2412.10302*, 2024.
- An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, et al. Qwen2. 5 technical report. *arXiv preprint arXiv:2412.15115*, 2024.
- Qiyang Yu, Quan Sun, Xiaosong Zhang, Yufeng Cui, Fan Zhang, Yue Cao, Xinlong Wang, and Jingjing Liu. Capsfusion: Rethinking image-text data at scale. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14022–14032, 2024.

- Yan Zeng, Xinsong Zhang, and Hang Li. Multi-grained vision language pre-training: Aligning texts with visual concepts. *ArXiv preprint*, abs/2111.08276, 2021. URL <https://arxiv.org/abs/2111.08276>.
- Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *IEEE/CVF International Conference on Computer Vision, ICCV 2023, Paris, France, October 1-6, 2023*, pages 11941–11952. IEEE, 2023a. doi: 10.1109/ICCV51070.2023.01100. URL <https://doi.org/10.1109/ICCV51070.2023.01100>.
- Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 11975–11986, 2023b.
- Xinsong Zhang, Yan Zeng, Jipeng Zhang, and Hang Li. Toward building general foundation models for language, vision, and vision-language understanding tasks. *arXiv preprint arXiv:2301.05065*, 2023a.
- Yifan Zhang, Yifan Luo, Yang Yuan, and Andrew Chi-Chih Yao. Autonomous data selection with language models for mathematical texts. *arXiv preprint arXiv:2402.07625*, 2024.
- Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu, Tingchen Fu, Xinting Huang, Enbo Zhao, Yu Zhang, Yulong Chen, Longyue Wang, Anh Tuan Luu, Wei Bi, Freda Shi, and Shuming Shi. Siren’s song in the ai ocean: A survey on hallucination in large language models. *arXiv preprint arXiv:2309.01219*, 2023b.
- Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyang Luo, Zhangchi Feng, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations)*, Bangkok, Thailand, 2024. Association for Computational Linguistics. URL <http://arxiv.org/abs/2403.13372>.
- Qihao Zhu, Daya Guo, Zhihong Shao, Dejian Yang, Peiyi Wang, Runxin Xu, Y Wu, Yukun Li, Huazuo Gao, Shirong Ma, et al. Deepseek-coder-v2: Breaking the barrier of closed-source models in code intelligence. *arXiv preprint arXiv:2406.11931*, 2024.

A Loss of Vision-Language Model Training

To address the issue of incomparability of loss arising from diverse data distributions, we examine the convergence of pre-trained models that are trained on different datasets but are evaluated on the same supervised fine-tuning data, as illustrated in Figure 5. In particular, it can be observed that models trained with Hunyuan-Recap100M display a better convergence performance when dealing with the same data from downstream tasks. Specifically, these models exhibit lower loss values at both the starting point, with a loss value of 0.925, and the convergence point, where the loss value is 0.48.

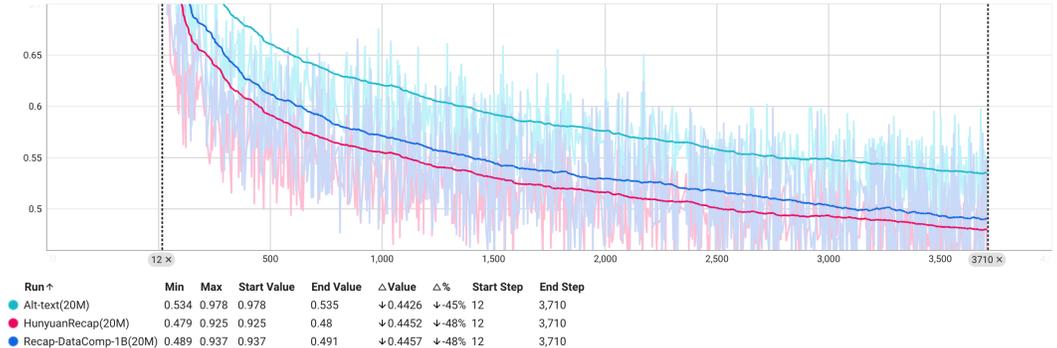


Figure 5: Loss curve of vision-language model pre-trained with alt-text, Recap-DataComp-1B or Hunyuan-Recap100M. Note that all pre-trained models use the same amount of data (20M), and at the same time, the three curves are evaluated on exactly the same supervised fine-tuning data.

B Examples of Text-to-Image Generations

In this section, we present a series of examples of text-to-image generation in Figure 6. The synthetic captions corresponding to the text concepts in Figure 6 can be found in Table 6. From these examples, we can see that the HunyuanDiT model does not respond to a few concepts, such as abacus and Yueqin, and its depictions of some other concepts are also inaccurate, like jellyfish and acerola. After tuning with Hunyuan-Recap100M, the model’s understanding of these concepts becomes more precise, and its generated image style is also more realistic. The situations demonstrated in these cases are consistent with the reduction in FID shown in Table 5, highlighting the wide coverage of concepts perceived by our data. This is corroborated by the significant improvement in the performance of the VLM trained with Hunyuan-Recap100M on numerous object perception tasks, as presented in Table 4.




Text	Image	HunyuanDiT	HunyuanDiT wRecap	HunyuanDiT wFT
Jellyfish				
Acerola				
Abacus				
Yueqin				
Alpaca				
The Grotto				
Shanghai Tower				

Figure 6: **Demonstration of text-to-image cases.** Here, the original instruction for image generation is denoted as "Text", the original picture as "Image", the generation effect of the original open-source model as "HunyuanDiT", the generation effect of the original open-source model with our Synthetic texts as "HunyuanDiT wRecap", and the effect of the model fine-tuned with our recaption data as "HunyuanDiT wFT".

Text	Our Recaption
Jellyfish	The picture shows two jellyfishes. Their bodies are orange or light red with distinct stripes or lines. Their tentacles are long, slender, transparent or semi-transparent. The background is black, highlighting the colors of the jellyfish and the details of their tentacles. The jellyfish are swimming or floating in the water, and their tentacles are spread out in the water, forming a distinct linear effect.
Brazilian Acerola	The image shows the branches of a tree laden with red and green fruits. The red fruits look ripe, while the green ones appear unripe. There are also green leaves on the branches. In the background, more green leaves and a few blurred flowers or small buds can be seen. The overall environment seems to be an outdoor natural setting.
Abacus	There is a group of people sitting in front of a wooden table in the picture, using abacuses for learning or operation. There are several abacuses on the table. Wooden doors and windows can be seen in the background, indicating that this is an indoor environment, perhaps a classroom or a study place. People are wearing casual or semi-formal clothes, looking relaxed.
Yueqin	This is a Yueqin, which has a circular resonator and four strings. There are multiple positions for pressing the strings on the body of the instrument, and there are four tuning pegs on the headstock. Overall, it exhibits the characteristics of a traditional musical instrument.
Alpaca	There are two alpacas standing on the grass in the image, with blue sky and white clouds in the background. The alpaca on the left has lighter fur, while the one on the right has darker fur. The grass is green, and the postures of the alpacas suggest that they are either walking or standing.
The Grotto	The Grotto is a church located in a natural environment. The facade of the church is a huge rock cave, covered with green vegetation above the cave, and surrounded by dense trees. Inside the church, there is an altar, above which a cross is hung, surrounded by lighting. In front of the church, there is a row of wooden benches for believers to sit and pray.
Shanghai Tower	Shanghai Tower is a skyscraper with a spiral glass curtain wall design on its exterior. At the top, there is a circular observation deck, surrounded by other high-rise buildings. The overall architectural style is modern and futuristic.

Table 6: The original text of the image in Figure 6 and the synthetic caption after being processed by our recaption model.