

ViMo: A Generative Visual GUI World Model for App Agent

Dezhao Luo^{*1} Bohan Tang^{*2} Kang Li² Georgios Papoudakis³ Jifei Song³ Shaogang Gong¹ Jianye Hao³
Jun Wang⁴ Kun Shao^{†3}

Abstract

App agents, which autonomously operate mobile Apps through Graphical User Interfaces (GUIs), have gained significant interest in real-world applications. Yet, they often struggle with long-horizon planning, failing to find the optimal actions for complex tasks with longer steps. To address this, world models are used to predict the next GUI observation based on user actions, enabling more effective agent planning. However, existing world models primarily focus on generating only textual descriptions, lacking essential visual details. To fill this gap, we propose **ViMo**, the first visual world model designed to generate future App observations as images. For the challenge of generating text in image patches, where even minor pixel errors can distort readability, we decompose GUI generation into graphic and text content generation. We propose a novel data representation, the Symbolic Text Representation (**STR**) to overlay text content with symbolic placeholders while preserving graphics. With this design, ViMo employs a **STR Predictor** to predict future GUIs’ graphics and a **GUI-text Predictor** for generating the corresponding text. Moreover, we deploy ViMo to enhance agent-focused tasks by predicting the outcome of different action options. Experiments show ViMo’s ability to generate visually plausible and functionally effective GUIs that enable App agents to make more informed decisions. Project link: <https://ai-agents-2030.github.io/ViMo/>.

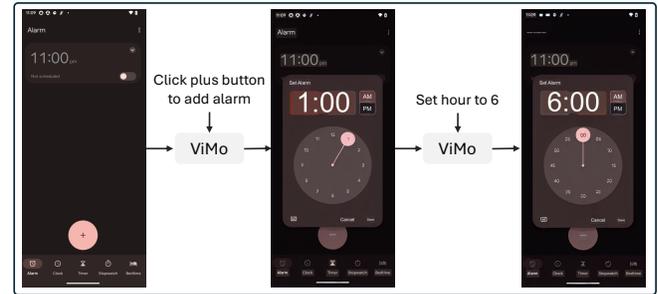


Figure 1. Visualisation of ViMo in generating next GUIs based on the current GUI observation and a user action.

1. Introduction

Recent advancements in Large Language Models (LLMs)² have unlocked new possibilities for deploying AI agents across diverse fields (Li et al., 2023; Gou et al., 2023; Rawles et al., 2024b;b; Wang et al., 2024a). A notable application is the smartphone application (App) agents (Rawles et al., 2024a; Wang et al., 2024a), designed to directly interact with Graphical User Interfaces (GUIs) to perform tasks autonomously and efficiently in a mobile operating system.

However, existing agents struggle with making decisions for tasks requiring longer steps (Chae et al., 2024). To address this “long-horizon” limitation, an increasing number of studies have introduced a world model, which predicts how GUIs evolve in response to user actions (Gu et al., 2024). Yet, these models typically rely on language to describe future observations. These language-based descriptions often fail to capture the intricate visual details, such as the location and colour of GUI elements, necessary for a precise representation (Chae et al., 2024). There is a need for a visual GUI world model capable of comprehensively representing observations in visual modality. Addressing this gap serves as the primary motivation for this work.

To build a visual GUI world model capable of generating plausible future GUI observations that are visually consistent with user actions, as shown in Fig. 1, a straightforward

^{*}Equal contribution ¹Queen Mary University of London ²University of Oxford ³Huawei Noah’s Ark Lab ⁴University College London. [†]Corresponding author: Kun Shao <shaokun2@huawei.com>.

²By LLMs, we refer to the concept of foundation models that accept various input modalities (e.g., visual language models (VLMs), multimodal LLMs (MLLMs)) while producing textual sequences (W. contributors, 2024).

approach involves generating each pixel of a GUI using image generations (Rombach et al., 2022). Although these methods demonstrate promising results, such as the GUI graphic generation on the location, style, and colour of GUI elements (Wei et al., 2024), or scene-text generation in a style that aligns the visual context (Chen et al., 2024b; Zhang et al., 2024c), they still display distortions in the text rendering, particularly for small-sized text where each pixel is critical for accurately identifying and representing the text (see Fig. 2 for an illustration).

To address the challenges of accurately generating high-fidelity text content within a GUI, we propose **ViMo**, the first visual GUI world model. **ViMo** decouples the generation of graphic and text content into distinct processes, using a novel data representation named Symbolic Text Representation (**STR**). In **STR**, each text content is replaced (overlaid) with a text symbol, a rectangle-shaped placeholder with a defined border and fill colours, functioning as a special GUI element. Thus, we simplify the task of text content generation to text symbol generation, which reframes the problem to the localisation of the text within a GUI. Based on **STR**, ViMo employs a **STR Predictor** and a **GUI-text Predictor** to generate the graphic and the text content respectively. Specifically, the **STR predictor** is implemented as a diffusion model, taking the current **STR**, extracted from the given GUI, and a user action as inputs to generate the **STR** of the next GUI. Meanwhile, the **GUI-text predictor**, implemented based on an LLM, leverages the **STR** generated by the **STR predictor** to produce the corresponding text for each text symbol. Finally, the predicted **STR** and the generated text are combined to produce the next GUI.

We evaluate ViMo in two distinct scenarios to comprehensively demonstrate its effectiveness. First, we conduct a world model ability evaluation, focusing on two critical aspects: (a) GUI quality evaluation, where we assess the generated GUIs using a visual similarity score, instructional accuracy score, and action readiness score to ensure a detailed and holistic evaluation of the generated GUI; (b) GUI-based trajectory synthesis evaluation, where the generated GUI is leveraged as the input to an App agent to generate subsequent actions, with higher-quality trajectories indicating a GUI more aligned with real-world environment. These experiments provide a robust assessment of the model’s ability to generate visually precise and contextually plausible GUIs. Second, we test ViMo in an agent-focused task to evaluate its utility in practical applications. Given a goal and the current observation of an App, an agent determines the optimal actions needed to achieve the goal (Wang et al., 2024a). By accurately predicting the next GUI given the current GUI and an action, ViMo enables the agent to better anticipate the action outcomes and make more informed decisions. This evaluation highlights the model’s applicability in real-world scenarios and its potential to enhance

decision-making for App agents.

Our main contributions are summarised as follows:

- We propose ViMo, the first generative visual GUI world model that predicts App observations in a visual modality, capable of more realistic and concrete visual GUI predictions compared to contemporary language-based methods.
- To address the challenge of strict pixel-level accuracy required to avoid distorted or blurred text generation in a GUI, we propose a Symbolic Text Representation (**STR**), overlaying text with uniform text symbols (placeholders) to simplify text content generation to text location generation. Then ViMo leverages an LLM to generate the corresponding text content for each text symbol.
- Extensive experiments show the effectiveness of ViMo in both the world model ability evaluation and agent-focused tasks. Specifically, ViMo achieves on average **29.14%** relative improvement in performance over existing world models and enhances the App agent’s step-wise action prediction accuracy with a relative performance gain of **14.07%**.

2. Related Works

2.1. App Agent

App agents, powered by LLMs, have made significant strides in automating tasks on mobile Apps (Wen et al., 2024b; Chen et al., 2024c; Zhang et al., 2024a;b; Lee et al., 2023; Nguyen et al., 2024). These agents interact with GUIs by emulating human actions such as tapping, typing, and swiping. This enables them to accomplish various user goals, such as searching for products or setting alarms. Approaches in this domain are broadly divided into *language-based* and *multi-modality-based* methods. Language-based methods rely on textual description of the App observation and the user goal to generate appropriate actions (Wen et al., 2024a; Rawles et al., 2024a; Li et al., 2024), while multi-modality-based methods enhance this capability by incorporating GUIs for a more comprehensive understanding of the interface (Rawles et al., 2024a; Wang et al., 2024a; Christianos et al., 2024; Wang et al., 2024b). Despite the promising results, these approaches struggle with long-horizon tasks that require multiple interdependent actions and a deep understanding of dynamic environments (Chae et al., 2024). For this challenge, recent works (Putta et al., 2024; Koh et al., 2024) introduce the use of real-world emulators to simulate GUI changes resulting from agent actions, enabling App agents to better navigate complex, multi-step scenarios and improve decision-making accuracy. However, the use of real-world emulators faces significant drawbacks, including the high computational costs of setting up emulators for specific mobile systems and the safety risks involved in executing real-world inter-

actions, such as repeatedly sending messages or making purchases. To overcome these, world models have attracted increasing attention as a more efficient alternative (Chae et al., 2024; Gu et al., 2024).

2.2. World Model

By observing the real world, world models can predict how the environment evolves in response to an action (LeCun, 2022; Ding et al., 2024). For instance, video generation models such as Sora (OpenAI, 2024) simulate future observations by predicting videos given a video observation and GameNGen (Valevski et al., 2024) predicts how a game system will respond to user actions. Notably, the ability to anticipate potential outcomes of actions has proven to be highly beneficial in informing decision-making processes (Pascanu et al., 2017; Yang et al., 2024; Schrittwieser et al., 2020; Hafner et al., 2019). Inspired by their success, world models have emerged to predict the next observation on websites (Chae et al., 2024; Gu et al., 2024). These models (Chae et al., 2024; Liu et al., 2023) typically take a website observation and an action as inputs to generate a textual description of the next observation. While websites provide multiple sources of information, including the actual site and their CSS or HTML source files, mobiles present a more limited context, as only the GUIs are typically accessible. Moreover, such text-only descriptions often lack the precise visual details required for accurately predicting future observations, highlighting the need for a visual world model capable of generating high-fidelity future GUI images.


2.3. GUI Generation

With the rapid advancements in image generation techniques, such as diffusion models (Rombach et al., 2022; Kumari et al., 2023; Cao & Gong, 2024), generating realistic images has become increasingly feasible. Building on these developments, previous methods have explored generating GUI directly in pixel space. For instance, layout generation methods generate the location of GUI elements (Lu et al., 2023; Zheng et al., 2023; Sobolevsky et al., 2023; Zhao et al., 2019), scene-text generation methods generate text that aligns with the visual context (Chen et al., 2024a;b; Zhang et al., 2024c; Zeng et al., 2024), UI-diffuser (Wei et al., 2024) fine-tune a stable diffusion model to generate mobile GUIs conditioned on text prompts. For the next GUI generation conditioned on current GUI observation and a user action, it seems straightforward to resort to an image-and-text-conditioned approach (Brooks et al., 2023). However, we find that pixel-based image generation struggles with rendering text accurately, as even minor pixel prediction errors can lead to distortions, particularly for small-sized text (see Fig. 2 for examples).

In this work, we advance beyond existing approaches that

User Action:

Enter the Email as dbwscratch.test.id5@gmail.com

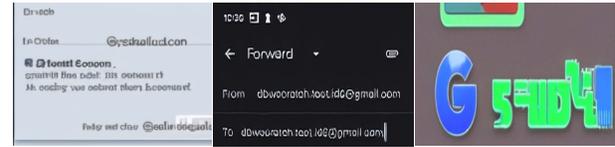

UI-Diffuser

InstructPix2Pix

Textdiffuser-2

Figure 2. GUIs generated by image generation methods (UI-diffuser (Wei et al., 2024), InstructPix2Pix (Brooks et al., 2023), Textdiffuser-2 (Chen et al., 2024b)). Cropped for space efficiency.

generate GUI entirely (graphic and text) at the pixel level. Instead, we render graphics as image pixels and generate text as language tokens, enabling a more accurate method for GUI generation.

3. Method

In this section, we first define our setup in Subsection 3.1. Then, we explain our motivation and introduce our ViMo in Subsection 3.2. Finally, we demonstrate how ViMo can be applied to enhance existing App agents in real-world scenarios (Subsection 3.3). All the prompts in this section are listed in the Appendix.

3.1. Problem Setup

In general, a GUI world model processes a given GUI Image x_k at step k , and user action a , to predict the effect of a on x_k and simulate the next GUI. Formally, this can be expressed as:

$$x_{k+1}^a = f(x_k, a), \quad (1)$$

where $f(\cdot)$ represents the world model, and x_{k+1}^a denotes the predicted next ($k+1$) GUI image after applying a to x_k . In the following, we explain in detail of our world model.

3.2. ViMo: Generative Visual GUI World Model

To tackle the limitation of existing methods (Chen et al., 2024b; Brooks et al., 2023; Wei et al., 2024) in generating visually plausible text for a GUI, as shown in Fig. 2, we propose ViMo, a novel generative visual GUI world model that decouples the graphic and text content generation. As shown in Fig. 3, we first detect and remove all the text in the GUI by overlaying it with a text symbol to create the Symbolic Text Representation (STR). Then a STR predictor is leveraged for determining the STR representation of the next GUI with a pixel-based diffusion process. Finally, a GUI-text predictor is proposed to generate the text content for each symbol using an LLM, followed by a handcrafted design to overlay the text into the STR image to create the next GUI. Their details are specified in the following.

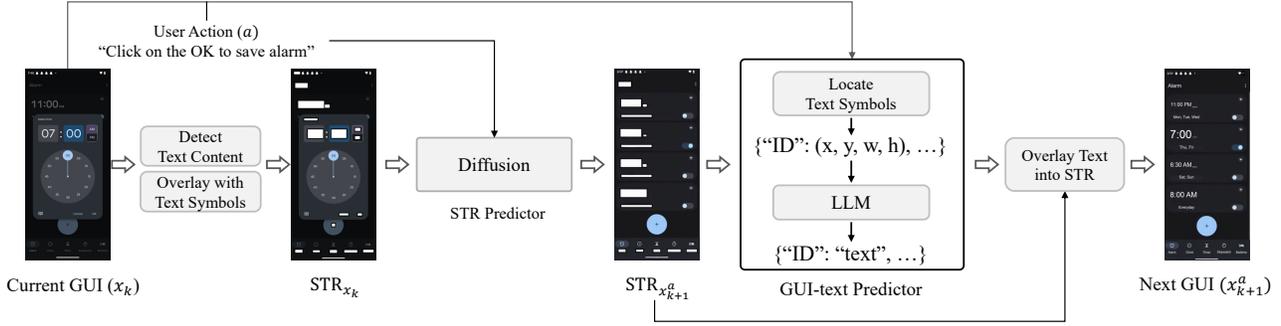


Figure 3. Framework of our ViMo. We first detect text content (actual words) in the current GUI (x_k) and overlay it with text symbols (rectangle-shaped placeholders with a black border and white fill), to create STR_{x_k} . Then STR_{x_k} and the user action (a) are input to the STR predictor to generate the STR of the next GUI ($STR_{x_{k+1}}^a$). Next, text symbols within $STR_{x_{k+1}}^a$ are located and assigned unique ID token. Then the LLM predicts the text content corresponding to each token. Finally, the next GUI image is constructed by overlaying the predicted text into the STR.

3.2.1. STR: SYMBOLIC TEXT REPRESENTATION

To develop a GUI prediction model that eliminates the need to generate specific text content, we propose the Symbolic Text Representation (STR), where all the text content (actual words) within the GUI image is symbolised (overlaid) with uniform text symbols (placeholders). To be specific, we create an STR representation from a given GUI image with three steps: 1) using an OCR model (Shi et al., 2016; Qiao et al., 2020) to detect text within the GUI; 2) masking the detected text by overlaying it with a box filled with white and bordered in black; 3) we leverage an LLM to filter out static text displayed on static GUI elements and preserve it in the image, as it does not involve any semantic evolution or dynamic changes and remains unchanged as part of specific elements such as a keyboard or a clock face. Additionally, we empirically find that predicting this static text with complex spatial patterns poses significant challenges for the LLM.

Through the above process, GUI images are transformed into the STR representation, where the text content is abstracted into a text symbol, relaxing the task of generating semantic text content into predicting text symbols that indicate the location and size.

3.2.2. STR PREDICTOR

Building on the powerful generative capability of diffusion-based models (Rombach et al., 2022), we introduce a STR predictor specifically trained to understand a given STR and a user action, enabling it to generate the corresponding next STR effectively. In particular, we fine-tune a pre-trained stable diffusion model (Rombach et al., 2022) to predict the next STR, conditioned on the STR of the current GUI and the user action. Given a STR representation (STR_{x_k}) extracted from GUI (x_k), the process starts with the encoding of STR_{x_k} into a latent representation (Kingma & Welling,

2013): $z = \mathcal{E}(STR_{x_k})$. Gaussian noise is then added to this representation to create z_t at timestep t . A denoising autoencoder is subsequently trained to predict the Gaussian noise in the latent representation, aiming to reverse the noise addition. The objective is defined as:

$$L = \mathbb{E}_{\mathcal{E}(STR_x), \epsilon \sim \mathcal{N}(0, I), t} \left[\|\epsilon - \epsilon_\theta(z_t, \mathcal{E}(STR_{x_k}), t, a)\|_2^2 \right], \quad (2)$$

where ϵ_θ is a U-Net (Ronneberger et al., 2015) architecture conditioned on a timestep t , a text prompt a (action), the visual input z_t and the image condition STR_{x_k} . To support the condition on images, we follow Brooks et al. (2023) to add additional input channels to the first convolutional layer, concatenating the image condition $\mathcal{E}(STR_{x_k})$ with the noised latent z_t . After training, our STR predictor is capable of synthesising the next STR ($STR_{x_{k+1}}^a$) for given STR_{x_k} with action instruction a .

3.2.3. GUI-TEXT PREDICTOR

Given a STR representation generated by our STR predictor, we design a GUI-text predictor to generate plausible text for the text symbols in the STR based on its graphics. Specifically, we first locate the text symbols in the STR by colour matching and boundary detection. This outputs the location of text symbols and their unique ID token, denoted as \mathcal{T} . Then we leverage the image processing and task understanding ability of LLM to predict the text content based on its context in STR. This process can be formulated as:

$$\text{text}_{x_{k+1}}^a = \text{LLM}(STR_{x_{k+1}}^a, x_k, a, \mathcal{T}), \quad (3)$$

where $STR_{x_{k+1}}^a$ denotes the STR representation of x_{k+1}^a . $\text{text}_{x_{k+1}}^a$ contains the predicted text content for each text symbol, associated with its ID token. This design ensures flexible and accurate text generation tailored to the predicted GUI STRs as the context. Finally, we overlay each text content ($\text{text}_{x_{k+1}}^a$) to $STR_{x_{k+1}}^a$ to reconstruct the predicted GUI image (x_{k+1}^a). To be specific, text symbols are replaced with

Algorithm 1 Enhancing App Agent with Generative Visual GUI World Model

Input: Current GUI Observation x_k , A goal g , A visual world model ViMo, A selection model $S(\cdot)$.
Output: Action to be applied on x_k to achieve g .
Generate action options \mathcal{A} with n actions $\{a^i\}$ (Eq. (4)).
for $i = 1$ **to** n **do**
 Leverage ViMo to synthesis the next GUI observation conditioned on a^i and x_k , denoted as $x_{k+1}^{a^i}$ (Eq. (5)).
end for
Use $S(\cdot)$ to identify the optimal action with predicted observation (Eq. (6)).

the corresponding text based on coordinates, with dynamic styling determined by the symbol’s size and surrounding colours. More details are in the Appendix.

3.3. ViMo Enhanced App Agent

Motivated by that App agents usually face limitations in long-horizon planning to make optimal decisions on action selection (Chae et al., 2024), we leverage the proposed ViMo to enhance the decision-making of App agents.

To be specific, we break down the process into three steps: action option generation, action outcome synthesis, and action selection. In the first step, the App agent generates n action options, as follows:

$$\mathcal{A} = \text{Agent}(x_k, g), \quad (4)$$

where $\mathcal{A} = \{a^1, a^2, \dots, a^n\}$ denotes the action option set, x_k is the current GUI image at step k , and g is the given user goal. With these action options, our world model ViMo is leveraged to synthesise the outcome (next GUI) of these actions as follows:

$$x_{k+1}^{a^i} = \text{ViMo}(x_k, a^i), \quad (5)$$

where $x_{k+1}^{a^i}$ denotes the synthesised next GUI of applying action a^i on x_k . Finally, each action a^i and its corresponding predicted outcome $x_{k+1}^{a^i}$ are fed into an LLM-based selection model, which identifies the optimal action based on the generated GUIs. This process can be formulated as:

$$a_{se} = S\left(\{(a^i, x_{k+1}^{a^i})\}_{i=1}^n\right), \quad (6)$$

where a_{se} denotes the selected action, and $S(\cdot)$ is the selection model. This procedure is outlined in Algorithm 1. By predicting the next GUI, ViMo provides the agent with the potential outcome of an action, enabling it to make more informed decisions.

4. Experiments

In this section, we begin by summarising our proposed STR dataset discussed in Subsection 3.2.1. Next, we test the

Table 1. Summarisation of our STR dataset.

App	Episode	Image	Action
19	3550	23620	18450

core capability of our ViMo, focusing on its GUI generation ability. Building on this, we demonstrate how the powerful GUI generation capability of ViMo can enhance the decision-making of App agents in real-world App operation tasks. Finally, we carry out the ablation study to validate the effectiveness of our model design. Specific setups and experiment details are elaborated in subsequent sections.

4.1. Dataset Summarisation

Our STR dataset was constructed using data from two widely recognised and large-scale sources: Android Control (Li et al., 2024) and Android in the Wild (AITW) (Rawles et al., 2024b). From these sources, we respectively sampled 12 and 7 Apps, selecting those with rich data samples while filtering out noise. Android Control provides two types of user actions: (1) *action commands*: predefined actions (e.g., click, scroll) accompanied by specific parameters such as coordinates (x, y); (2) *action instructions*: actions described in natural languages, such as “click the plus icon”. We used action instructions as conditions for our world model as this approach was more concrete and better utilised the pre-trained model in understanding natural language. For AITW, action commands were converted into action instructions using OpenAI’s ChatGPT-4o. Our data is summarised in Table 1. To ensure both time-efficient and cost-efficient experiments, we followed prior App agent (Rawles et al., 2024b) on partial split evaluation, instead of evaluating the model on the entire testing set. Specifically, we randomly sampled 57 episodes across 19 distinct Apps. More details about our dataset including collection details, split summarisation and full-split experiments are provided in the Appendix.

4.2. World Model Ability

We evaluated the GUI generation capability of ViMo, from two critical perspectives: GUI quality evaluation and GUI-based trajectory synthesis. We compared against two types of world models: language-based and vision-based models. For language-based models, we adapted website world models (Gu et al., 2024) to App setups, utilising Change-text to generate textual descriptions capturing differences between consecutive observations and HTML-text to predict App observations in an HTML format. For vision-based GUI world models, we included InstructPix2Pix (IP2P) (Brooks et al., 2023) and UI-diffuser (Wei et al., 2024), both originally designed for image editing and GUI generation. Further, we leveraged HTML-vision, where HTML-text were converted

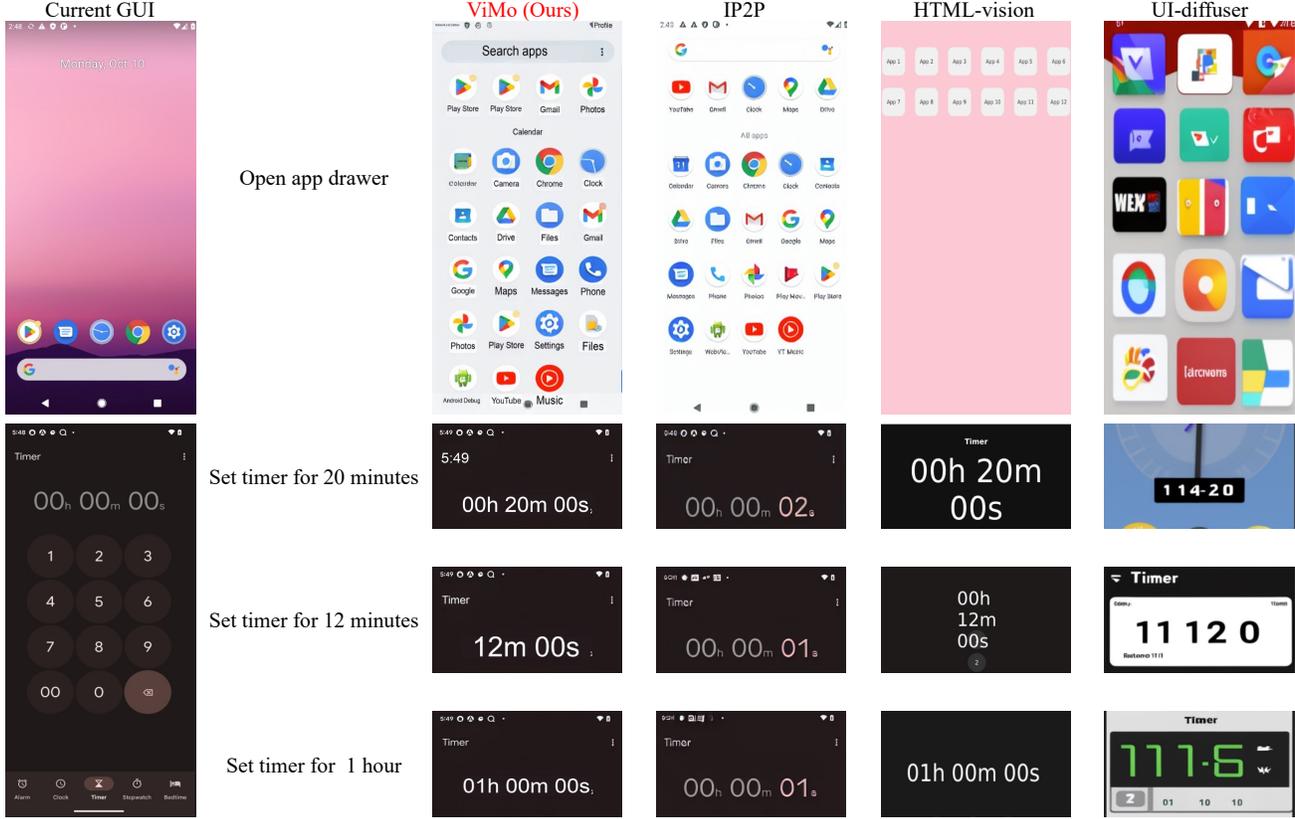


Figure 4. GUI generation comparison in graphic generation (Top) and text generation (Bottom, cropped for space efficiency).

Table 2. GUI quality evaluation. s_{gc} indicates the GUI consistency, s_{ia} instructional accuracy and s_{ar} action readiness score. s_h indicates the harmonic average between the 3 metrics. Δs_h is the relative performance gains of our ViMo over other methods.

Method	s_{gc}	s_{ia}	s_{ar}	s_h	Δs_h
HTML-vision	0.6969	85.77	62.79	0.7154	5.39%
IP2P	0.7414	63.57	70.15	0.6901	10.20%
UI-diffuser	0.5977	39.61	38.75	0.4426	71.82%
ViMo (Ours)	0.7423	75.39	78.68	0.7605	-

Table 3. Trajectory synthesis evaluation. “T+L” denotes the accuracy of the whole trajectory with length L.

World Model	T+1	T+2	T+3	T+4
w/o world model	22.81	14.04	7.02	0
Change-text	52.63	26.32	10.53	5.26
HTML-text	38.60	14.04	12.28	7.02
HTML-vision	43.86	19.30	10.53	10.53
UI-diffuser	52.63	29.82	12.28	5.26
IP2P	56.14	21.05	10.53	7.02
ViMo (Ours)	57.89	36.84	14.03	12.28

into images for visual representation.

GUI Quality Evaluation. In this setting, we compared our approach against the three visual world models: IP2P, UI-diffuser and HTML-vision. For the evaluation metrics: The *GUI consistency score* (s_{gc}) assessed the visual similarity between the ground truth and the generated next GUI using DINO (Caron et al., 2021) as the visual encoder; *Instructional accuracy score* (s_{ia}) used an LLM to determine whether the generated GUI adheres to the user action; *Action readiness score* (s_{ar}) evaluated whether the generated GUI retains valid elements essential for subsequent actions required to achieve the user goal. Prompts for s_{ia} and s_{ar} are given in the Appendix.

As shown in Table 2, ViMo achieved the highest score on the harmonic average of the three metrics, surpassing other methods with an average relative performance improvement of 29.14%. Qualitative comparisons are presented in Fig. 4, under two scenarios: GUI graphic changes (Top) and text generation (Bottom). Experiments revealed that while the HTML-vision method exhibited greater flexibility in responding to user actions (see the bottom of Fig. 4 and s_{ia} in Table 2), it failed to produce concrete details necessary for future actions, as indicated by lower s_{ar} . Conversely, IP2P generated plausible GUI graphics but lacked flexibility in text content generation, (as reflected by s_{ia} in Table 2).

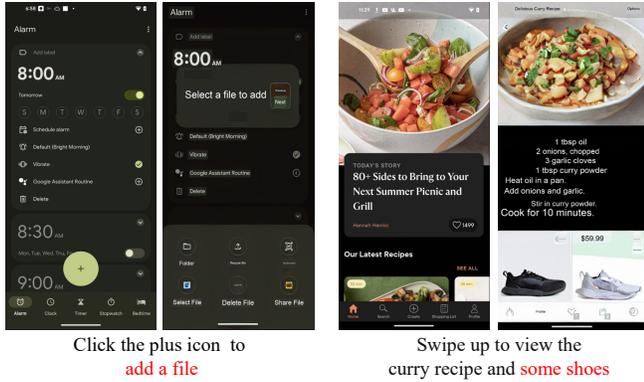


Figure 5. GUI generation conditioned on a novel combination of current GUI observation and user action.

This trade-off highlighted the superior balance of ViMo.

Additionally, we studied the generalisation of ViMo in Fig. 5 by providing user actions that were not typically encountered within the App’s standard context. For example, in the Clock App, a user action to “add a file” generated a Drive-style file selection window while retaining the Clock interface. Similarly, in the Kitchen Store App, ViMo can generate content corresponding to the action. These results emphasised ViMo’s generalisation ability facing novel combinations of App observations and user actions.

GUI-based Trajectory Synthesis. In this experiment, ViMo generated GUIs served as the observation for App agents to predict an action to achieve the user goal, and the agent’s output actions were evaluated. This setup assessed whether ViMo provided concrete and reliable details that aligned with real-world scenarios for action prediction. The process was iterated for L steps and the success accuracy of the entire L -step trajectory was calculated. More details about the agent setup and evaluation are in the Appendix.

As shown in Table 3, we compared ViMo against both visual- and language-based world models and demonstrated that our model significantly outperformed the other methods by providing more accurate and reliable information. This was reflected in higher trajectory prediction accuracy, underscoring the ability of our model to generate GUIs that aligned with the real-world environment.

4.3. World Model Enhanced App Agent

In this section, we demonstrate that: (1) ViMo enhanced the performance of App agents in decision-making; (2) ViMo outperformed other world models in enabling App agents to make more accurate decisions.

Comparison with App Agents. In this experiment, we collected 6 LLM-based App agents, which included three language-based methods: ER, AutoDroid, and T3A, as

Table 4. Decision optimisation comparison with App agents.

Agent Type	App Agent	Step Acc.
Language-Based	ER (Li et al., 2024)	34.50
	AutoDroid (Wen et al., 2024a)	35.46
	T3A (Rawles et al., 2024a)	43.13
	T3A + VisMo (Ours)	49.20
Multi-Modality-Based	APP-Agent (Zhang et al., 2023)	42.81
	Mobile-Agent-v2 (Wang et al., 2024a)	43.45
	M3A (Rawles et al., 2024a)	46.01
	M3A + VisMo (Ours)	50.16



Figure 6. Ablation study on static text generation: (a) Generating static text using an LLM; (b) Retaining the text in the image and rendering it as image pixels.

well as three multi-modality-based methods: APP-Agent, Mobile-Agent-v2, and M3A. We applied our ViMo into M3A and T3A following the process in Subsection 3.3. Moreover, we followed the previous works (Rawles et al., 2024b; Li et al., 2024) to use the step accuracy (the number of correct actions divided by the number of overall actions) to quantify the model performance. Table 4 demonstrates that the ViMo was beneficial to the App agent, achieving a relative performance gain of 9.01% for M3A and 14.07% for T3A. These findings highlighted the effectiveness of our proposed world model in providing App agents with enhanced decision-making capability.

Comparison with World Models. We further evaluated the ability of ViMo to enhance App agent decision-making by comparing it against other world models discussed in Subsection 4.2. For more comprehensive comparisons, we applied all the world models on two App agents: language-based T3A and multi-modality-based M3A. To provide more detailed results, we categorised the Apps into three groups: “Leisure”, “Work” and “System”. Table 5 illustrates that our proposed world model outperformed other world models, achieving overall scores of 49.03% and 50.16% respectively with the two agents. These findings underscored the effectiveness and practical value of our world model in real-world applications. Additional information about the categorisation and experiments with more App agents are provided in the Appendix.

Table 5. Decision optimisation comparisons on APP agent performance. Apps are categorised into “Leisure”, “Work”, and “System”.

App Agent	World Model Modality	World Model	Leisure	Work	System	Overall
T3A	w/o world model	w/o world model	41.22	51.28	42.86	43.13
	Langugae	Change-text	49.32	51.28	42.06	46.65
		HTML-text	47.30	48.72	43.65	46.01
	Vision	HTML-vision	50.68	53.85	43.65	48.24
		UI-diffuser	48.65	53.85	43.65	47.28
		IP2P	48.65	53.85	45.24	47.92
		ViMo (Ours)	50.00	58.97	45.24	49.20
M3A	w/o world model	w/o world model	46.62	51.28	43.65	46.01
	Langugae	Change-text	51.35	51.28	41.27	47.28
		HTML-text	50.68	51.28	40.48	46.65
	Vision	HTML-vision	52.03	48.72	45.24	48.89
		UI-diffuser	50.00	48.72	44.44	47.60
		IP2P	52.03	48.72	44.44	48.56
		ViMo (Ours)	53.38	53.85	45.24	50.16

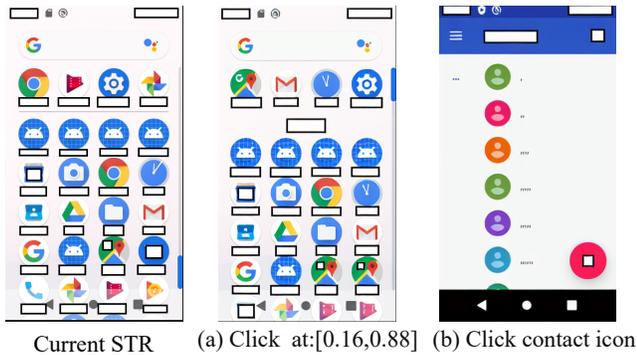


Figure 7. STR generation with action command (a) and action instruction (b).

4.4. Ablation Study

In this section, we ablated on two key components of ViMo: (1) preserving static text within the image to simplify the text generation task, and (2) using action instructions instead of action commands as the conditioning input for ViMo.

Firstly, for the challenge of predicting static text from specific GUI elements, such as keyboard, number pad or clock face, which typically do not involve text changes and exhibit complex spatial patterns, we retained static text within the image (Subsection 3.2.1). This approach eliminates the need for the LLM to generate such static text while generating in pixels instead. Fig. 6 illustrates the difficulties faced by the LLM when attempting to predict the static text associated with complex spatial patterns.

Secondly, we proposed conditioning STR prediction on action instruction rather than action commands (Subsection 4.1). Fig. 7 displays the STR generation of the same user intent but with different action types. It demonstrated that models learned with action commands failed to predict STR

Table 6. Ablation study for the effects of preserving static text and using action instructions on the performance of App agents. “Static Text” indicates whether the static text was preserved in images. “Action Instructions” denotes whether action instructions (“√”) or action commands (“-”) were used as the conditioning to ViMo.

Static Text	Action Instruction	App Agent	
		T3A	M3A
-	-	43.13	46.01
√	-	42.81	45.05
-	√	47.28	48.88
√	√	49.20	50.16

that aligns with the user’s intent, whereas action instructions offered a more concrete description, enabling the model to better capture the intent. Table 6 quantitatively confirms that both components significantly enhanced the performance of our ViMo on two App agents (T3A and M3A), underscoring their critical role in generating high-quality GUIs.

5. Conclusion

In this work, we introduced ViMo, a novel generative visual GUI world model designed to predict App observations in a visual modality, providing a more realistic and concrete approach compared to contemporary language-based models. To address the unique challenges of GUI generation, ViMo is equipped with the Symbolic Text Representation (STR) to simplify text content generation to text location prediction by overlaying text content with placeholders and delegating content generation to LLM. This innovation ensured high visual fidelity and avoided artefacts like distorted or blurred text. Through extensive experiments, we demonstrated that ViMo generated both visually plausible and functionally effective GUIs. Notably, ViMo boosted step-

wise action prediction accuracy by a relative performance gain of 14.07%, underscoring its potential to enhance App agents’ decision-making capabilities. While we required data collection for STR predictor training, we displayed a generalisation ability in generating GUIs conditioned on a novel combination of the current GUI and an action. These results highlighted the value of ViMo for advancing GUI world models and set a new benchmark for future research.

References

- Brooks, T., Holynski, A., and Efros, A. A. Instructpix2pix: Learning to follow image editing instructions. In *CVPR*, pp. 18392–18402, 2023.
- Cao, Y. and Gong, S. Few-shot image generation by conditional relaxing diffusion inversion. In *ECCV*, pp. 20–37. Springer, 2024.
- Caron, M., Touvron, H., Misra, I., Jégou, H., Mairal, J., Bojanowski, P., and Joulin, A. Emerging properties in self-supervised vision transformers. In *CVPR*, pp. 9650–9660, 2021.
- Chae, H., Kim, N., Ong, K. T.-i., Gwak, M., Song, G., Kim, J., Kim, S., Lee, D., and Yeo, J. Web agents with world models: Learning and leveraging environment dynamics in web navigation. *arXiv preprint arXiv:2410.13232*, 2024.
- Chen, J., Huang, Y., Lv, T., Cui, L., Chen, Q., and Wei, F. Textdiffuser: Diffusion models as text painters. *NeurIPS*, 36, 2024a.
- Chen, J., Huang, Y., Lv, T., Cui, L., Chen, Q., and Wei, F. Textdiffuser-2: Unleashing the power of language models for text rendering. In *ECCV*, pp. 386–402. Springer, 2024b.
- Chen, J., Yuen, D., Xie, B., Yang, Y., Chen, G., Wu, Z., Yixing, L., Zhou, X., Liu, W., Wang, S., et al. Spa-bench: A comprehensive benchmark for smartphone agent evaluation. In *NeurIPS 2024 Workshop on Open-World Agents*, 2024c.
- Christianos, F., Papoudakis, G., Coste, T., Hao, J., Wang, J., and Shao, K. Lightweight neural app control. *arXiv preprint arXiv:2410.17883*, 2024.
- Ding, J., Zhang, Y., Shang, Y., Zhang, Y., Zong, Z., Feng, J., Yuan, Y., Su, H., Li, N., Sukiennik, N., et al. Understanding world or predicting future? a comprehensive survey of world models. *arXiv preprint arXiv:2411.14499*, 2024.
- Gou, Z., Shao, Z., Gong, Y., Yang, Y., Huang, M., Duan, N., Chen, W., et al. Tora: A tool-integrated reasoning agent for mathematical problem solving. In *ICLR*, 2023.
- Gu, Y., Zheng, B., Gou, B., Zhang, K., Chang, C., Srivastava, S., Xie, Y., Qi, P., Sun, H., and Su, Y. Is your llm secretly a world model of the internet? model-based planning for web agents. *arXiv preprint arXiv:2411.06559*, 2024.
- Hafner, D., Lillicrap, T., Ba, J., and Norouzi, M. Dream to control: Learning behaviors by latent imagination. *arXiv preprint arXiv:1912.01603*, 2019.
- Kingma, D. P. and Welling, M. Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114*, 2013.
- Koh, J. Y., McAleer, S., Fried, D., and Salakhutdinov, R. Tree search for language model agents. *arXiv preprint arXiv:2407.01476*, 2024.
- Kumari, N., Zhang, B., Zhang, R., Shechtman, E., and Zhu, J.-Y. Multi-concept customization of text-to-image diffusion. In *CVPR*, pp. 1931–1941, 2023.
- LeCun, Y. A path towards autonomous machine intelligence version 0.9. 2, 2022-06-27. *Open Review*, 62(1):1–62, 2022.
- Lee, S., Choi, J., Lee, J., Wasi, M. H., Choi, H., Ko, S. Y., Oh, S., and Shin, I. Explore, select, derive, and recall: Augmenting llm with human-like memory for mobile task automation. *arXiv preprint arXiv:2312.03003*, 2023.
- Li, G., Hammoud, H., Itani, H., Khizbullin, D., and Ghanem, B. Camel: Communicative agents for” mind” exploration of large language model society. *NeurIPS*, 36:51991–52008, 2023.
- Li, W., Bishop, W., Li, A., Rawles, C., Campbell-Ajala, F., Tyamagundlu, D., and Riva, O. On the effects of data scale on computer control agents. *arXiv preprint arXiv:2406.03679*, 2024.
- Liu, A., Logeswaran, L., Sohn, S., and Lee, H. A picture is worth a thousand words: Language models plan from pixels. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 16450–16459, 2023.
- Lu, Y., Tong, Z., Zhao, Q., Zhang, C., and Li, T. J.-J. Ui layout generation with llms guided by ui grammar. *arXiv preprint arXiv:2310.15455*, 2023.
- Nguyen, D., Chen, J., Wang, Y., Wu, G., Park, N., Hu, Z., Lyu, H., Wu, J., Aponte, R., Xia, Y., et al. Gui agents: A survey. *arXiv preprint arXiv:2412.13501*, 2024.
- OpenAI. Sora: Creating video from text., 2024. URL <https://openai.com/sora/>.

- Pascanu, R., Li, Y., Vinyals, O., Heess, N., Buesing, L., Racanière, S., Reichert, D., Weber, T., Wierstra, D., and Battaglia, P. Learning model-based planning from scratch. *arXiv preprint arXiv:1707.06170*, 2017.
- Putta, P., Mills, E., Garg, N., Motwani, S., Finn, C., Garg, D., and Rafailov, R. Agent q: Advanced reasoning and learning for autonomous ai agents. *arXiv preprint arXiv:2408.07199*, 2024.
- Qiao, Z., Zhou, Y., Yang, D., Zhou, Y., and Wang, W. Seed: Semantics enhanced encoder-decoder framework for scene text recognition. In *CVPR*, pp. 13528–13537, 2020.
- Rawles, C., Clinckemahillie, S., Chang, Y., Waltz, J., Lau, G., Fair, M., Li, A., Bishop, W., Li, W., Campbell-Ajala, F., et al. Androidworld: A dynamic benchmarking environment for autonomous agents. *arXiv preprint arXiv:2405.14573*, 2024a.
- Rawles, C., Li, A., Rodriguez, D., Riva, O., and Lillicrap, T. Androidinthewild: A large-scale dataset for android device control. *NeurIPS*, 36, 2024b.
- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., and Ommer, B. High-resolution image synthesis with latent diffusion models. In *CVPR*, pp. 10684–10695, 2022.
- Ronneberger, O., Fischer, P., and Brox, T. U-net: Convolutional networks for biomedical image segmentation. In *Medical image computing and computer-assisted intervention—MICCAI 2015: 18th international conference, Munich, Germany, October 5-9, 2015, proceedings, part III 18*, pp. 234–241. Springer, 2015.
- Schrittwieser, J., Antonoglou, I., Hubert, T., Simonyan, K., Sifre, L., Schmitt, S., Guez, A., Lockhart, E., Hassabis, D., Graepel, T., et al. Mastering atari, go, chess and shogi by planning with a learned model. *Nature*, 588(7839): 604–609, 2020.
- Shi, B., Bai, X., and Yao, C. An end-to-end trainable neural network for image-based sequence recognition and its application to scene text recognition. *IEEE transactions on pattern analysis and machine intelligence*, 39(11): 2298–2304, 2016.
- Sobolevsky, A., Bilodeau, G.-A., Cheng, J., and Guo, J. L. Guilget: Gui layout generation with transformer. *arXiv preprint arXiv:2304.09012*, 2023.
- Valevski, D., Leviathan, Y., Arar, M., and Fruchter, S. Diffusion models are real-time game engines. *arXiv preprint arXiv:2408.14837*, 2024.
- W. contributors. Large language model — Wikipedia, the free encyclopedia. [Online]. Available: [urlhttps://en.wikipedia.org/wiki/Large_language_model](https://en.wikipedia.org/wiki/Large_language_model), 2024. Accessed: 2024-11-25.
- Wang, J., Xu, H., Jia, H., Zhang, X., Yan, M., Shen, W., Zhang, J., Huang, F., and Sang, J. Mobile-agent-v2: Mobile device operation assistant with effective navigation via multi-agent collaboration. *arXiv preprint arXiv:2406.01014*, 2024a.
- Wang, T., Wu, Z., Liu, J., Hao, J., Wang, J., and Shao, K. Distrl: An asynchronous distributed reinforcement learning framework for on-device control agents. *arXiv preprint arXiv:2410.14803*, 2024b.
- Wei, J., Courbis, A.-L., Lambolais, T., Dray, G., and Maalej, W. On ai-inspired ui-design. *arXiv preprint arXiv:2406.13631*, 2024.
- Wen, H., Li, Y., Liu, G., Zhao, S., Yu, T., Li, T. J.-J., Jiang, S., Liu, Y., Zhang, Y., and Liu, Y. Autodroid: Llm-powered task automation in android. In *MobiCom*, pp. 543–557, 2024a.
- Wen, H., Tian, S., Pavlov, B., Du, W., Li, Y., Chang, G., Zhao, S., Liu, J., Liu, Y., Zhang, Y.-Q., et al. Autodroid-v2: Boosting slm-based gui agents via code generation. *arXiv preprint arXiv:2412.18116*, 2024b.
- Yang, C., Wang, X., Jiang, J., Zhang, Q., and Huang, X. Evaluating world models with llm for decision making. *arXiv preprint arXiv:2411.08794*, 2024.
- Zeng, W., Shu, Y., Li, Z., Yang, D., and Zhou, Y. Textctrl: Diffusion-based scene text editing with prior guidance control. *arXiv preprint arXiv:2410.10133*, 2024.
- Zhang, C., Yang, Z., Liu, J., Han, Y., Chen, X., Huang, Z., Fu, B., and Yu, G. Appagent: Multimodal agents as smartphone users. *arXiv preprint arXiv:2312.13771*, 2023.
- Zhang, C., He, S., Qian, J., Li, B., Li, L., Qin, S., Kang, Y., Ma, M., Lin, Q., Rajmohan, S., et al. Large language model-brained gui agents: A survey. *arXiv preprint arXiv:2411.18279*, 2024a.
- Zhang, J., Wu, J., Teng, Y., Liao, M., Xu, N., Xiao, X., Wei, Z., and Tang, D. Android in the zoo: Chain-of-action-thought for gui agents. *arXiv preprint arXiv:2403.02713*, 2024b.
- Zhang, L., Chen, X., Wang, Y., Lu, Y., and Qiao, Y. Brush your text: Synthesize any scene text on images via diffusion model. In *AAAI*, volume 38, pp. 7215–7223, 2024c.
- Zhao, B., Meng, L., Yin, W., and Sigal, L. Image generation from layout. In *CVPR*, pp. 8584–8593, 2019.

Zheng, G., Zhou, X., Li, X., Qi, Z., Shan, Y., and Li, X. Layoutdiffusion: Controllable diffusion model for layout-to-image generation. In *CVPR*, pp. 22490–22499, 2023.

In this Appendix, we first provide detailed explanations, including prompts related to our methods, descriptions of our STR dataset, and evaluation details. Then, we present additional experimental results. Finally, we present additional visualisations of our proposed ViMo for GUI generation.

A. GUI-text Predictor Details

This section elaborates on the design and functionality of the GUI-text predictor, summarising its key components and providing a detailed explanation of its underlying processes.

The GUI-text predictor operates by locating the text symbols. To be specific, we first detect black borders by identifying black pixels in the BGR colour space, generating a binary mask that indicates whether a pixel is black or not. A pixel is classified as black if its BGR values fall within the range $[0,0,0]$ to $[50,50,50]$. Next, we identify rectangular regions within this mask by computing the ratio of the actual contour area to its corresponding bounding rectangle area. If this ratio exceeds 0.8, the region is considered a valid rectangle, allowing us to extract rectangles with black borders. For these detected regions, we further analyse their internal colour distribution to determine whether they contain the desired white colour. Specifically, we define white pixels as those with BGR values within the range $[200,200,200]$ to $[255,255,255]$. If more than 50% of the pixels within a region fall within this range, the region is classified as a text symbol. Thus, the locations of text symbols are extracted, and we assign a unique identifier (ID) to each symbol through enumeration.

Building on this, we take as inputs the current GUI image x_k , an action a to be applied to this image, the predicted STR (STR_{k+1}^a), the location and unique ID token of the text symbols in the STR \mathcal{T} . Then we leverage an LLM to predict the text content for each text symbol.

The process begins with preprocessing the STR by overlaying the ID token for each text symbol to the corresponding position in the STR image, resulting in a modified representation denoted as STR_{k+1}^{ID} . Next, we prompt an LLM to identify which text symbols will remain unchanged after the action a (see the prompt in Subsection G.1). These symbols are determined to not be affected by the action and have content identical to the previous GUI x_k . Based on the resulting ID list, we retrieve the corresponding pixels from the previous GUI x_k based on their location and update the STR representation. The updated image is still referred to as STR_{k+1}^{ID} for simplicity.

Subsequently, the LLM is prompted to determine the semantic role of each text symbol by analysing its context (see the prompt in Subsection G.2). This semantic information, combined with STR_{k+1}^{ID} , is then used to predict the exact text content of each symbol (see the prompt in Subsection

Table 7. Summarisation of our STR dataset.

Split	App	Episode	Image	Instrucion
Train	19	2853	19010	14852
Val	19	349	2290	1774
Test	19	348	2320	1824
All	19	3550	23620	18450

G.3).

Finally, to overlay a symbol with its actual text content, we perform the following steps: (1) For a given text symbol’s location and corresponding text, the average background colour is computed by the average colour of the area on the edge of text symbol’s coordinates; (2) The text colour is set to either white or black to ensure optimal contrast with the background colour, for better visibility; (3) The font size is calculated as the maximum size that allows the text to fit entirely within the boundaries of the text symbol, ensuring optimal use of space and readability.

B. Action Selection Details

In practice, our selection model, described in Section 3.3, identifies the best action in two steps. First, we query an LLM to evaluate all the action options, providing a judgment—either *valid* or *invalid*—and a confidence score for each action (see the prompt in Subsection G.4). These judgments are transformed into scores: if an action is judged *valid*, its score equals the confidence; if judged *invalid*, its score is the confidence multiplied by -1 . This scoring reflects that higher confidence in a *valid* action yields a higher score, while higher confidence in an *invalid* action results in a lower (negative) score. Second, we query the LLM again to select the best action from the two highest-scoring actions (see the prompt in Subsection G.5). This step is motivated by our observation that, in over 70% of tasks, the difference between the top two scores is equal to or less than 0.1, indicating that both are likely optimal. By allowing the LLM to choose between them, we refine the selection beyond simply picking the action with the highest score.

C. Data Collection

To ensure the quality and diversity of data samples for each App, while minimising noise, we collected App information from both Android Control (Li et al., 2024) and Android in the Wild dataset (AITW) (Rawles et al., 2024b) datasets. To be specific, out of 15,274 episodes in the Android Control, only 5,697 episodes include the “open_app” action. From these episodes, we extracted their “app_name”, identifying 758 unique applications. However, only 13 of these Apps had more than 50 samples. To enrich the dataset, we manually collected additional samples for these 13 Apps from the

rest of the dataset. For AITW, we extracted App names by using the package name listed under the “current activity” field. After filtering out noisy, 11 valid Apps remained. By combining the overlapping applications from both datasets, we obtained a total of 19 unique Apps. We split our dataset into “Train”, “Validation” and “Test” splits, and we summarise our dataset under each split in Table 7.

Furthermore, we converted action commands into action instructions for AITW with specific prompts in Subsection G.6. We use Paddleocr (Shi et al., 2016) for STR generation.

D. Evaluation Details

For the results presented in Table 2, we prompt LLM for the instructional accuracy score s_{ia} and action readiness score s_{ar} , as shown in Subsection G.7 and Subsection G.8 respectively. A generation is considered successful if “success” appears under “Status” for s_{ia} and “yes” under “ready for action” for s_{ar} .

For the results presented in Table 3, we employ an LLM as a judge to assess the alignment between the agent’s simulated actions and the ground truth actions within a given trajectory. Specifically, an agent is prompted to generate the action instructions based on the given GUI and the user goal (see the prompt in Subsection G.9) and the LLM evaluates whether the simulated action leads to the same outcome as the ground truth action (see the prompt in Subsection G.10), a “yes” of the “Status” is calculated as a match.

In Table 4, we categorise apps based on their primary functions into three groups: **Leisure**, **Work**, and **System**. The **Leisure** category includes apps commonly used for relaxation and entertainment, such as *Decathlon*, *eBay*, *Flipkart*, *Amazon*, *Adidas*, *Kitchen Stories*, *Booking.com*, *YouTube*, and *Vimeo*. The **Work** category comprises apps typically associated with professional or productivity-related activities, including *Gmail*, *Drive*, and *Chrome*. Lastly, the **System** category encompasses apps pre-installed in the Android operating system, such as *com.android.contacts*, *com.google.android.dialer*, *com.google.android.googlequicksearchbox*, *com.android.settings*, *com.google.android.apps.maps*, and *com.android.vending*.

E. Additional Experimental Results

Table 8 presents additional results of our ViMo applied to APP-Agent and Mobile-Agent-V2. These results further confirm the effectiveness of our ViMo compared to other world models.

Moreover, our method involves random factors, particularly from the use of LLMs. To evaluate their influence, we conducted the experiment three times, as summarised in

Table 8. Decision optimisation comparisons on APP agent performance. Apps are categorised into “Leisure”, “Work”, and “System”.

App Agent	World Model Modality	World Model	Leisure	Work	System	Overall
APP-Agnet	w/o world model	w/o world model	43.24	51.28	39.68	42.81
	Langugae	Change-text	45.96	56.41	45.24	46.96
		HTML-text	44.59	56.41	45.24	46.33
	Vision	HTML-vision	47.97	56.41	46.03	48.24
		UI-diffuser	47.30	56.41	44.44	47.28
		IP2P	47.30	58.97	45.24	47.92
ViMo (Ours)		50.68	58.97	43.65	48.89	
Mobile-Agent-v2	w/o world model	w/o world model	43.92	53.85	39.68	43.45
	Langugae	Change-text	47.30	66.67	41.27	47.28
		HTML-text	47.30	66.67	38.89	46.33
	Vision	HTML-vision	50.00	66.67	41.27	48.56
		UI-diffuser	49.32	61.54	41.27	47.60
		IP2P	46.62	66.67	45.24	48.56
		ViMo (Ours)	50.00	66.67	44.44	49.84

Table 9. Evaluation on randomness by running the experiment 3 times (r1-r3) on our sampled test split. “All” denotes the evaluation of the full test split. s_{gc} , s_{ia} and s_{ar} are the metrics same with Table 2. s_h denotes their harmonic score.

World Model	s_{gc}	s_{ia}	s_{ar}	s_h
r1	0.7421	75.08	78.29	0.7582
r2	0.7323	75.63	77.64	0.7546
r3	0.7423	75.39	78.68	0.7605
ALL	0.7308	76.07	78.54	0.7583

Table 9 (r1-r3). The results demonstrate that the randomness does not significantly impact the performance or consistency of our method. Additionally, we focused on a randomly selected subset of examples for evaluation, with results from the full test set also included to illustrate that the observed differences are minor, as shown in Table 9 (compare ALL to r1-r3). We consider the subset results to provide an accurate and reliable approximation for our analysis.

F. Additioanl Visualisation

Diverse visualisations are presented in Fig. 8 and Fig. 9. These examples illustrate how our method effectively generates the next GUI based on the given action and current GUI observation, showcasing its ability to produce visually coherent and contextually accurate GUI simulation.

Moreover, Fig. 10 showcases results generated from a single current GUI paired with different actions, further highlighting the versatility of our approach. Fig. 11 illustrates failure cases where text symbols are not represented as our rectangle-shaped placeholders with a black border and white fill, making them unrecognizable as text symbols. Improving the representation of text symbols remains a potential direction for future work.

G. Prompts

G.1. Prompt to decide the text symbols to remain unchanged after the action

```

You are a professional UI/UX analyst and your goal is to compare the two UI screenshots and return their overlapping layout.
### Inputs:
1. **Current Screenshot**: The current mobile UI as an image.
2. **Next UI Layout Screenshot**:
- An image of the next mobile UI layout with all text replaced by white boxes.
- Each box has a unique red ID label.
3. Use action: a user action described by language
Next UI Layout Screenshot is a result of a user action on the current screenshot, but the text elements are masked.
Please help me identify those layouts that are located in the same position, so I can predict their text directly from the current screenshot. Usually, the system bar information should be included. Exclude elements from the result if: The content (text) changes as a result of the user action, even if the element exists in both screenshots.
Please be very very cautious about putting an ID on the list, which means you are very very confident with this task. if you are unsure about some elements, please ignore them and do not put them on the list.
### Output the list of existing elements :
Return the results in the following JSON format:
['id1', 'id2', ...]
### Notes:
- Ensure the detected elements appear in both UI screenshots, which means their surrounding context is the same.
- Ensure identify those elements that their text will change by the user action and exclude them from your response.
- Ensure identify those elements that share a similar context layout, but their absolute are not the same, and them from your response.
- Ensure only reply in pure JSON format, with no placeholders or comments.

```

G.2. Prompt to determine the semantic role of each text symbol

You are a professional UI/UX analyst assigned to structure and analyse the semantics of mobile UI screenshots.

Your goal is to segment the UI and annotate box elements in a way that enhances understanding of their roles and relationships within the interface. Inputs:

- Current Screenshot: A visual representation of the mobile UI.
- Next UI layout screenshot: A visual representation of the next UI layout with all the text masked with a white box. Each box has an ID number on it in red colour. - User Action: An action put on the current UI will result in the next UI.
- Box locations: a list of box locations to better help you to locate the boxes in the format of 'id': id, 'Location':[x1,y1, width, height]. ID indicates their ID number in the UI screenshot.
- UI.size: the width/height of the input images. They are the same size. The image you received might be resized. Please scale it back for the locations.

Task:

Structure the boxes in the Next UI layout screenshot with semantics based on the visual input by following these steps:

- 1, Divide the UI into Semantic Windows Group the UI into functional sections with a specific name (e.g., "Header Windows," "Time Selector Panel").
2. Structure Text Elements in Each Semantic Window.

- Assign box elements to windows based on logical, visual relationships or semantic roles.
- For every element, structure output as :
 - **id: corresponding box retrieved from the box list and the Next UI layout screenshot.
 - **Role: A brief explanation of the role of this box. You should consider their [x1,y1] to indicate their location, [w,h] to indicate their size to decide the role. It is important to consider the context for the role prediction. The role should be in detail to distinguish it from other items in the same category.

Output Format: { "Window Name": "Category Name": ["id":id, "Role": "Role" , "id":id, "Role": "Role" , ...], "Category Name": ["id":id, "Role": "Role" , ...] , ... }

Key Guidelines:

- Ensure to retrieve id from the given screenshot and box list.
- Avoid duplicating or omitting IDs.
- Every box element in the box location list must be included in the structured output.
- Ensure there is no additional formatting, code blocks or placeholders in your response; return only a clean JSON without any comments.

G.3. Prompt to predict the exact text content for each symbol

Task: Plan the content for the next UI screen based on the provided inputs and instructions.

Inputs:

- Current Screenshot: A visual representation of the mobile UI.
- Next UI layout screenshot: A visual representation of the next UI layout with all light yellow boxes indicating a text place. Each box has an ID number on it.
- User Instruction: A specific action or command that transitions the current UI to the next UI state.
- Semantics for the masks in Next UI screenshot: A structured map.

Goal:

Predict the content (text) for each masked area in the next UI layout screenshot based on the following steps:

- Map Affected Elements to the Next UI.
- Align the affected elements with the yellow box coordinates on the next UI.
- Predict the text for each yellow box based on the user instruction and the context of the current UI.

If you can not find any information about the text, predict a plausible text based on its context.

Ensure to use the semantics to help you understand the layout and predict the text. If you think the semantics is wrong, please modify it in your

Output:

Return the predictions in JSON format with the structure: {"Window Name ": "Category Name ": ["id ": id, "text ": \text", "role ": "role" , "id ": "id", "text": "text", "role": "role"], , ... }

Ensure to predict text based on the context. Do not include any special characters. Ensure there is no additional formatting, code blocks or placeholders in your response; return only a clean JSON without any comments.

G.4. Prompt to evaluate actions with a confidence score

You are an agent who can operate an Android phone on behalf of a user. When given a user request, you will try to complete it step by step. At each step, a list of descriptions for most UI elements on the current screen will be given to you (each element can be specified by an index), together with a history of what you have done in previous steps. Based on these pieces of information and the goal, you must choose to perform one of the actions in the following list (action description followed by the JSON format) by outputting the action in the correct JSON format: action options from the dataset

The overall user goal/request is: {goal}

Here is a history of what you have done so far: {history} This is the action you picked in the latest step: {action}, whose semantic description is: {sum}

Your goal is to judge **whether the action you picked in the latest step is on the right track to the successful execution of the overall user goal/request**.

You will be given the screenshots before and after you perform the action

- The first screenshot corresponds to the UI state before you performed the action.
- The second screenshot corresponds to the UI state after you performed the action.

Also here is the list of detailed information for some UI elements in the before screenshot: {before.elements}

Note that, the "after" screenshot is generated by the agent's world model. As such, it may not faithfully represent the real UI. For instance: Some UI elements in the simulated "after" screenshot may not exist in a real UI. Your evaluation should consider the reliability of the UI predictions. If the "after" screenshot contains unreasonable elements, this likely indicates a failure.

Now provide your judgment on the selected action in JSON format. Your response must include:

Reason: A detailed explanation of why the action is valid or invalid.

Judgment: Your judgment must be either "valid" or "invalid".

Confidence: A confidence score between 0.0 and 1.0, reflects how likely your judgment is correct.

You must follow this structure exactly:

```
{Reason: ..., Judgement: "valid" or "invalid",
Confidence: ...}
```

Your Answer:

G.5. Prompt to select the optimal actions among two highest-scoring actions

You are an agent who can operate an Android phone on behalf of a user. When given a user request, you will try to complete it step by step. At each step, a list of descriptions for most UI elements on the current screen will be given to you (each element can be specified by an index), together with a history of what you have done in previous steps. Based on these pieces of information and the goal, you must choose to perform one of the actions in the following list (action description followed by the JSON format) by outputting the action in the correct JSON format action options from the dataset

The overall user goal/request is: {goal}

Here is a history of what you have done so far: {history}

Here is a list of descriptions for some UI elements on the current screen: {before.elements}

Here are two candidate actions:

Action 1: {action.0}, described semantically as {sum.0}. The rationale for this action is: {act.re.0}

Action 2: {action.1}, described semantically as {sum.1}. The rationale for this action is: {act.re.1}

Hints for making your decision: {GUIDANCE}

- Both "more options" buttons and scrolling actions may reveal new content. Evaluate which is more suitable for the goal.
- Consider the history of previous actions. If prior steps involved repeated "scroll down" actions, it is more likely that "scroll down" is the correct next step.
- If the user goal involves viewing reviews or similar tasks and the current screen already displays such content, "scroll down" may reveal more information.

Your task is to choose the best action from the two provided.

Now, provide your judgment in JSON format with the following structure:

Reason: A detailed explanation of your choice, considering the hints above.

Choice: Action 1 or Action 2.

Your output must exactly match this format:

```
{Reason: ..., Choice: Action 1 or Action 2}
```

G.6. Prompt to convert action commands into action instructions

You are a professional UI/UX analyst specializing in identifying the semantics of dual point actions between mobile UI screenshots.

Inputs:
 Current Screenshot: A visual representation of the mobile UI.
 Next Screenshot: A visual representation of the NEXT mobile UI.
 Goal: A user intent on this Mobile interface.
 touch.xy: the x,y coordinates for the touch point, as a percentage of the image dimensions.
 lift.xy: the x,y coordinates for the lift point, as a percentage of the image dimensions.
 Your task is to analyse these elements describe the precise user action in plain language and return your answer in plain string (e.g., "click the + icon", "scroll up").
 If the two screenshots are identical, please return an empty string as "".
 If the Next Screenshot does not seem to be one step away from the Current Screenshot, return an empty string as "". One step means only one interaction with the cell phone.
 Ensure there is no additional formatting, code blocks or placeholders in your response; return only a clean string without any comments

G.7. Prompt for instructional accuracy score (s_{ia})

You are an expert in evaluating the performance of a mobile emulator. The mobile emulator is designed to navigate the UI change based on human instruction.

Inputs:
 Current UI Screenshot: The present state of the cellphone's user interface.
 Next UI Screenshot: The mobile emulator generated UI indicating the next state of the cellphone's user interface based on human instruction.
 Human instruction: The action applied on the current UI screenshot.
 Your goal is to determine whether the mobile emulator successfully predicts the next UI image with current information and layout based on the current UI and the user action.
 IMPORTANT
 Format your response into a JSON map as shown below:
 {
 "Thoughts": <your thoughts and reasoning process>,
 "Status": "success" or "failure",
 }

G.8. Prompt for action readiness accuracy score (s_{ar})

You are an expert in evaluating the performance of a mobile emulator. The mobile emulator is designed to navigate the UI change based on human instruction.

Inputs:
 UI Screenshot: The mobile emulator generated UI indicating the state of the cellphone's user interface.
 User intent: The user's goal to achieve.
 Next action: the action will be applied to this UI.
 Your goal is to determine whether the next action is validated on the UI Screenshot.
 Please also indicate if it is still in the right App according to the goal.
 IMPORTANT Format your response into a JSON map as shown below:
 {
 "Thoughts": <your thoughts and reasoning process>,
 "In the right App": "yes" or "no"
 "ready for action": "yes" or "yes",
 }

G.9. Prompt to generate the action instruction based on the given GUI and the user goal

You are an autonomous intelligent agent tasked with navigating a cell phone to accomplish specific tasks. You will be provided with the following information:

1. Initial UI screenshot: A visual representation of the initial state of the cell phone's interface.
2. User Objective: This is the task you are trying to complete.
3. Previous Action: An action sequence performed on the initial UI.
4. Current UI states: A visual representation of the current state of the cell phone's interface, generated by a simulated environment. The initial image is the screenshot before actually performing all the previous actions. The current cell phone UI is generated by applying previous actions on the initial screenshot.

Your Task: Please predict a single next step action to complete the given task based on current vision states.
 To be successful, it is very important to follow the following rules:

1. You should only issue one action that is valid based on the current UI states.
2. You should only issue one action at a time. Avoid issuing multiple actions like "do A and do B".
3. Generate the action in plain text. For example, Scroll down to set the minute as 15.
4. Issue "Stop." if you think the action is already completed. Ensure you only return the action, not other formats, comments or placeholders

G.10. Prompt to evaluates whether the simulated action leads to the same outcome as the ground truth action

You are an expert in evaluating the performance of a cell phone navigation agent. The agent is designed to help a human user navigate a cellphone to complete a task.

Inputs:

Current UI Screenshot: The present state of the cellphone's user interface.

User Intent: The goal the human user aims to achieve.

Action History: The sequence of actions taken so far for you to track the progress.

Agent Simulated Action: The action suggested by the agent to achieve the user's intent.

Ground Truth Action: The correct action is needed to achieve the user's intent.

Your goal is to determine whether the agent's simulated action leads to the same outcome as the ground truth action.

Additionally, if the simulated action does not exactly match the ground truth action but is still progressing toward the correct outcome to achieve user intent, indicating that the action is "on the right track."

IMPORTANT

Format your response into a JSON map as shown below:

```
{
  "Thoughts": <your thoughts and reasoning process>,
  "Status": "success" or "failure",
  "On the right track to success": "yes" or "no"
}
```

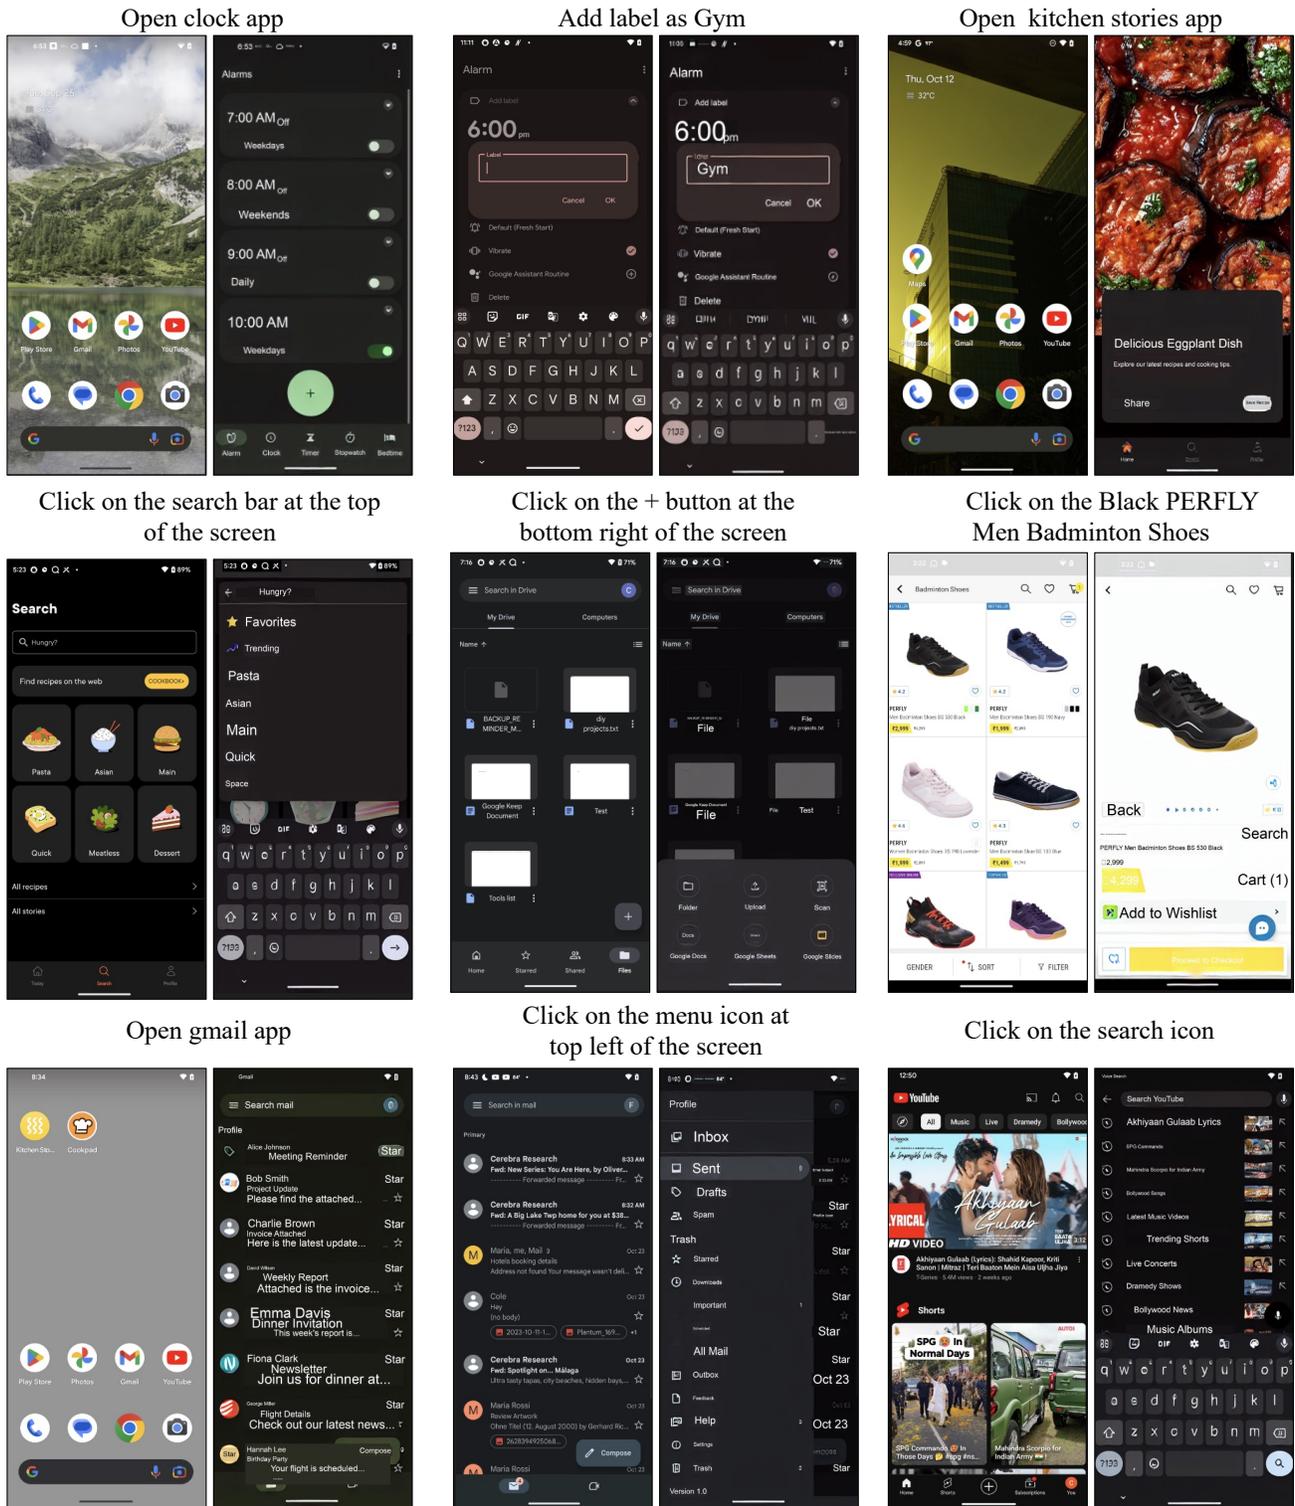


Figure 8. Visualisation of ViMo in generating the next GUI. For each example, the action is displayed at the top, with the current GUI shown on the left and the generated GUI on the right.

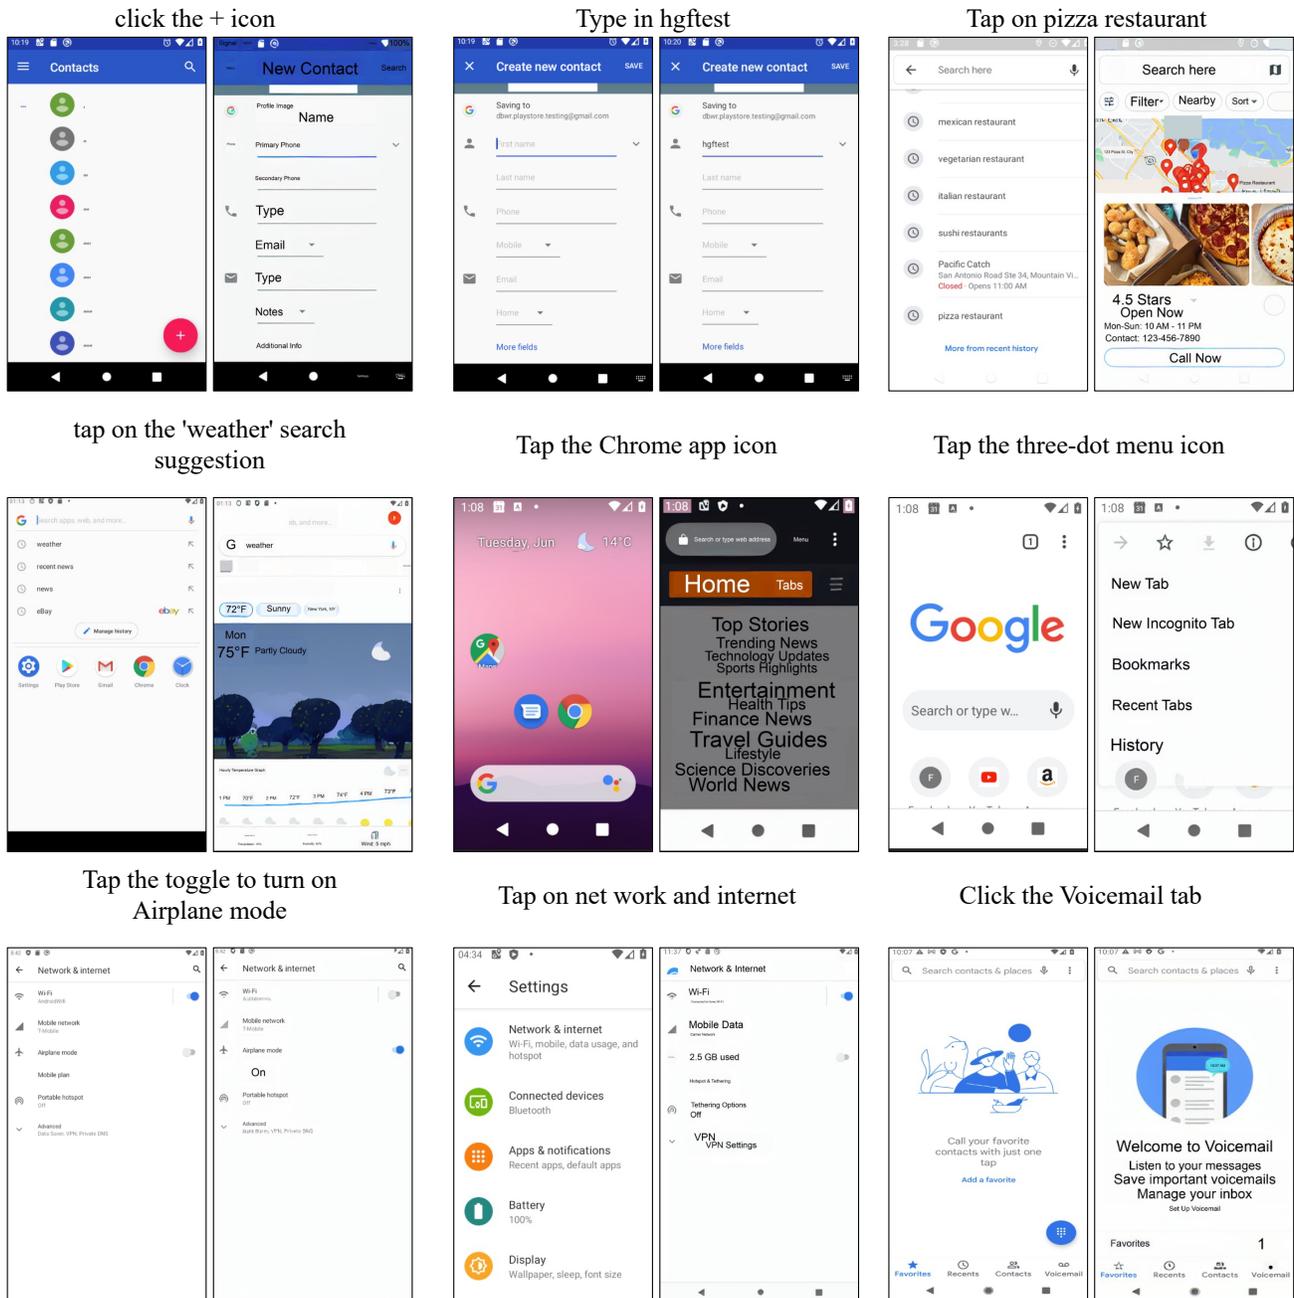


Figure 9. Visualisation of ViMo in generating the next GUI. For each example, the action is displayed at the top, with the current GUI shown on the left and the generated GUI on the right.

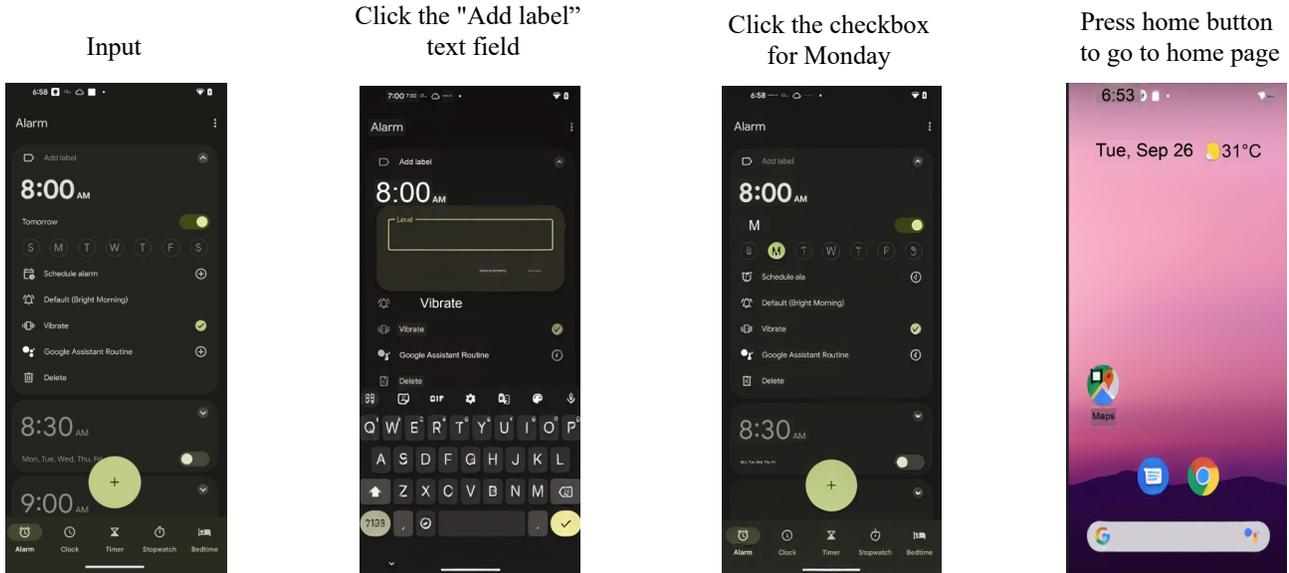


Figure 10. Visualisation of ViMo in generating GUIs given a single current GUI paired with different actions.

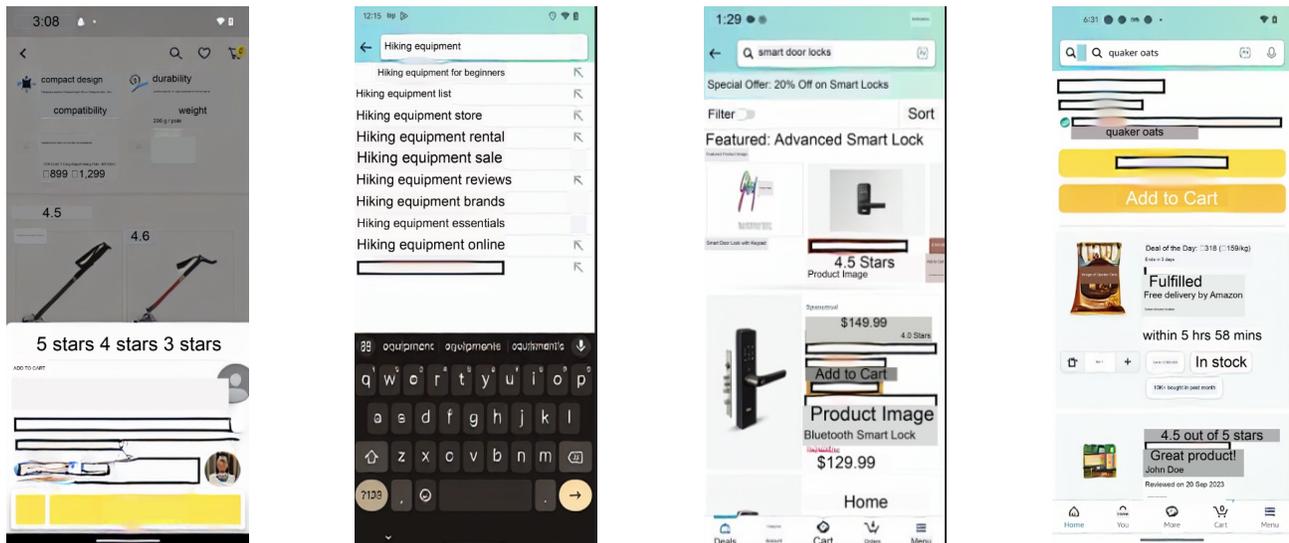


Figure 11. False examples where the text symbols are incorrectly represented, making them unrecognizable to indicate the location of text.